

**Integrating the Healthcare Enterprise**



5

**IHE IT Infrastructure  
Technical Framework**

**Volume 2a  
(ITI TF-2a)**

10

**Transactions Part A –  
Sections 3.1 – 3.28**

15

20

**Revision 13.0 – Final Text  
September 9, 2016**

25

**Please verify you have the most recent version of this document, which is published [here](#).**

## CONTENTS

1	Introduction .....	6
30	1.1 Overview of the Technical Framework .....	6
	1.2 Overview of IT Infrastructure Technical Framework Volumes 2a, 2b, and 2x, and 3 .....	7
	1.3 Audience .....	8
	1.4 Relationship to Standards .....	8
	1.5 Relationship to Real-world Architectures .....	8
35	1.6 Comments .....	9
	1.7 Copyright Permission .....	9
2	Conventions .....	10
	2.1 The Generic IHE Transaction Model .....	10
	2.2 HL7 Profiling Conventions .....	11
40	2.3 Use of Coded Entities and Coding Schemes .....	11
3	IHE Transactions .....	12
	3.1 Maintain Time [ITI-1] .....	12
	3.1.1 Scope .....	12
	3.1.2 Use Case Roles .....	12
45	3.1.3 Referenced Standard .....	12
	3.1.4 Interaction Diagram .....	13
	3.2 Get User Authentication [ITI-2] .....	14
	3.2.1 Scope .....	14
	3.2.2 Use Case Roles .....	15
50	3.2.3 Referenced Standard .....	15
	3.2.4 Interaction Diagram .....	15
	3.2.5 Extended Authentication Methods .....	16
	3.2.6 Audit Record Considerations .....	16
	3.3 Get Service Ticket [ITI-3] .....	18
55	3.3.1 Scope .....	18
	3.3.2 Use Case Roles .....	18
	3.3.3 Referenced Standard .....	18
	3.3.4 Interaction Diagram .....	18
	3.3.5 Security Considerations .....	20
60	3.4 Kerberized Communication [ITI-4] .....	20
	3.4.1 Scope .....	20
	3.4.2 Use Case Roles .....	20
	3.4.3 Referenced Standard .....	20
	3.4.4 Interaction Diagram .....	20
65	3.4.5 Security Considerations .....	23
	3.5 Join Context [ITI-5] .....	23
	3.5.1 Scope .....	23
	3.5.2 Use Case Roles .....	24
	3.5.3 Referenced Standard .....	25
70	3.5.4 Interaction Diagrams .....	25

	3.6 Change Context [ITI-6].....	29
	3.6.1 Scope.....	29
	3.6.2 Use Case Roles .....	30
	3.6.3 Referenced Standard.....	30
75	3.6.4 Interaction Diagram .....	31
	3.7 Leave Context [ITI-7] .....	35
	3.7.1 Scope.....	35
	3.7.2 Use Case Roles .....	35
	3.7.3 Referenced Standard.....	36
80	3.7.4 Interaction Diagram .....	36
	3.8 Patient Identity Feed [ITI-8] .....	37
	3.8.1 Scope.....	37
	3.8.2 Use Case Roles .....	37
	3.8.3 Referenced Standards .....	38
85	3.8.4 Interaction Diagram .....	38
	3.8.5 Security Considerations .....	47
	3.9 PIX Query [ITI-9] .....	53
	3.9.1 Scope.....	53
	3.9.2 Use Case Roles .....	53
90	3.9.3 Referenced Standard.....	53
	3.9.4 Interaction Diagram .....	54
	3.9.5 Security Considerations .....	61
	3.10PIX Update Notification [ITI-10] .....	64
	3.10.1 Scope .....	64
95	3.10.2 Use Case Roles .....	65
	3.10.3 Referenced Standard.....	65
	3.10.4 Interaction Diagram.....	66
	3.10.5 Security Considerations.....	69
	3.11Retrieve Specific Information for Display [ITI-11].....	71
100	3.11.1 Scope .....	71
	3.11.2 Use Case Roles .....	72
	3.11.3 Referenced Standards .....	72
	3.12Retrieve Document for Display [ITI-12] .....	82
	3.12.1 Scope .....	82
105	3.12.2 Use Case Roles .....	82
	3.12.3 Referenced Standards .....	82
	3.12.4 Interaction Diagram.....	83
	3.13Follow Context [ITI-13] .....	86
	3.13.1 Scope .....	86
110	3.13.2 Use Case Roles .....	87
	3.13.3 Referenced Standard.....	87
	3.13.4 Interaction Diagram.....	88
	3.14Register Document Set [ITI-14] .....	91
	3.15Provide and Register Document Set [ITI-15] .....	91
115	3.16Query Registry [ITI-16] .....	91

	3.17 Retrieve Documents [ITI-17].....	91
	3.18 Registry Stored Query [ITI-18] .....	91
	3.18.1 Scope .....	91
	3.18.2 Use Case Roles.....	92
120	3.18.3 Referenced Standards.....	92
	3.18.4 Interaction Diagram.....	93
	3.18.5 Security Considerations.....	129
	3.19 Authenticate Node [ITI-19] .....	132
	3.19.1 Scope .....	132
125	3.19.2 Use Case Roles .....	132
	3.19.3 Referenced Standards .....	133
	3.19.4 Interaction Diagram.....	133
	3.19.5 Trigger Events .....	134
	3.19.6 Message Semantics.....	134
130	3.19.7 Local User Authentication.....	137
	3.20 Record Audit Event [ITI-20] .....	139
	3.20.1 Scope .....	139
	3.20.2 Actor Roles.....	139
	3.20.3 Referenced Standards .....	139
135	3.20.4 Interaction Diagram.....	140
	3.20.5 Security Considerations.....	147
	3.20.6 Retired .....	147
	3.20.7 Audit Message Format .....	147
	3.21 Patient Demographics Query [ITI-21] .....	150
140	3.21.1 Scope .....	150
	3.21.2 Use Case Roles .....	150
	3.21.3 Referenced Standards .....	150
	3.21.4 Interaction Diagram.....	151
	3.21.5 Security Considerations.....	163
145	3.22 Patient Demographics and Visit Query [ITI-22] .....	168
	3.22.1 Scope .....	168
	3.22.2 Use Case Roles.....	168
	3.22.3 Referenced Standards .....	168
	3.22.4 Interaction Diagram.....	168
150	3.22.5 Security Considerations.....	183
	3.23 Find Personnel White Pages [ITI-23] .....	186
	3.23.1 Scope .....	186
	3.23.2 Use Case Roles .....	186
	3.23.3 Referenced Standard.....	187
155	3.23.4 Interaction Diagram.....	187
	3.24 Query Personnel White Pages [ITI-24].....	188
	3.24.1 Scope .....	188
	3.24.2 Use Case Roles .....	188
	3.24.3 Referenced Standard.....	189
160	3.24.4 Interaction Diagram.....	189

	3.24.5 LDAP Query/Response .....	189
	3.25 Intentionally Left Blank .....	201
	3.26 Intentionally Left Blank .....	201
	3.27 Intentionally Left Blank .....	201
165	3.28 Intentionally Left Blank .....	201

## 1 Introduction

170 Integrating the Healthcare Enterprise (IHE) is an initiative designed to stimulate the integration  
of the information systems that support modern healthcare institutions. Its fundamental objective  
is to ensure that in the care of patients all required information for medical decisions is both  
correct and available to healthcare professionals. The IHE initiative is both a process and a forum  
for encouraging integration efforts. It defines a technical framework for the implementation of  
175 established messaging standards to achieve specific clinical goals. It includes a rigorous testing  
process for the implementation of this framework. And it organizes educational sessions and  
exhibits at major meetings of medical professionals to demonstrate the benefits of this  
framework and encourage its adoption by industry and users.

The approach employed in the IHE initiative is to support the use of existing standards, e.g.,  
180 HL7, ASTM, DICOM, ISO, IETF, OASIS and others as appropriate, rather than to define new  
standards. IHE profiles further constrain configuration choices where necessary in these  
standards to ensure that they can be used in their respective domains in an integrated manner  
between different actors. When clarifications or extensions to existing standards are necessary,  
IHE refers recommendations to the relevant standards bodies.

This initiative has numerous sponsors and supporting organizations in different medical specialty  
185 domains and geographical regions. In North America the primary sponsors are the Healthcare  
Information and Management Systems Society (HIMSS) and the Radiological Society of North  
America (RSNA). IHE Canada has also been formed. IHE Europe (IHE-EUR) is supported by a  
large coalition of organizations including the European Association of Radiology (EAR) and  
European Congress of Radiologists (ECR), the Coordination Committee of the Radiological and  
190 Electromedical Industries (COCIR), Deutsche Röntgengesellschaft (DRG), the EuroPACS  
Association, Groupement pour la Modernisation du Système d'Information Hospitalier  
(GMSIH), Société Française de Radiologie (SFR), Società Italiana di Radiologia Medica  
(SIRM), and the European Institute for health Records (EuroRec). In Japan IHE-J is sponsored  
by the Ministry of Economy, Trade, and Industry (METI); the Ministry of Health, Labor, and  
195 Welfare; and MEDIS-DC; cooperating organizations include the Japan Industries Association of  
Radiological Systems (JIRA), the Japan Association of Healthcare Information Systems Industry  
(JAHIS), Japan Radiological Society (JRS), Japan Society of Radiological Technology (JSRT),  
and the Japan Association of Medical Informatics (JAMI). Other organizations representing  
200 healthcare professionals are invited to join in the expansion of the IHE process across  
disciplinary and geographic boundaries.

### 1.1 Overview of the Technical Framework

This document, the IHE IT Infrastructure Technical Framework (ITI TF), defines specific  
implementations of established standards to achieve integration goals that promote appropriate  
205 sharing of medical information to support optimal patient care. It is expanded annually, after a  
period of public review, and maintained regularly through the identification and correction of  
errata. The current version, Rev 13.0 for Final Text, specifies the IHE transactions defined and  
implemented as of September, 2016. The latest version of the document is always available via  
the Internet at [http://ihe.net/Technical\\_Frameworks/](http://ihe.net/Technical_Frameworks/).

210 The IHE IT Infrastructure Technical Framework identifies a subset of the functional components of the healthcare enterprise, called IHE actors, and specifies their interactions in terms of a set of coordinated, standards-based transactions. It describes this body of transactions in progressively greater depth. Volume 1 (ITI TF-1) provides a high-level view of IHE functionality, showing the transactions organized into functional units called integration profiles that highlight their capacity to address specific IT Infrastructure requirements.

215 Volumes 2a, 2b, and 2x of the IT Infrastructure Technical Framework provide detailed technical descriptions of each IHE transaction used in the IT Infrastructure Integration Profiles.

Volume 3 contains content specification and specifications used by multiple transactions. These volumes are consistent and can be used in conjunction with the Integration Profiles of other IHE domains.

220 The other domains within the IHE initiative also produce Technical Frameworks within their respective areas that together form the IHE Technical Framework. For example, the following IHE Technical Framework(s) are some of those which are available:

- IHE IT Infrastructure Technical Framework
- IHE Cardiology Technical Framework
- 225 • IHE Laboratory Technical Framework
- IHE Patient Care Coordination Technical Framework
- IHE Radiology Technical Framework

Where applicable, references are made to other technical frameworks. For the conventions on referencing other frameworks, see ITI TF-1: 1.6.3.

## 230 **1.2 Overview of IT Infrastructure Technical Framework Volumes 2a, 2b, and 2x, and 3**

The remainder of Section 1 further describes the general nature, purpose and function of the Technical Framework. Section 2 presents the conventions used in this volume to define IHE transactions.

235 Section 3 defines transactions in detail, specifying the roles for each Actor, the standards employed, the information exchanged, and in some cases, implementation options for the transaction. Section 3 is divided into two parts:

- Volume 2a: Sections 3.1 - 3.28 corresponding to transactions [ITI-1] through [ITI-28].
- Volume 2b: Sections 3.29 - 3.64 corresponding to transactions [ITI-29] through [ITI-64].

240 Volume 2x contains all appendices providing technical details associated with the transactions.

Volume 3, Section 4 contains specifications that are used by multiple transactions.

Volume 3, Section 5 contains Content Specifications.

### 1.3 Audience

The intended audience of this document is:

- 245
- IT departments of healthcare institutions
  - Technical staff of vendors planning to participate in the IHE initiative
  - Experts involved in standards development
  - Those interested in integrating healthcare information systems and workflows

### 1.4 Relationship to Standards

250 The IHE Technical Framework identifies functional components of a distributed healthcare environment (referred to as IHE actors), solely from the point of view of their interactions in the healthcare enterprise. At its current level of development, it defines a coordinated set of transactions based on ASTM, DICOM<sup>®1</sup>, HL7<sup>®2</sup>, IETF, ISO, OASIS and W3C standards. As the scope of the IHE initiative expands, transactions based on other standards may be included as  
255 required.

In some cases, IHE recommends selection of specific options supported by these standards; however, IHE does not introduce technical choices that contradict conformance to these standards. If errors in or extensions to existing standards are identified, IHE's policy is to report them to the appropriate standards bodies for resolution within their conformance and standards  
260 evolution strategy.

IHE is therefore an implementation framework, not a standard. Conformance claims for products must still be made in direct reference to specific standards. In addition, vendors who have implemented IHE integration capabilities in their products may publish IHE Integration Statements to communicate their products' capabilities. Vendors publishing IHE Integration  
265 Statements accept full responsibility for their content. By comparing the IHE Integration Statements from different products, a user familiar with the IHE concepts of actors and integration profiles can determine the level of integration between them. See ITI TF-2x: Appendix C for the format of IHE Integration Statements.

### 1.5 Relationship to Real-world Architectures

270 The IHE actors and transactions described in the IHE Technical Framework are abstractions of the real-world healthcare information system environment. While some of the transactions are traditionally performed by specific product categories (e.g., HIS, Clinical Data Repository, Radiology Information Systems, Clinical Information Systems or Cardiology Information Systems), the IHE Technical Framework intentionally avoids associating functions or actors with  
275 such product categories. For each Actor, the IHE Technical Framework defines only those

---

<sup>1</sup> DICOM is the registered trademark of the National Electrical Manufacturers Association for its standards publications relating to digital communications of medical information.

<sup>2</sup> HL7 is the registered trademark of Health Level Seven International.

functions associated with integrating information systems. The IHE definition of an Actor should therefore not be taken as the complete definition of any product that might implement it, nor should the framework itself be taken to comprehensively describe the architecture of a healthcare information system.

280 The reason for defining actors and transactions is to provide a basis for defining the interactions among functional components of the healthcare information system environment. In situations where a single physical product implements multiple functions, only the interfaces between the product and external functions in the environment are considered to be significant by the IHE initiative. Therefore, the IHE initiative takes no position as to the relative merits of an integrated  
285 environment based on a single, all-encompassing information system versus one based on multiple systems that together achieve the same end. IHE demonstrations emphasize the integration of multiple vendors' systems based on the IHE Technical Framework.

## 1.6 Comments

IHE International welcomes comments on this document and the IHE initiative. They can be  
290 submitted using the Web-based comment form at [http://www.ihe.net/ITI\\_Public\\_Comments](http://www.ihe.net/ITI_Public_Comments) or by sending an email to the co-chairs and secretary of the IT Infrastructure domain committees at [iti@ihe.net](mailto:iti@ihe.net).

## 1.7 Copyright Permission

Health Level Seven, Inc., has granted permission to the IHE to reproduce tables from the HL7  
295 standard. The HL7 tables in this document are copyrighted by Health Level Seven, Inc. The National Electrical Manufacturers Association (NEMA) has granted permission to the IHE to incorporate portions of the DICOM standard.

All rights reserved. Material drawn from these documents is credited where used.

## 2 Conventions


300 This document has adopted the following conventions for representing the framework concepts  
and specifying how the standards upon which the IHE IT Infrastructure Technical Framework is  
305 based should be applied.

### 2.1 The Generic IHE Transaction Model

Transaction descriptions are provided in Section 3. In each transaction description, the actors, the  
305 roles they play, and the transactions between them are presented as use cases.

The generic IHE transaction description includes the following components:


- Scope: a brief description of the transaction.
- Use case roles: textual definitions of the actors and their roles, with a simple diagram relating them, e.g.,:

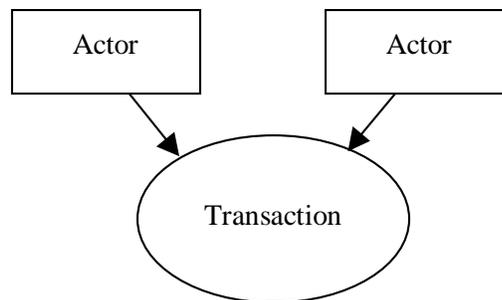

310

- *Referenced Standards*: the standards (stating the specific parts, chapters or sections thereof) to be used for the transaction.
- *Interaction Diagram*: a graphical depiction of the actors and messages that support the transaction, with related processing within an Actor shown as a rectangle and time progressing downward, similar to:

315

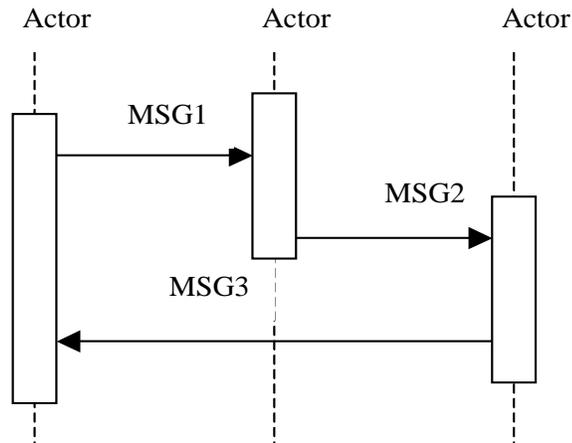

320 The interaction diagrams used in the IHE IT Infrastructure Technical Framework are modeled after those described in Grady Booch, James Rumbaugh, and Ivar Jacobson, *The Unified Modeling Language User Guide*, ISBN 0-201-57168-4. Simple acknowledgment messages are often omitted from the diagrams for brevity. One or more messages may be required to satisfy a transaction. Each message is represented as an arrow starting from the Actor initiating the message.

- 325 • *Message definitions*: descriptions of each message involved in the transaction, the events that trigger the message, its semantics, and the actions that the message triggers in the receiver.

## 2.2 HL7 Profiling Conventions

See ITI TF-2x: Appendix C for the HL7 profiling conventions as well as the networking implementation guidelines.

## 330 2.3 Use of Coded Entities and Coding Schemes

IHE does not produce, maintain or otherwise specify a coding scheme or other resource for controlled terminology (coded entities). Where applicable, coding schemes required by the HL7 and DICOM standards take precedence. In the cases where such resources are not explicitly identified by standards, implementations may utilize any resource (including proprietary or local) 335 provided any licensing/copyright requirements are satisfied.

### 3 IHE Transactions

This section defines each IHE transaction in detail, specifying the standards used, the information transferred, and the conditions under which the transaction is required or optional.


#### 3.1 Maintain Time [ITI-1]

340 This section corresponds to Transaction ITI-1 of the IHE IT Infrastructure Technical Framework. Transaction ITI-1 is used by the Time Server and Time Client Actors.

##### 3.1.1 Scope

This transaction is used to synchronize time among multiple systems.

##### 3.1.2 Use Case Roles

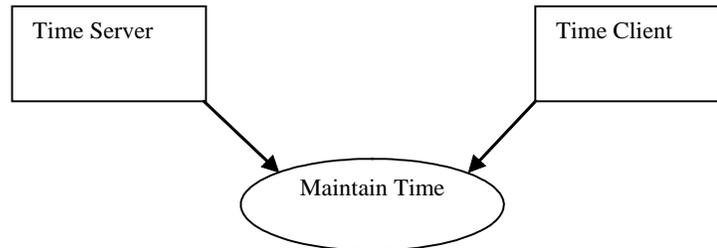

345

**Actor:** Time Server

**Role:** Responds to NTP time service queries.

**Actor:** Time Client


350 **Role:** Uses NTP or SNTP time service responses to maintain synchronization with Time Servers and maintain the local system clock.

##### 3.1.3 Referenced Standard

NTP Network Time Protocol Version 3. RFC 1305

SNTP Simple Network Time Protocol (SNTP) RFC 4330

### 3.1.4 Interaction Diagram

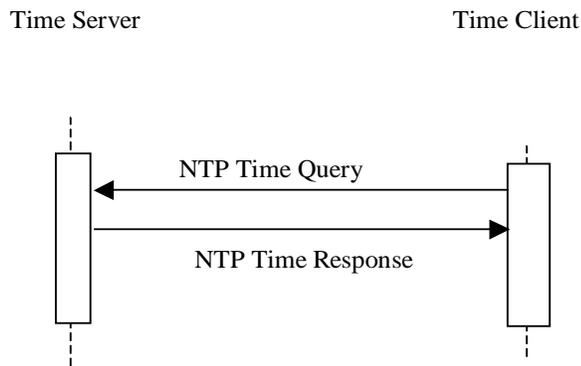

355

**Figure 3.1.4-1: Maintain Time Messages**

#### 3.1.4.1 Maintain Time

The NTP transactions are described in detail in RFC 1305. There is also extensive documentation on the transactions and recommendations on configurations and setup provided at <http://www.ntp.org>. Rather than reproduce all of that material as part of this Framework, readers are strongly encouraged to explore that site. The most common mode is the query-response mode that is described below. For other forms, see RFC 1305 and the material on <http://www.ntp.org>.

The Time Server shall support NTP (which implicitly means that SNTP clients are also supported). Secure NTP may also be supported. The Time Client shall utilize NTP when it is grouped with a Time Server. For ungrouped Time Clients with 1 second accuracy requirements, SNTP may be useable. Time Clients may also support Secure NTP.

**Table 3.1.4-1: Permissible Protocol Selections**

Protocol	Time Server	Time Client grouped with a Time Server	Time Client (1s accuracy)	Time Client (High accuracy)
SNTP	Must Support	Prohibited	Permitted	Prohibited
NTP	Must Support	Must Support	Permitted	Permitted
Secure NTP	Optional	Optional	Optional	Optional

##### 3.1.4.1.1 Trigger Events

In a query-response mode the Time Client queries the Time Server and receives a response. This transaction includes timing estimation of network delays.

##### 3.1.4.1.2 Message Semantics

The Time Client uses the Network Time Protocol (NTP) to synchronize its time with the Time Server. NTP clients can be configured to use a specific NTP server at a specific IP address, to obtain the NTP server address automatically from DHCP, and/or to discover the NTP server address automatically. Time clients shall support at least manual configuration and may support all three modes. Time Clients usually maintain time synchronization by adjusting the system

clock, so that applications continue to use the system clock facilities. The specific precision of synchronization depends upon the requirements of specific actors.

380 Implementations must support a time synchronization accuracy with a median error of less than one second.

385 There is a Simple Network Time Protocol (SNTP) RFC 4330 defined that can provide one second accuracy for Time Clients. It uses the exact same protocol as NTP, but does not include the measurement data used by the NTP high-accuracy statistical estimation algorithm. It has a lower implementation cost because it omits the measurements and statistical estimation needed to achieve higher accuracy. This omission of the statistical estimation makes it unsuitable for use when grouped with a Time Server. Its use is permitted for Time Clients that are not grouped with a Time Server.

390 Note: 1. The Time Client Actor can often be implemented by using components provided by operating systems. Some offer only SNTP while others offer the choice of SNTP or NTP clients.  
2. SNTP may achieve better than 1 second synchronization when combined with careful hardware, software, and custom network design. This network design will include restrictions on cabling design, hubs, routers, etc. that are outside the scope of the CT Profile and not verifiable except on a site by site basis.

395

The use of Secure NTP is not required. The risk of subversion of the time base to conceal penetration is considered very low, and the operational costs of maintaining Secure NTP too high in most environments.

### 3.1.4.1.3 Expected Actions

400 The Time Server and Time Client will maintain synchronization to UTC. The Time Client maintains a statistical estimation process utilizing time estimates and network delay estimates from one or more Time Servers. This statistical estimation process yields a time estimate that is used to continually adjust the system clock.

405 Note: The relationship between the local reported time, UTC, and battery-backed clock is often a source of confusion. Different hardware and operating systems have different configuration requirements. These should be clearly documented and made clear in the user interface so that field service and operational staff do not introduce errors.

## 3.2 Get User Authentication [ITI-2]


410 This section corresponds to Transaction ITI-2 of the IHE IT Infrastructure Technical Framework. Transaction ITI-2 is used by the Client Authentication Agent and Kerberos Authentication Server Actors.

### 3.2.1 Scope

415 This transaction is used to authenticate an enterprise-wide user identity. A challenge-response method verifies that the user knows the correct password. Once the user is authenticated, the Kerberos Authentication Server sends a Ticket Granting Ticket (TGT) to the Client Authentication Agent to permit optimization of subsequent interactions. The TGT acts as a substitute for repeated login/password type activity.

This transaction is equivalent to what is called the “Authentication Service” in RFC 1510.

### 3.2.2 Use Case Roles

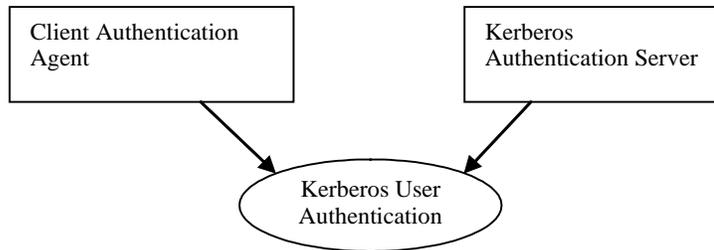

420

**Actor:** Client Authentication Agent.

**Role:** Communicates authentication information to the Kerberos Authentication Server, receives a TGT, and performs internal TGT management.

425

**Actor:** Kerberos Authentication Server. In RFC 1510 this is called a Key Distribution Center (KDC).

**Role:** Verifies the authentication information, creates a TGT, and sends it to the Client Authentication Agent.

### 3.2.3 Referenced Standard


RFC 1510 The Kerberos Network Authentication Service (V5)

430

### 3.2.4 Interaction Diagram

The Client Authentication Agent communicates to the Kerberos Authentication Server a Kerberos Authentication Service Request (KRB\_AS\_REQ). This message identifies the user, the name of the ticket-granting service and authentication data. The authentication data is usually a timestamp encrypted with the user’s long-term key. (See RFC 1510 for the exception cases.)

435

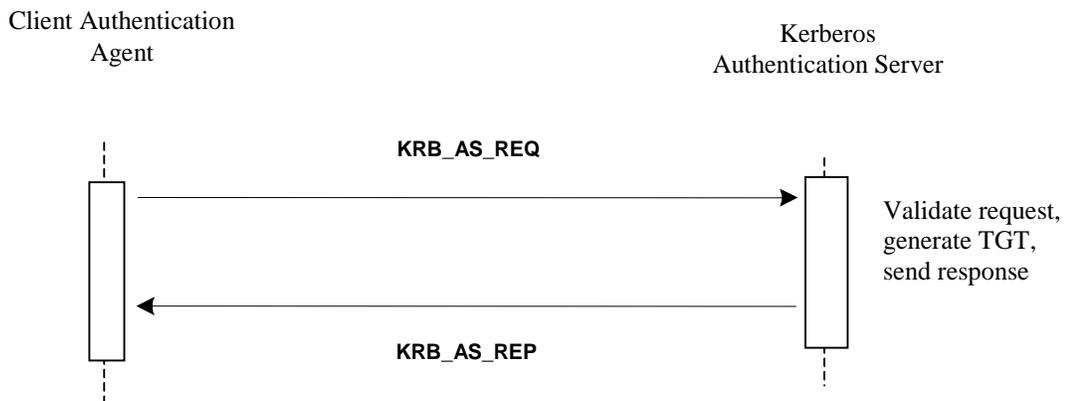

**Figure 3.2.4-1: Get User Authentication Messages**

### **3.2.4.1 Get User Authentication (Request/Response)**

#### 440 **3.2.4.1.1 Trigger Events**

The Kerberos User Authentication transactions normally take place:

1. Upon login or session start for a new user, and
2. Shortly before expiration of a TGT. TGT timeouts are selected to minimize the need for this transaction, but they may expire prior to user logout/ session complete.

445 When the Client Authentication Agent supports the Authentication for User Context Option, the Client Authentication Agent shall resolve any Context Manager interface issues before starting the user authentication. For instance the Client Authentication Agent needs to be sure that it will be accepted by the Context Manager as the one and only user authenticator in the context for this user session. Similar issues may apply with non-IHE uses of CCOW.

#### 450 **3.2.4.1.2 Message Semantics**

The Client Authentication Agent shall support use of this transaction with the Kerberos user name/password system defined in RFC 1510. The username and password shall consist of the 94 printable characters specified in the International Reference Version of ISO-646/ECMA-6 (aka U.S. ASCII).

#### 455 **3.2.4.1.3 Expected Actions**

The Client Authentication Agent shall perform TGT management, so that subsequent activities can re-use TGTs from a credentials cache. The Client Authentication Agent shall ensure that a user has access to only to his or her own tickets (both TGT and Service Tickets). This is most often done by clearing the credentials cache upon user logout or session completion.

460 When the Client Authentication Agent supports the Authenticator for User Context Option, the agent shall perform the Change Context Transaction to set the user identity in the context managed by the Context Manager Actor.

465 When the user session ends, the Client Authentication Agent shall remove the user credentials from its cache. If it supports the Authenticator for User Context Option, the agent shall perform the Change Context Transaction to set the user to NULL prior to removing the user credentials.

### **3.2.5 Extended Authentication Methods**

470 The Kerberos challenge-response system used by this Integration Profile can be used to verify users by means of many authentication mechanisms. The mechanism specified in this profile is the Kerberos username and password system. Other methods such as smart cards and biometrics have also been documented but not standardized. (See ITI TF-1: Appendix D for a discussion of alternate authentication mechanisms.)

### **3.2.6 Audit Record Considerations**

The Client Authentication Agent shall produce the ATNA UserAuthenticated event for each Get Authentication [ITI-2] transaction with the EventTypeCode equal to Login or Failure as

475 appropriate. If the application knows about logout, this shall produce a UserAuthentication event with the eventTypeCode of Logout. The UserName element shall be the Kerberos identity in the form of username@realm.

	Field Name	Opt	Value Constraints
<b>Event</b> AuditMessage/ EventIdentification	EventID	M	EV(110114, DCM, "UserAuthenticated")
	EventActionCode	M	"E" (Execute)
	EventDateTime	M	not specialized
	EventOutcomeIndicator	M	not specialized
	EventTypeCode	M	EV(110122, DCM, "Login") EV(110123, DCM, "Logout")
<b>Source (1)</b>			
<b>Human Requestor (1)</b>			
<b>Destination (0)</b>			
<b>Audit Source (Client Authentication Agent) (1)</b>			
<b>Participant Object (0)</b>			

Where:

<b>Source</b> AuditMessage/ ActiveParticipant	UserID	M	The process ID as used within the local operating system in the local system logs.
	AlternativeUserID	U	not specialized
	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	M	EV(110150, DCM, "Application")
	NetworkAccessPointTypeCode	M	"1" for machine (DNS) name, "2" for IP address
	NetworkAccessPointID	M	The machine name or IP address

480

<b>Human Requestor (if known)</b> AuditMessage/ ActiveParticipant	UserID	M	Identity of the human that initiated the transaction.
	AlternativeUserID	U	not specialized
	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	U	not specialized
	NetworkAccessPointTypeCode	U	not specialized
	NetworkAccessPointID	U	not specialized

<b>Audit Source</b> AuditMessage/ AuditSourceIdentification	AuditSourceID	U	not specialized
	AuditEnterpriseSiteID	U	not specialized
	AuditSourceTypeCode	U	not specialized


485 **3.3 Get Service Ticket [ITI-3]**

This section corresponds to Transaction ITI-3 of the IHE IT Infrastructure Technical Framework. Transaction ITI-3 is used by the Client Authentication Agent and Kerberos Authentication Server Actors.

**3.3.1 Scope**

490 The Client Authentication Agent uses this transaction to obtain the service ticket that will be sent to a Kerberized Server to authenticate this user to a Kerberized Server.

**3.3.2 Use Case Roles**

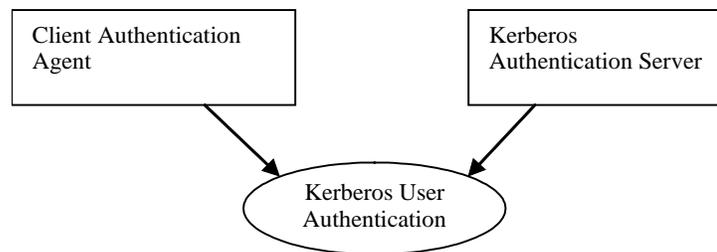

495 **Actor:** Client Authentication Agent.

**Role:** Client communicates authentication information to the Kerberos Authentication Server, receives a Service Ticket, and performs internal ticket management.

**Actor:** Kerberos Authentication Server. In RFC 1510 this is called a Key Distribution Center (KDC).


500 **Role:** Verifies the authentication information, creates a ticket, and sends it to the Client Authentication Agent Actor.

**3.3.3 Referenced Standard**

RFC 1510 The Kerberos Network Authentication Service (V5)

**3.3.4 Interaction Diagram**

505

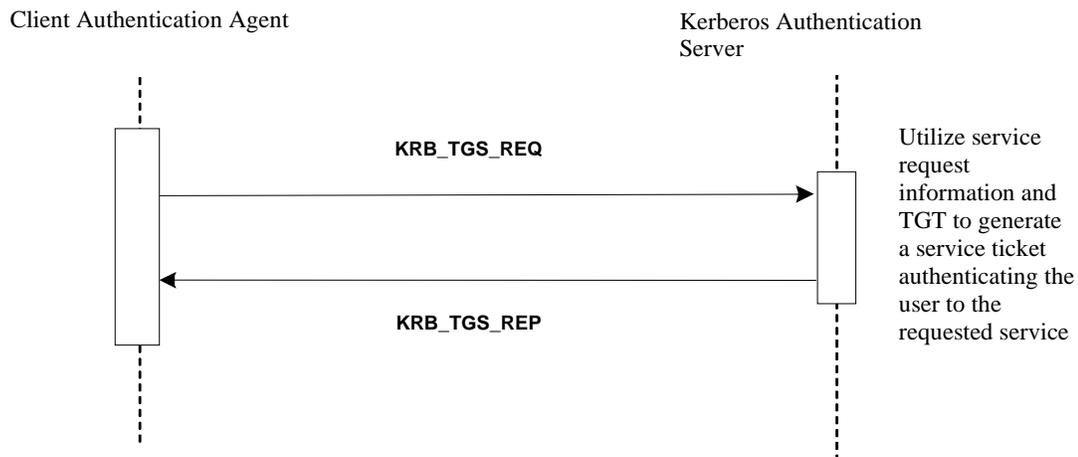

### 3.3.4.1.1 Trigger Events

510 A service ticket is requested prior to communicating with a Kerberized Server. This ticket will be provided to that service as part of the Kerberized communication process.

### 3.3.4.1.2 Message Semantics

515 The Client Authentication Agent Actor requests credentials for a service by sending the Kerberos Authentication Server a Kerberos Ticket-Granting Service Request (KRB\_TGS\_REQ). This message includes the user's name, an authenticator encrypted with the user's logon session key, the TGT obtained in the Get User Authentication Transaction, and the name of the service for which the user wants a ticket.

520 When the Kerberos Authentication Server receives KRB\_TGS\_REQ, it decrypts the TGT with its own secret key, extracting the logon session key. It uses the logon session key to decrypt the authenticator and evaluates that. If the authenticator passes the test, the Kerberos Authentication Server extracts the authorization data from the TGT and invents a session key for the client to share with the Kerberized Server Actor that supports the service. The Kerberos Authentication Server encrypts one copy of this session key with the user's logon session key. It embeds another copy of the session key in a ticket, along with the authorization data, and encrypts this ticket with the service's long-term key. The Kerberos Authentication Server then sends these credentials back to the client in a Kerberos Ticket-Granting Service Reply (KRB\_TGS\_REP).

525 There are no IHE specific extensions or modifications to the Kerberos messaging.

### 3.3.4.1.3 Expected Actions

530 When the Client Authentication Agent receives the reply, it uses the logon session key to decrypt the session key to use with the service, and stores the key in its credentials cache. Then it extracts the ticket for the service and stores that in its cache. The client shall maintain the ticket in the credentials cache for later use.

#### 3.3.4.1.4 Service Registration

535 The Kerberized Communication services supported in an enterprise shall be registered on the Kerberos Authentication Server according to the RFC 1510 protocol specification used. The registration of the service on the KDC is outside the scope of this profile.

#### 3.3.5 Security Considerations

The Get Service Ticket [ITI-3] Transaction is not required to log an ATNA UserAuthentication event in the case of successful communications. An ATNA UserAuthentication event shall be logged when the communications fails for the purpose of authentication failure.


### 540 3.4 Kerberized Communication [ITI-4]

This section corresponds to Transaction ITI-4 of the IHE IT Infrastructure Technical Framework. Transaction ITI-4 is used by the Client Authentication Agent and Kerberized Server Actors.

#### 3.4.1 Scope

545 This section specifies the details of the association of a Kerberos user identity with a session for a session oriented protocol, or a transaction for a transaction oriented protocol.

#### 3.4.2 Use Case Roles

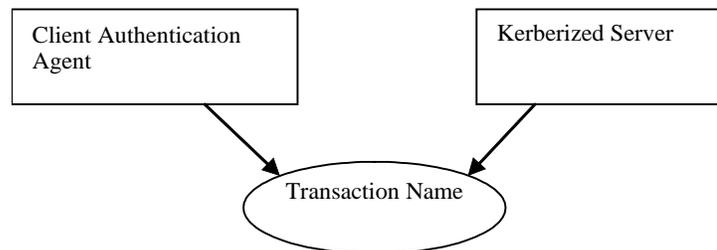

550 **Actor:** Client Authentication Agent

**Role:** Provides appropriate ticket as part of the connection or session management for another protocol.


**Actor:** Kerberized Server

555 **Role:** Accepts and verifies the ticket to perform user-identity-related services as part of the connection or session management for another protocol.

#### 3.4.3 Referenced Standard

RFC 1510 The Kerberos Network Authentication Service (V5)

#### 3.4.4 Interaction Diagram

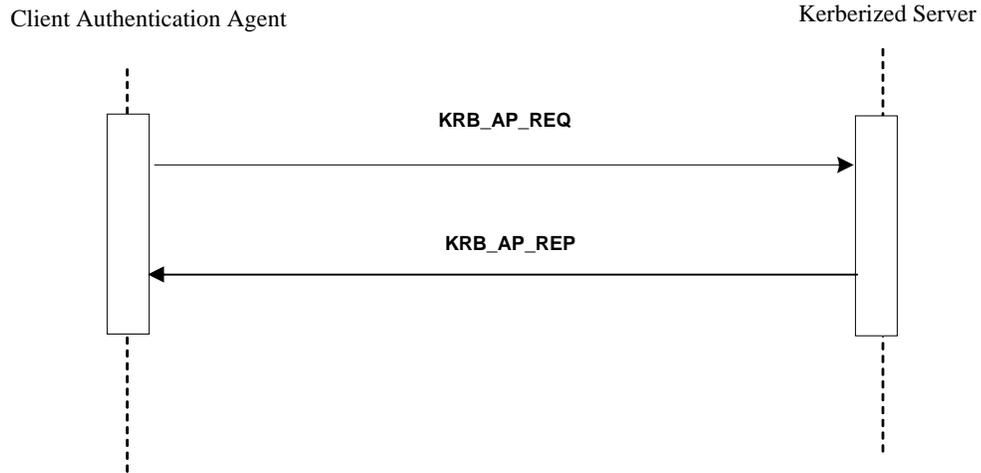

560

**Figure 3.4-1: Kerberized Communications**

### 3.4.4.1 Kerberized Communications

565 The sequence diagram above describes information flow that can be encapsulated in a variety of different protocol startup sequences. The specific details for this encapsulation are defined as part of the definition of Kerberizing a specific kind of communication protocol.

#### 3.4.4.1.1 Trigger Events

This occurs at the beginning of a session or as part of each session-less transaction.

#### 3.4.4.1.2 Message Semantics

570 The Client Authentication Agent Actor requests service from a Kerberized Server by sending the server a Kerberos Application Request (KRB\_AP\_REQ). This message contains an authenticator encrypted with the session key, the ticket obtained in the Get Service Ticket Transaction, and a flag indicating whether the client wants mutual authentication. (The setting of this flag is either specified by the rules of the Kerberized communications, or is an option of the specific  
575 Kerberized protocol.)

The Kerberized Server receives KRB\_AP\_REQ, decrypts the ticket, and extracts the authorization data and the session key. The server uses the session key to decrypt the authenticator and then evaluates the timestamp inside. If the authenticator passes the test, the server looks for a mutual authentication flag in the client's request for protocols that support  
580 mutual authentication. If the flag is set, the server uses the session key to encrypt the time supplied by the Client Authentication Actor and returns the result in a Kerberos Application Reply (KRB\_AP\_REP).

The actual encoding and exchange of the KRB\_AP\_REQ and KRB\_AP\_REP are defined as part of the definition of the specific Kerberized protocol.

585 **3.4.4.1.3 Expected Actions**

When the Client Authentication Actor receives KRB\_AP\_REP, it decrypts the server's authenticator with the session key it shares with the server and compares the time returned by the service with the time in the client's original authenticator. If the times match, the client knows that the service is genuine, and the connection proceeds.

590 If no mutual authentication is requested, the other IHE actors proceed with their IHE transactions. These transactions are identified as being requested by the authenticated user. The other actors will utilize this information for other purposes, such as confirming user authorization or logging user actions into audit trails.


**3.4.4.2 Kerberized HTTP**

595 Kerberized HTTP shall use SPNEGO-HTTP  
(see <http://www.ietf.org/internet-drafts/draft-brezak-spnego-http-04.txt>)

Note: At the time of publication there were no Kerberized HTTP normative standards. There are three relatively well-documented non-normative specifications. In addition, there are commercial and open source implementations of this specification for web and application servers. It was decided to use the Kerberized HTTP specification that is implemented by Microsoft Internet Explorer (MSIE) because many healthcare desktops use MSIE.

600

The following figure shows a typical message sequence for Kerberized HTTP.

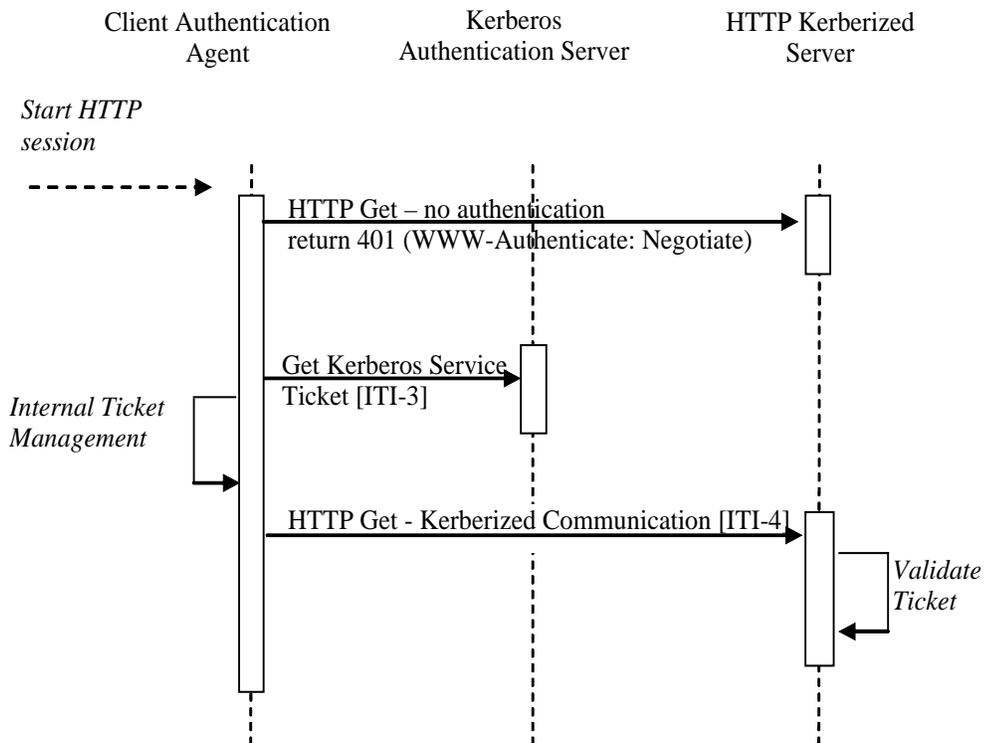

605

**Figure 3.4-2: Kerberized HTTP**

There is also documentation on the transactions, configuration, and troubleshooting these configurations. Rather than reproduce all of that material as part of this Framework, readers are strongly encouraged to explore these references.

610 (See <http://support.microsoft.com/default.aspx?scid=kb;en-us;326985>)

#### **3.4.4.2.1 Trigger Events**

This transaction occurs at the beginning of each HTTP transaction.

615 **Note:** When the workstation is properly configured utilizing Microsoft Internet Explorer these transactions are transparent. A prompt for username, password, and domain is an indication of an improperly configured component.

#### **3.4.4.2.2 Message Semantics**

620 This IHE profile recognizes that the SPNEGO-HTTP method allows the client side to return Kerberos credentials or NTLM credentials. This IHE profile thus restricts the transactions to the Kerberized credentials.

#### **3.4.4.3 Kerberized DICOM**

The Kerberization of DICOM has been proposed and is under development. There is not a finished standard at this time.

#### **3.4.4.4 Kerberized HL7**

625 The Kerberization of HL7 has been proposed and is under development. There is not a finished standard at this time.

#### **3.4.5 Security Considerations**

630 The Kerberized Communications [ITI-4] Transaction is not required to log an ATNA UserAuthentication event in the case of successful communications. An ATNA UserAuthentication event shall be logged when the communications fails for the purpose of authentication failure.

### **3.5 Join Context [ITI-5]**

635 This section corresponds to Transaction ITI-5 of the IHE IT Infrastructure Technical Framework. Transaction ITI-5 is used by the Patient Context Participant, User Context Participant, Client Authentication Agent and Context Manager Actors.

#### **3.5.1 Scope**

Any of the context participant actors using this Transaction (Patient Context Participant, User Context Participant, and Client Authentication Agent) may locate and join a context management session specific to the workstation on which the instigating user is interacting.


640 A Context Participant Actor shall first locate the instance of the Context Manager Actor via technology specific methods as defined in the *HL7 Context Management "CCOW"* technology

mapping documents. Once the context manager reference is returned, the Context Participant Actor issues a join method to the context manager, which returns a unique participant identifier. User Context Participant and Client Authentication Agent shall use this identifier along with a shared secret as inputs to a two stage secure binding process, which results in the exchange of public keys between the two actors.

If an implementation groups two or more context participant actors, this Transaction shall be performed only once on a launch of an application in which those actors are grouped. All grouped actors share the same common context. If at least one of the grouped actors is a User Context Participant or a Client Authentication Agent, this transaction shall include the two-stage secure binding process.

The semantics of the methods used in this Transaction are defined in the documents HL7 Context Management “CCOW” Standard: Component Technology Mapping: ActiveX or HL7 Context Management “CCOW” Standard: Component Technology Mapping: Web. A Context Participant Actor can implement either technology. The Context Manager Actor shall support both technologies in order to interoperate with joining participants implementing the technology of their choice.

### 3.5.2 Use Case Roles

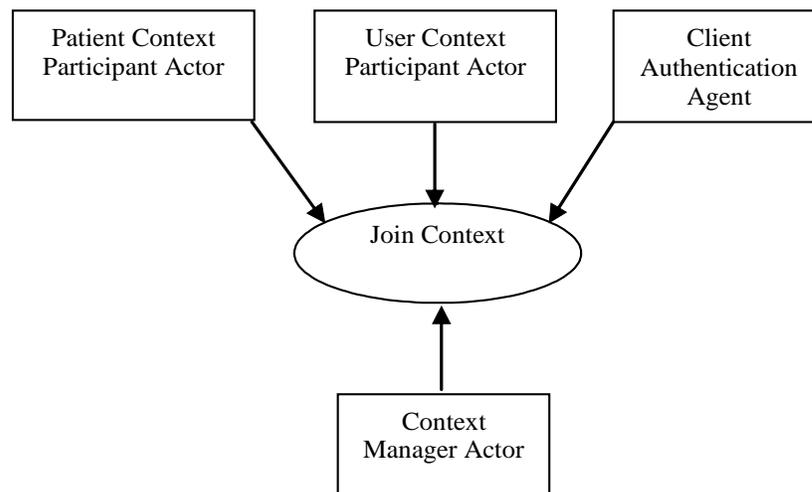

660

**Actor:** Patient Context Participant

**Role:** Initiates establishment of context session connection with the Context Manager so as to be able to change and follow Patient Subject changes in the common context.

665 **Actor:** User Context Participant

**Role:** Initiates establishment of a secure context session connection with the Context Manager so as to be able to follow User Subject changes in the common context.

**Actor:** Client Authentication Agent

670 **Role:** Initiates establishment of a secure context session connection with the Context Manager so as to be able to perform User Subject changes in the common context.

**Actor:** Context Manager

**Role:** Responds to the request to join the context session from the context participant.

### 3.5.3 Referenced Standard

HL7 Context Management “CCOW” Standard, Version 1.4:


675 Technology and Subject Independent Architecture

Component Technology Mapping: ActiveX


Component Technology Mapping: Web

### 3.5.4 Interaction Diagrams

680 The Join Context Transaction involves a different set of messages depending on the type of subjects the context participant is interested in, either Patient subject, User subject or both Patient and User subjects.

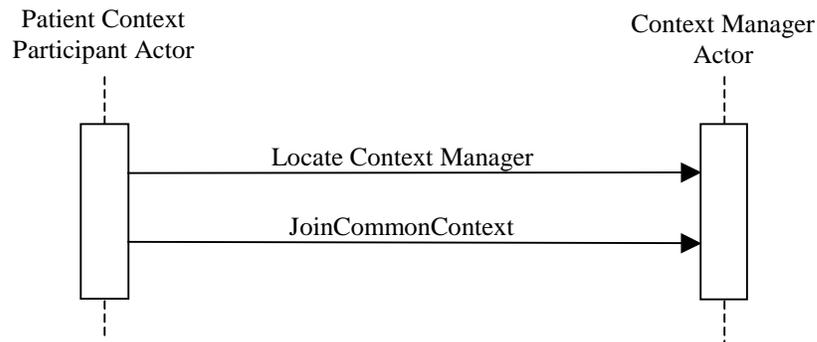

**Figure 3.5-1: Patient Subject Join Context Interaction Diagram**

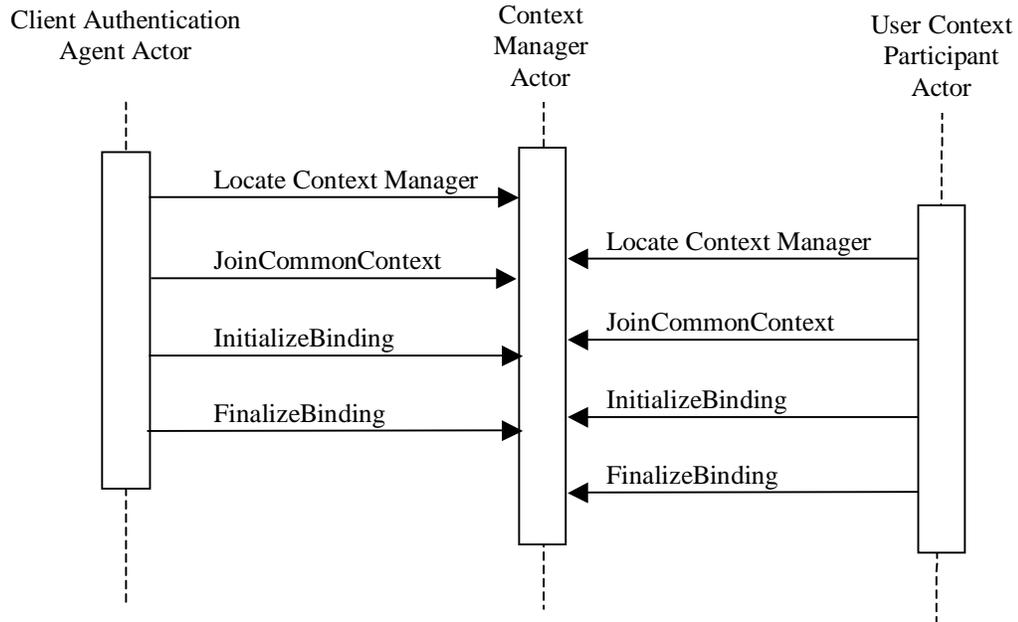

685

**Figure 3.5-2: User Subject Join Context Interaction Diagram**

### 3.5.4.1 Join Context – Locate Method

690 To join the common context upon launch of an application, it is necessary for the context participant to locate the Context Manager that supports context management for the user's workstation. This is achieved by the invocation of the Locate method in accordance with specifications of the *HL7 Context Management "CCOW" Standard*.

#### 3.5.4.1.1 Trigger Events

695 The Locate method is triggered by the user launch of an application that contains one of the following actors: Patient Context Participant, User Context Participant or Client Authentication Agent.

#### 3.5.4.1.2 Message Semantics

700 In a Web/HTTP implementation, Locate is defined as a method of the ContextManagementRegistry interface. The IHE Context Manager Actor provides this interface for the context participants to call upon, and thus implements the CCOW defined Context Management Registry, which is used to locate the appropriate instance of the Context Manager.

In an ActiveX implementation, the context participants determine the location of the instance of Context Manager from the operating system registry.

#### 3.5.4.1.3 Expected Actions

705 The Locate method invocation is specific to the Web technology mapping. In this case, the Content Manager shall return the valid URL of the Context Manager instance or a CCOW

defined UnableToLocate exception. Refer to the *HL7 Context Management “CCOW” Standard: Component Technology Mapping: Web/HTTP*, Chapter 3 for the details of the response specifications.

#### 710 **3.5.4.2 Join Context – JoinCommonContext Method**

The JoinCommonContext method is invoked by the one of the following actors: Patient Context Participant, User Context Participant or Client Authentication Agent.

##### **3.5.4.2.1 Trigger Events**

715 The JoinCommonContext method is triggered by the valid response of the Locate method with a reference to the context manager.

##### **3.5.4.2.2 Message Semantics**

720 JoinCommonContext is defined as a method on the ContextManager interface. It shall be invoked by a Context Participant Actor to complete the establishment of the secure context session. A Context Participant Actor shall provide parameters for this method as specified in the CCOW Standard.

Refer to the *HL7 Context Management “CCOW” Standard: Technology and Subject-Independent Architecture* document, Section 17.3.6.3, for a detailed description of the parameters associated with this method.

##### **3.5.4.2.3 Expected Actions**

725 If the JoinCommonContext method is successful, the Context Manager shall issue the invoking Actor a unique context participant identifier which is to be used until the context session is terminated by either a Context Participant Actor or the Context Manager Actor.

If the method fails a descriptive CCOW exception will be returned.

730 After the context session is established, the Context Manager Actor shall periodically verify availability of a Context Participant Actor by invoking the Ping method on the ContextParticipant interface as specified in the CCOW Standard. Refer to the *HL7 Context Management “CCOW” Standard: Technology and Subject-Independent Architecture* document, Section 17.3.7.6, for a detailed description of the parameters associated with this method.

735 Should the Context Manager Actor need to terminate an established context session (for example, in a case of restart), it shall inform the context participants of such action by invocation of the CommonContextTerminated method on the ContextParticipant interface as specified in the CCOW Standard. Refer to the *HL7 Context Management “CCOW” Standard: Technology and Subject-Independent Architecture* document, Section 17.3.7.5, for a detailed description of the parameters associated with this method.

740 The success of this method signifies completion of the Join Context Transaction for the actors intending to participate only in the patient context.

### **3.5.4.3 Join Context – InitializeBinding Method**

The InitializeBinding method is invoked by the one of the following actors intending to participate in a user context: User Context Participant or Client Authentication Agent.

#### 745 **3.5.4.3.1 Trigger Events**

The InitializeBinding method is triggered by the valid response of the JoinContext method.

#### **3.5.4.3.2 Message Semantics**

750 InitializeBinding is defined as a method on the SecureBinding interface and allows a Context Participant Actor and Context Manager to verify each other's identity and supply the Context Manager's public key to the requesting context participant.

In the invocation of this method, context participant supplies the application identification and a digest produced from that identification concatenated with a shared secret. The shared secret is known in CCOW terms as an applications passcode. The passcode shall be site configurable.

755 Refer to the *HL7 Context Management "CCOW" Standard: Technology and Subject-Independent Architecture* document, Section 17.3.12.2, for a description of the parameters associated with this method, to be issued by the Context Participant Actor.

#### **3.5.4.3.3 Expected Actions**

760 Performing the InitializeBinding method, the Context Manager verifies the identity of a requesting context participant and responds with the message containing its public key. Refer to the *HL7 Context Management "CCOW" Standard: Technology and Subject-Independent Architecture* document, Section 17.3.12.2, for the specifics of the response formation.

### **3.5.4.4 Join Context – FinalizeBinding Method**

The FinalizeBinding method is invoked by the one of the following actors: User Context Participant or Client Authentication Agent.

#### 765 **3.5.4.4.1 Trigger Events**

The FinalizeBinding method is triggered by the valid response of the InitializeBinding method.

#### **3.5.4.4.2 Message Semantics**

FinalizeBinding is defined as a method on the SecureBinding interface and allows a Context Participant Actor to supply the Context Manager with its public key.

770 In the invocation of this method, the context participant supplies its public key and a digest digitally signed with its private key.

Refer to the *HL7 Context Management "CCOW" Standard: Technology and Subject-Independent Architecture* document, Section 17.3.12.3, for a description of the parameters associated with this method, to be issued by the Context Participant Actor.

775 **3.5.4.4.3 Expected Actions**

Performing the FinalizeBinding method, the Context Manager verifies the identity of a requesting context participant and accepts or rejects its public key. Refer to the *HL7 Context Management “CCOW” Standard: Technology and Subject-Independent Architecture* document, Section 17.3.12.3, for the specifics of the response formation.

780 The success of this method signifies completion of the Join Context Transaction for the actors intending to participate in the user context.

**3.6 Change Context [ITI-6]**

This section corresponds to Transaction ITI-6 of the IHE IT Infrastructure Technical Framework. Transaction ITI-6 is used by the Context Participant and Context Manager Actors.

785 **3.6.1 Scope**

This transaction allows for an application supporting the Context Participant Actor to change the values for one or more context subjects, forcing other Context Participant Actors to synchronize based on the new context values.

790 The Change Context Transaction is composed of multiple methods as defined by the *HL7 Context Management “CCOW” Standard*. There are two key characteristics to this transaction. The first is that the transaction has multiple phases consisting of instigating the change, surveying the other participants, and finally publishing the decision as to whether the context changed or not. The second characteristic is that the context change involves a specific subject. For the Patient Context Participant Actor the subject being changed is the patient subject. For the  
795 Client Authentication Agent Actor the subject being changed is the user subject. Applications that implement only the Patient Context Participant Actor shall not expect the user subject to be set in context.


800 The semantics of the methods used are defined in the documents *HL7 Context Management “CCOW” Standard: Component Technology Mapping: ActiveX* or *HL7 Context Management “CCOW” Standard: Component Technology Mapping: Web*, in conjunction with the *HL7 Context Management “CCOW” Standard: Subject Data Definitions* document. The Context Participant Actor can choose the technology implementation it wishes to implement. The Context Manager Actor must support both technology implementations in order to accommodate whichever implementation a participant ends up choosing.

805 In the case where Patient Context Participant Actors use identifiers from different patient identifier domains the Context Manager Actor shall be grouped with the Patient Identifier Cross-reference Consumer Actor and the corresponding PIX Query transaction as defined in Section 3.9 to retrieve all identifiers the patient is known by. The IHE Context Manager Actor encompasses more than a CCOW context manager function. See ITI TF-2x: Appendix D for a  
810 complete discussion of the grouping of these two actors.

The CCOW architecture is defined as a set of components that implement defined interfaces and their detailed methods as specified in the *HL7 Context Management “CCOW” Standard: Technology Independent Architecture* document. This structure is different than the traditional

815 IHE network transaction. As is depicted in the interaction diagram in Section 3.6.4, the IHE Change Context Transaction is composed of multiple CCOW-defined methods.

### 3.6.2 Use Case Roles

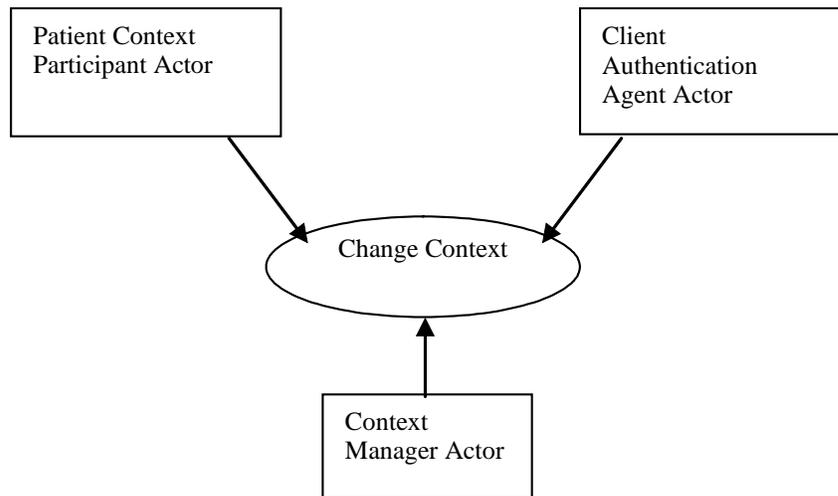

820 **Actor:** Client Authentication Agent

**Role:** Initiates context change for user subject by supplying new context values.

**Actor:** Patient Context Participant

825 **Role:** Initiates context change for patient subject by supplying new context values. After receiving the context survey results it finalizes context change decision. Applications containing this Actor without a patient lookup function would not use this transaction.

**Actor:** Context Manager


**Role:** Manages Change Context Transaction lifecycle.

### 3.6.3 Referenced Standard

HL7 Context Management “CCOW” Standard, Version 1.4:

- 830 Technology and Subject Independent Architecture
- Component Technology Mapping: ActiveX
- Component Technology Mapping: Web
- Subject Data Definitions

### 3.6.4 Interaction Diagram

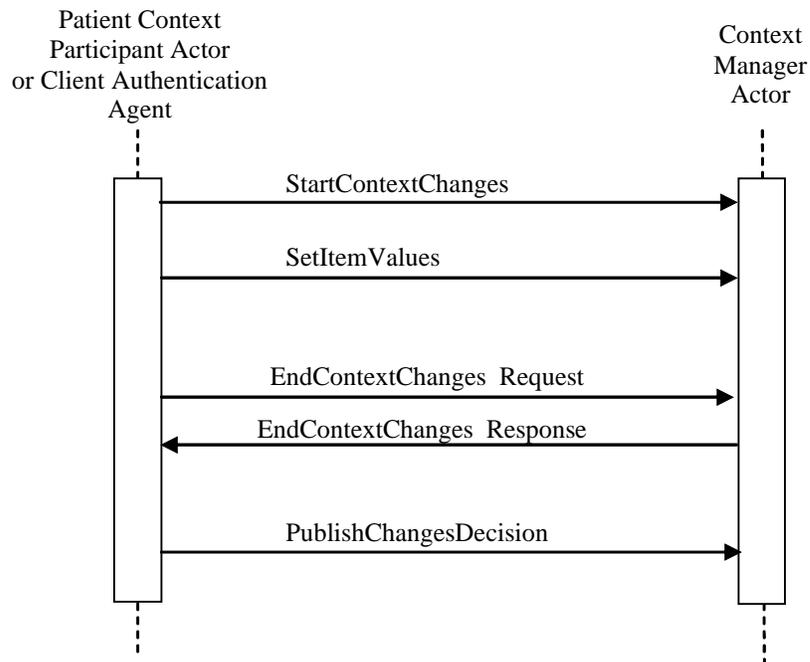

835

**Figure 3.6-1: Change Context sequence**

#### 3.6.4.1 Context Change – StartContextChanges Method

##### 3.6.4.1.1 Trigger Events

840 This method is triggered by a specific user gesture. The user gesture that triggers this transaction in for the Patient Context Participant Actor is one of selecting a patient. The user gesture that triggers this transaction for the Client Authentication Agent Actor is authentication of a user.

##### 3.6.4.1.2 Message Semantics

845 The Patient Context Participant and/or the Client Authentication Agent Actor will issue a StartContextChanges method of the ContextManager interface. Refer to the *HL7 Context Management “CCOW” Standard: Technology and Subject-Independent Architecture* document, Section 17.3.6.5, for a more detailed description of the parameters associated with this method. IHE specifies no restrictions or extensions to the CCOW definition of the StartContextChanges method.

##### 850 3.6.4.1.3 Expected Actions

855 The Context Manager Actor returns the pending context coupon. Refer to the *HL7 Context Management “CCOW” Standard: Technology and Subject-Independent Architecture* document, Section 17.3.6.5, for a more detailed description of the response issued by the Context Manager Actor. IHE specifies no restrictions or extensions to the CCOW definition of the StartContextChanges method.

### 3.6.4.2 Change Context – SetItemValues Method

#### 3.6.4.2.1 Trigger Events

The SetItemValues method is triggered by the return of a context coupon in response to the StartContextChanges method.

#### 860 3.6.4.2.2 Message Semantics

##### 3.6.4.2.2.1 Patient Context Participant Actor support for CCOW Patient Subject

865 The Patient Context Participant Actor issues an invocation of the SetItemValues method of the ContextData interface to the Context Manager Actor. Refer to the *HL7 Context Management “CCOW” Standard: Technology and Subject-Independent Architecture* document, Section 17.3.4.4, for a more detailed description of the parameters associated with this method, to be issued by the Patient Context Participant Actor. The Patient Context Participant Actor supports synchronization around the CCOW patient subject. A Patient Context Participant Actor performing a Change Context Transaction shall set the Patient.Id.IdList.1 patient identifier item. All other patient identifier items as defined by the CCOW standard and shown in Table 3.6.4.2-1 Patient Subject Identifier Items, are subject to deprecation in future releases of the standard.

870

**Table 3.6.4.2-1: Patient Subject Identifier Items**

Patient Subject Identifier Item Name	HL7 Meaning	HL7 Data Type	HL7 Semantic Constraints on Values	Case Sensitive
Patient.Id.MRN.Suffix	Patient’s medical record number, per PID-2	ST	HL7 Table 0203Identifier Type = MR	No
Patient.Id.MPI	Patient’s identifier in the “Master Patient Index”, per PID-2	ST	HL7 Table 0203Identifier Type = PT or PI (as agreed upon by context sharing systems) and Assigning Authority represents the MPI system	No
Patient.Id.NationalIdentifier	Patient’s national identifier number, per PID-2	ST	HL7 Table 0203Identifier Type = PT and Assigning Authority represents agreed-upon National Authority	No
Patient.Id.IdList	A list of patient identifiers for a patient, per PID-3	CX	May be a repeating set of CX item values each of which contains an identifier that denotes the same patient	No

Adapted from the HL7 Context Management “CCOW” Standard, version 1.4

875 The Patient.Id.IdList.1 item shall populate component 1, (the patient identifier), and either sub-component 1, (namespace ID), of component 4, (the assigning authority), of the CX data item. This is to be consistent with the requirements for the patient identifier as defined in the PIX Query transaction documented in Section 3.9.4.1.2.2.

880 The Patient Context Participant Actor should use the SetItemValues associated with the ContextData interface, as defined in Sections 17.3.4.4 and 17.3.4.5 respectively of the *HL7 Context Management “CCOW” Standard: Technology and Subject-Independent Architecture* document.

#### **3.6.4.2.2 Client Authentication Agent Actor support for CCOW User Subject**

885 The Client Authentication Agent Actor supports synchronization around the CCOW user subject. A Client Authentication Agent Actor performing a Change Context Transaction shall set the User.Id.Logon.Suffix identifier item, where the Suffix is assigned as Kerberos. This would make the item name to be used by the Client Authentication Agent Actor User.Id.Logon.Kerberos. The value of User.Id.Kerberos shall be the username@realm.

890 The Client Authentication Agent Actor shall use the SetItemValues associated with SecureContextData interface as defined in Section 17.3.13.3 of the *HL7 Context Management “CCOW” Standard: Technology and Subject-Independent Architecture* document.

#### **3.6.4.2.3 Expected Actions**

895 The Context Manager Actor returns an acknowledgement of the changed data. IHE specifies no restrictions or extensions to the CCOW definition of the SetItemValues method. Refer to the *HL7 Context Management “CCOW” Standard: Technology and Subject-Independent Architecture* document, Section 17.3.4.4, for a more detailed description of the response issued by the Context Manager Actor to the Patient Context Participant Actor. Refer to the *HL7 Context Management “CCOW” Standard: Technology and Subject-Independent Architecture* document, Section 17.3.13.3, for a more detailed description of the response issued by the Context Manager Actor to the Client Authentication Agent Actor.

900

#### **3.6.4.3 Context Change – EndContextChanges**

##### **3.6.4.3.1 Trigger Events**

The EndContextChanges method is triggered by the completion of the SetItemValues method.

##### **3.6.4.3.2 Message Semantics**

905 The Patient Context Participant and Client Authentication Agent Actors issue an EndContextChanges method of the ContextManager interface to the Context Manager Actor. Refer to the *HL7 Context Management “CCOW” Standard: Technology and Subject-Independent Architecture* document, Section 17.3.6.6, for a description of the parameters associated with this method. IHE specifies no restrictions or extensions to the CCOW definition of the EndContextChanges method.

910

##### **3.6.4.3.3 Expected Actions**

The EndContextChanges method triggers the ContextChangesPending method as defined in Section 3.13.4.1. The Context Manager Actor returns the results of the context survey to the instigating Patient Context Participant or Client Authentication Agent Actor.

915 If the instigating Patient Context Participant or Client Authentication Agent Actor receives a unanimous acceptance in the survey results, then it triggers an accept in the PublishChangesDecision method.

If the instigating Patient Context Participant or Client Authentication Agent Actor receives one or more Conditional Accept responses in the survey results, then the application containing the  
920 Actor must ask the user to continue, suspend context participation, or cancel the pending context change transaction. The user's decision to continue will result in the context change being accepted. The user's decision to suspend context participation will cancel the change transaction and allow the user to temporarily use the application without affecting the current context session. The user's decision to cancel will cancel the pending context change transaction. At this  
925 point the Patient Context Participant or Client Authentication Agent Actor triggers the PublishChangesDecision with the user's response.

In the event a participant application does not respond to the survey, after a configurable period of time the Context Manager Actor will deem the application as "busy". If the instigating participant application receives one or more busy responses, it shall only present the suspend or  
930 cancel choices. This prevents an application from inadvertently becoming out of synch with the context, unbeknownst to the user.

Refer to the *HL7 Context Management "CCOW" Standard: Technology and Subject-Independent Architecture* document, Section 17.3.6.6, for a more detailed description of the response issued by the Context Manager Actor and actions required by the Patient Context  
935 Participant and or Client Authentication Agent Actors. IHE specifies no restrictions or extensions to the CCOW definition of the EndContextChanges method.

### **3.6.4.4 Context Change – PublishChangesDecision**

#### **3.6.4.4.1 Trigger Events**

The PublishChangesDecision method is triggered by the return of EndContextChanges method.

#### **940 3.6.4.4.2 Message Semantics**

The Patient Context Participant and Client Authentication Agent Actors shall issue either an accept or cancel via the PublishChangesDecision method of the ContextManager interface to the Context Manager Actor. Refer to the *HL7 Context Management "CCOW" Standard: Technology and Subject-Independent Architecture* document, Section 17.3.6.8, for a more detailed  
945 description of the parameters associated with this method. IHE specifies no restrictions or extensions to the CCOW definition of the PublishChangesDecision method.

#### **3.6.4.4.3 Expected Actions**

When the PublishChangesDecision method is received by the Context Manager Actor it triggers the ContextChangesAccepted or ContextChangesCancelled method as defined in Section  
950 3.13.4.2 or Section 3.13.4.3 respectively. IHE specifies no restrictions or extensions to the CCOW definition of the PublishChangesDecision method. Refer to the *HL7 Context Management "CCOW" Standard: Technology and Subject-Independent Architecture* document, Section 17.3.6.8, for a description of the response issued by the Context Manager Actor.

### 3.7 Leave Context [ITI-7]

955 This section corresponds to Transaction ITI-7 of the IHE IT Infrastructure Technical Framework. Transaction ITI-7 is used by the Patient Context Participant, User Context Participant, Client Authentication Agent, and Context Manager Actors.


#### 3.7.1 Scope

960 This transaction allows for an application supporting the Patient Context Participant, User Context Participant, or Client Authentication Agent Actor to terminate participation in a context management session in which it is participating.

965 A Context Participant Actor notifies the Context Manager Actor that is leaving the common context. The semantics of the methods used are defined in the documents *HL7 Context Management “CCOW” Standard: Component Technology Mapping: ActiveX* or *HL7 Context Management “CCOW” Standard: Component Technology Mapping: Web*. The Context Participant Actor can choose the technology implementation it wishes to implement. The Context Manager Actor must support both technology implementations in order to accommodate whichever implementation a joining participant ends up choosing.

#### 3.7.2 Use Case Roles

970

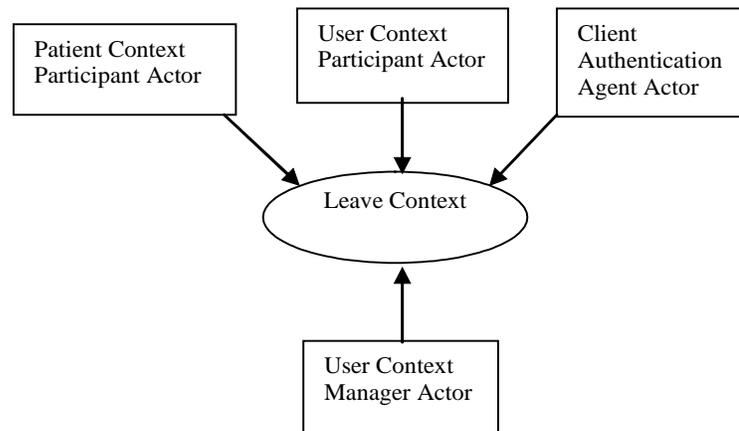

**Actor:** Patient Context Participant

975 **Role:** Initiates notification to the Context Manager that it will no longer be participating in the context management session.

**Actor:** User Context Participant

**Role:** Initiates notification to the Context Manager that it will no longer be participating in the context management session.

**Actor:** Client Authentication Agent

980 **Role:** Initiates notification to the Context Manager that it will no longer be participating in the context management session.

**Actor:** Context Manager

**Role:** Responds to the request to leave the context session from the context participant.

### 3.7.3 Referenced Standard


985 HL7 Context Management “CCOW” Standard, Version 1.4:

Technology and Subject Independent Architecture

Component Technology Mapping: ActiveX

Component Technology Mapping: Web

### 3.7.4 Interaction Diagram

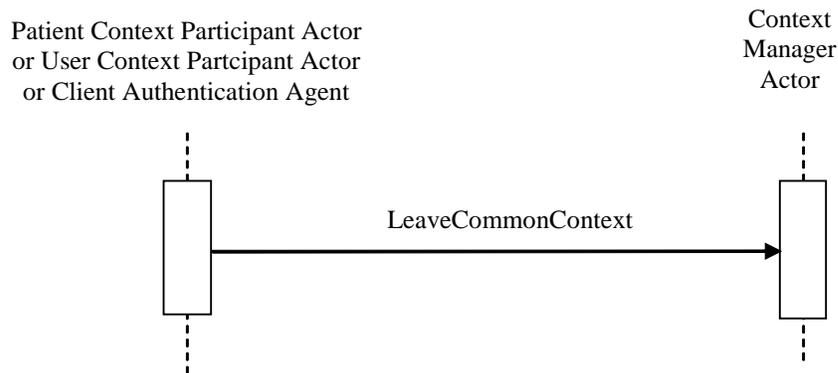

990

**Figure 3.7-1: Leave Context Sequence**

#### 3.7.4.1 Leave Context – LeaveCommonContext Method

##### 3.7.4.1.1 Trigger Events

995 This transaction is triggered by the user closing an application that contains a Patient Context Participant Actor, a User Context Participant Actor, or Client Authentication Agent Actor.

##### 3.7.4.1.2 Message Semantics

1000 LeaveContext is defined as a method on the ContextManager interface. It shall be invoked by a Context Participant Actor to announce its departure from the secure context session. A Context Participant Actor shall provide parameters for this method as specified in the CCOW Standard.

Refer to the *HL7 Context Management “CCOW” Standard: Technology and Subject-Independent Architecture* document, Section 17.3.6.4, for a description of the parameters associated with this method.

### 3.7.4.1.3 Expected Actions

1005 The Context Manager Actor acknowledges the receipt of the notification. Refer to the *HL7 Context Management “CCOW” Standard: Technology and Subject-Independent Architecture* document, Section 17.3.6.4, for a description of the response issued by the Context Manager Actor.

1010 The context participant is expected to dispose of all context manager interface references upon receipt of the message reply. No further context change transactions will be processed by the Context Manager for this context participant.


## 3.8 Patient Identity Feed [ITI-8]

This section corresponds to Transaction ITI-8 of the IHE IT Infrastructure Technical Framework. Transaction ITI-8 is used by the Patient Identity Source, Patient Identifier Cross-reference  
1015 Manager and Document Registry Actors.

### 3.8.1 Scope

This transaction communicates patient information, including corroborating demographic data, after a patient’s identity is established, modified or merged or after the key corroborating demographic data has been modified.

### 1020 3.8.2 Use Case Roles

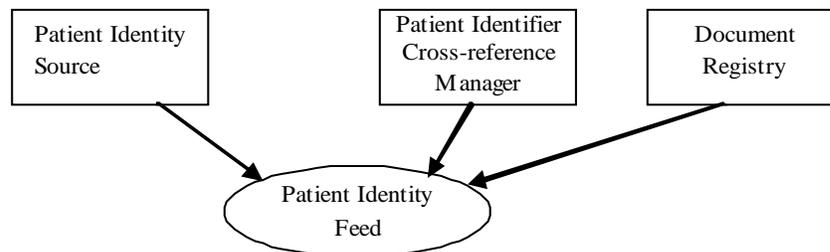

**Actor:** Patient Identity Source

1025 **Role:** Provides notification to the Patient Identifier Cross-reference Manager and Document Registry for any patient identification related events including: creation, updates, merges, etc.

**Actor:** Patient Identifier Cross-reference Manager

**Role:** Serves a well-defined set of Patient Identification Domains. Based on information provided in each Patient Identification Domain by a Patient Identification Source Actor, it manages the cross-referencing of patient identifiers across Patient Identification Domains.

1030 **Actor:** Document Registry

**Role:** Uses patient identifiers provided by Patient Identity Source to ensure that XDS Documents metadata registered is associated with a known patient and updates patient identity in document metadata by tracking identity change operations (e.g., merge).


### 3.8.3 Referenced Standards

1035 HL7 Version 2.3.1 Chapter 2 – Control, Chapter 3 – Patient Administration

HL7 Version 2.3.1 was selected for this transaction for the following reasons:

- It provides a broader potential base of Patient Identity Source Actors capable of participating in the profiles associated with this transaction.
  - It allows existing ADT Actors from within IHE Radiology to participate as Patient Identity Source Actors.
- 1040

### 3.8.4 Interaction Diagram

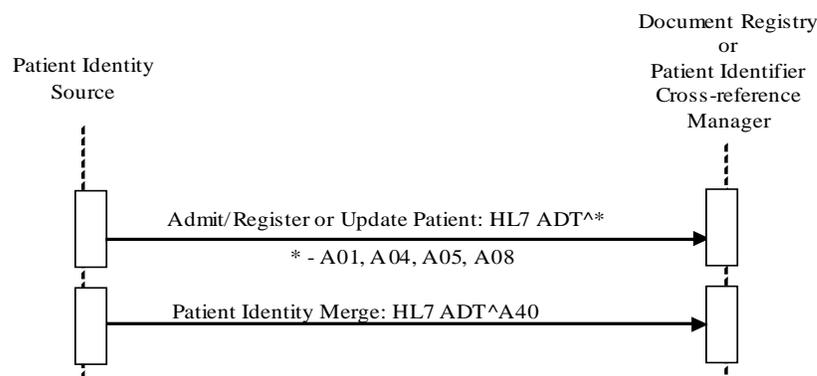

**Figure 3.8-1: Patient Identity Sequence**

#### 1045 3.8.4.1 Patient Identity Management – Admit/Register or Update Patient

##### 3.8.4.1.1 Trigger Events

The following events from a Patient Identity Source Actor will trigger one of the Admit/Register or Update messages:

- A01 – Admission of an in-patient into a facility
  - A04 – Registration of an outpatient for a visit of the facility
  - A05 – Pre-admission of an in-patient (i.e., registration of patient information ahead of actual admission).
- 1050

Changes to patient demographics (e.g., change in patient name, patient address, etc.) shall trigger the following Admit/Register or Update message:

- A08 – Update Patient Information
- 1055

The Patient Identifier Cross-reference Manager shall only perform cross-referencing logic on messages received from Patient Identity Source Actors. For a given Patient Identifier Domain there shall be one and only one Patient Identity Source Actor, but a given Patient Identity Source Actor may serve more than one Patient Identifier Domain.

1060 **3.8.4.1.2 Message Semantics**

1065 The Patient Identity Feed transaction is conducted by the HL7 ADT message, as defined in the subsequent sections. The Patient Identity Source Actor shall generate the message whenever a patient is admitted, pre-admitted, or registered, or when some piece of patient demographic data changes. Pre-admission of inpatients shall use the A05 trigger event. The segments of the message listed below are required, and their detailed descriptions are provided in the following subsections.

Note: Conventions used in this section as well as additional qualifications to the level of specification and HL7 profiling are stated in ITI TF-2x: Appendix C and C.1.

1070 Required segments are defined below. Other segments are optional

**Table 3.8-1: ADT Patient Administration Messages**

ADT	Patient Administration Message	Chapter in HL7 2.3.1
MSH	Message Header	2
EVN	Event Type	3
PID	Patient Identification	3
PV1	Patient Visit	3

1075 Each message shall be acknowledged by the HL7 ACK message sent by the receiver of ADT message to its sender. See ITI TF-2x: C.2.3, “Acknowledgement Modes”, for definition and discussion of the ACK message.

1080 This transaction does not require Patient Identity Source Actors to include any attributes not already required by the corresponding HL7 message (as is described in the following sections). This minimal set of requirements enables inclusion of the largest range of Patient Identity Source Actor systems.

This transaction **does** place additional requirements on the Patient Identifier Cross-reference Manager and Document Registry Actors, requiring them to accept a set of HL7 attributes beyond what is required by HL7. (See Section 3.8.4.1.3 for a description of these additional requirements).

1085 **3.8.4.1.2.1 MSH Segment**

The MSH segment shall be constructed as defined in ITI TF-2x: C.2.2 “Message Control”.

1090 Field *MSH-9 Message Type* shall have at least two components. The first component shall have a value of **ADT**; the second component shall have one of the values of **A01**, **A04**, **A05** or **A08** as appropriate. The third component is optional; however, if present, it shall have the value of **ADT\_A01** for all message types, as defined in HL7 v2.3.1 Table 0354.

**3.8.4.1.2.EVN Segment**

The Patient Identity Source Actor is not required to send any attributes within the EVN segment beyond what is specified in the HL7 standard. See Table C.1-4 in ITI TF-2x: C.2.4 “Common Segment Definitions” for the specification of this segment.

1095 **3.8.4.1.2.PID Segment**

The Patient Identity Source Actor is not required to send any attributes within the PID segment beyond what is specified in the HL7 standard.

When sending ADT messages A01, A04, and A05, the Patient Identity Source Actor shall populate appropriate values in the fields as listed in Table 3.8-2:

1100

**Table 3.8-2: IHE Profile - PID segment**

SEQ	LEN	DT	OPT	TBL#	ITEM #	ELEMENT NAME
1	4	SI	O		00104	Set ID - Patient ID
2	20	CX	O		00105	Patient ID
3	250	CX	R		00106	Patient Identifier List
4	20	CX	O		00107	Alternate Patient ID
5	250	XPN	R		00108	Patient Name
6	250	XPN	R2		00109	Mother's Maiden Name
7	26	TS	R2		00110	Date/Time of Birth
8	1	IS	R2	0001	00111	Administrative Sex
9	250	XPN	O		00112	Patient Alias
10	250	CE	O	0005	00113	Race
11	250	XAD	R2		00114	Patient Address
12	4	IS	O	0289	00115	County Code
13	250	XTN	R2		00116	Phone Number - Home
14	250	XTN	R2		00117	Phone Number - Business
15	250	CE	O	0296	00118	Primary Language
16	250	CE	O	0002	00119	Marital Status
17	250	CE	O	0006	00120	Religion
18	250	CX	O		00121	Patient Account Number
19	16	ST	R2		00122	SSN Number – Patient
20	25	DLN	R2		00123	Driver's License Number - Patient
21	250	CX	O		00124	Mother's Identifier
22	250	CE	O	0189	00125	Ethnic Group
23	250	ST	O		00126	Birth Place
24	1	ID	O	0136	00127	Multiple Birth Indicator
25	2	NM	O		00128	Birth Order
26	250	CE	O	0171	00129	Citizenship
27	250	CE	O	0172	00130	Veterans Military Status

SEQ	LEN	DT	OPT	TBL#	ITEM #	ELEMENT NAME
28	250	CE	O	0212	00739	Nationality
29	26	TS	O		00740	Patient Death Date and Time
30	1	ID	O	0136	00741	Patient Death Indicator

Adapted from the HL7 standard, Version 2.3.1

Note1: It is likely that not all attributes marked as R2 above will be sent in some environments.

1105 Note2: The field length of many attributes in this table exceeds the requirements stated in HL7 2.3.1. The Patient Identifier Cross-reference Manager (receiver) is required to support these extended lengths to cope with the information it needs to complete identifier cross-referencing logic. The Patient Identity Source may or may not send values of the full length listed in this table.

This message shall use the field PID-3 Patient Identifier List to convey the Patient ID uniquely identifying the patient within a given Patient Identification Domain.

1110 The Patient Identity Source Actor shall provide the patient identifier in the ID component (first component) of the PID-3 field (PID-3.1). The Patient Identity Source Actor shall use component PID-3.4 to convey the assigning authority (Patient Identification Domain) of the patient identifier. Either the first subcomponent (namespace ID) or the second and third subcomponents (universal ID and universal ID type) shall be populated. If all three subcomponents are

1115 populated, the first subcomponent shall reference the same entity as is referenced by the second and third components.

#### 3.8.4.1.2.4PV1 Segment

The Admit/ Register or Update Patient message is not required to include any attributes within the PV1 segment beyond what is specified in the HL7 standard.

#### 1120 3.8.4.1.3 Expected Actions – Patient Identifier Cross-reference Manager

The Patient Identifier Cross-reference Manager shall be capable of accepting attributes in the PID segment as specified in HL7 standard as well as their extended field length as defined in Table 3.8-2. This is to ensure that the Patient Identifier Cross-reference Manager can handle a sufficient set of corroborating information in order to perform its cross-referencing function.

1125 If the PID-3.4 (assigning authority) component is not included in the message (as described in Section 3.8.4.1.2.3) the Patient Identifier Cross-reference Manager shall fill PID-3.4 prior to storing the ID information and performing its cross-referencing activities. The information filled by the Patient Identifier Cross-reference Manager is based on the configuration associating each of the Patient Identity Source Actors with the subcomponents of the correct assigning authority

1130 (namespace ID, UID and UID type). (See Section 3.8.4.1.3.1 below for a list of required Patient Identifier Cross-reference Manager configuration parameters).

A single Patient Identity Source Actor can serve multiple Patient Identification domains. The Patient Identifier Cross-reference Manager Actor shall only recognize (by configuration) a single Patient Identity Source Actor per domain. (See Section 3.8.4.1.3.1 below for a list of required Patient Identifier Cross-reference Manager configuration parameters).

1135

The cross-referencing process (algorithm, human decisions, etc.) is performed within the Patient Identifier Cross-reference Manager Actor, but its specification is beyond the scope of IHE.

1140 Once the Patient Identifier Cross-reference Manager has completed its cross-referencing function, it shall make the newly cross-referenced identifiers available to PIX queries and send out notification to any Patient Identifier Cross-reference Consumers that have been configured (as being interested in receiving such notifications) using the PIX Update Notification transaction (see Section 3.10 for the details of that transaction).

**3.8.4.1.3.1 Required Patient Identifier Cross-reference Manager Configuration**

1145 The following items are expected to be parameters that are configurable on the Patient Identifier Cross-reference Manager Actor. For each Patient Identification Domain included in the Identification Cross-reference Domain managed by a Patient Identifier Cross-reference Manager Actor, the following configuration information is needed:

- 1150 • Identifier of the Domain. This identifier shall specify all 3 components of the HL7 assigning authority (including the namespace ID and/or both the universal ID and universal ID type subcomponents) of the PID-3 field for the identification of the domain.
- 1155 • Patient Identity Source Actor for the domain. This is expected to be the MSH-3 Sending Application and the corresponding MSH-4 Sending Facility fields in the HL7 ADT message. (Alternative identification schemes might include IP address of the Patient Identity Source Actor or Node Authentication if the Audit Trail and Node Authentication Integration Profile is used.)

**3.8.4.1.4 Expected Actions – Document Registry**

1160 The Document Registry shall be capable of accepting attributes in the PID segment as specified in Table 3.8-2a. The Patient Identity Feed transaction contains more triggers and data than what the XDS Document Registry needs for its operation. In particular, A08 – Update Patient Information, if received shall be ignored.

**Table 3.8-2a: IHE Profile - PID segment**

SEQ	LEN	DT	OPT	TBL#	ITEM #	ELEMENT NAME
3	250	CX	R		00106	Patient Identifier List

Adapted from the HL7 standard, Version 2.3.1

1165 Note: This table reflects only the attributes required to be handled by the Document Registry (receiver). Other attributes of the PID Segment may be ignored.

1170 If subcomponents 2 and 3 (the universal ID and the universal ID Type of Assigning Authority) of the Patient Identification Domain of the XDS Affinity Domain in PID-3.4 are not filled in the message (as described in Section 3.8.4.1.2.3) the Document Registry shall fill subcomponents 2 and 3 of the Patient Identification Domain of the XDS Affinity Domain prior to storing the patient identity in the registry. The assigning authority information filled by the Document

Registry is based on its configuration of the Patient Identification Domain of the XDS Affinity Domain (See Section 3.8.4.1.4.1 below for a list of required Document Registry configuration parameters).

1175 The Document Registry shall store only the patient identifiers of the patient identification domain designated by the XDS Affinity Domain for document sharing in the registry. Patient identifiers of other patient identification domains (assigning authorities), if present in a received message, shall be ignored.

**3.8.4.1.4.1 Required Document Registry Configuration**

1180 The following items are expected to be parameters that are configurable on the Document Registry Actor:

- Identifier of the Patient Identification Domain of the XDS Affinity Domain. This identifier shall be specified with 3 components of the HL7 assigning authority (data type HD): namespaceID, universal ID and universal ID type. The universal ID shall be an ISO OID (Object Identifier), and therefore the universal ID Type must be “ISO”.

1185

**3.8.4.2 Patient Identity Management –Patient Identity Merge (Merge Patient ID)**

**3.8.4.2.1 Trigger Events**

When two patients’ records are found to identify the same patient by a Patient Identity Source Actor in a Patient Identifier Domain and are merged, the Patient Identity Source shall trigger the following message:

1190

- A40 – Merge Patient – Internal ID

An A40 message indicates that the Patient Identity Source Actor has done a merge within a specific Patient Identification Domain. That is, MRG-1 (patient ID) has been merged into PID-3 (Patient ID).

1195 **3.8.4.2.2 Message Semantics**

The Patient Identity Feed transaction is an HL7 ADT message. The message shall be generated by the system (Patient Identity Source Actor) that performs the update whenever two patient records are found to reference the same person.

1200

**Note:** Conventions used in this section as well as additional qualifications to the level of specification and HL7 profiling are stated in ITI TF-2x: Appendix C and C.1.

The segments of the HL7 Merge Patient message listed below are required, and the detailed description of the message is provided in Section 3.8.4.2.2.1–3.8.4.2.2.6. The PV1 segment is optional.

1205

**Table 3.8-3: ADT A40 Patient Administration Message**

ADT A40	Patient Administration Message	Chapter in HL7 v2.3.1
MSH	Message Header	2

EVN	Event Type	3
PID	Patient Identification	3
MRG	Merge Information	3
[PV1]	Patient Visit	3

Each message shall be acknowledged by the HL7 ACK message sent by the receiver of ADT message to its sender. See ITI TF-2x: C.2.3 “Acknowledgement Modes” for definition and discussion of the ACK message.

- 1210 A separate merge message shall be sent for each pair of patient records to be merged. For example, if Patients A, B, and C are all to be merged into Patient B, two ADT^A40 messages would be sent. In the first ADT^A40 message, patient B would be identified in the PID segment and Patient A would be identified in the MRG segment. In the second ADT^A40 message, patient B would be identified in the PID segment, and Patient C would be identified in the MRG segment.
- 1215

Modification of any patient demographic information shall be done by sending a separate Update Patient Information (A08) message for the current Patient ID. An A40 message is the only method that may be used to update a Patient ID.

#### 3.8.4.2.2.1 MSH Segment

- 1220 MSH segment shall be constructed as defined in ITI TF-2x: C.2.2 “Message Control”.  
Field *MSH-9 Message Type* shall have at least two components. The first component shall have a value of **ADT**; the second component shall have value of **A40**. The third component is optional; however, if present, it shall have a value of **ADT\_A39**.

#### 3.8.4.2.2.2 EVN Segment

- 1225 See ITI TF-2x: C.2.4 for the list of all required and optional fields within the EVN segment.

#### 3.8.4.2.2.3 PID Segment

The PID segment shall be constructed as defined in Section 3.8.4.1.2.3.

#### 3.8.4.2.2.4 MRG Segment

The MRG segment shall be constructed as defined in Table 3.8-4:

1230

**Table 3.8-4: IHE Profile - MRG segment**

SEQ	LEN	DT	OPT	TBL#	ITEM #	ELEMENT NAME
1	250	CX	R		00211	Prior Patient Identifier List
2	250	CX	O		00212	Prior Alternate Patient ID
3	250	CX	O		00213	Prior Patient Account Number
4	250	CX	R2		00214	Prior Patient ID
5	250	CX	O		01279	Prior Visit Number
6	250	CX	O		01280	Prior Alternate Visit ID
7	250	XPN	R2		01281	Prior Patient Name

Adapted from the HL7 Standard, Version 2.3.1

1235

The PID and PV1 segments contain the dominant patient information, including patient identifier and the issuing assigning authority. The MRG segment identifies the “old” or secondary patient records to be de-referenced. HL7 does not require that the “old” record be deleted; it does require that the “old” identifier shall not be referenced in future transactions following the merge.

1240

The Patient Identity Source Actor shall send the “old” patient identifier (to be merged) in MRG-1, with the identifier value in the component MRG-1.1 and the assigning authority in the component MRG-1.4. The Patient Identity Source Actor shall populate the same value of the assigning authority in PID-3.4, in the component MRG-1.4.

### 3.8.4.2.2.5 PV1 Segment

PV1 segment shall be constructed as defined in Section 3.8.4.1.2.4.

### 3.8.4.2.3 Expected Actions

1245

The Patient Identifier Cross-reference Manager shall be capable of accepting attributes in the MRG segment as specified in Table 3.8-4.

In addition, the Patient Identifier Cross-reference Manager shall perform the Expected Actions as specified in Section 3.8.4.1.3.

1250

When the Patient Identifier Cross-reference Manager receives the ADT^A40 message type of the Patient Identity Feed transaction, it shall cross-reference the patient identifiers provided in the PID-3 and MRG-1 fields of the message by replacing any references it is maintaining internally to the patient ID provided in the MRG-1 field by the patient ID included in the PID-3 field. After the identifier references are replaced, the Patient Identifier Cross-reference Manager shall reapply its internal cross-referencing logic/ policies before providing the updated information via either the PIX Query or PIX Notification Transactions.

1255

### 3.8.4.2.4 Expected Actions – Document Registry

The Document Registry shall be capable of accepting attributes in the MRG segment as specified in Table 3.8-4. Other attributes may exist, but the Document Registry shall ignore them.

In addition, the Document Registry shall perform the Expected Actions as specified in Section 3.8.4.1.4.

- 1260 When the Document Registry receives the ADT^A40 message type of the Patient Identity Feed transaction, it shall merge the patient identity specified in MRG-1 (secondary patient identity) into the patient identity specified in PID-3 (primary patient identity) in its registry. After the merge, all Document Submission Sets (including all Documents and Folders beneath them) under the secondary patient identity before the merge shall point to the primary patient identity.
- 1265 The secondary patient identity shall no longer be referenced in the future services provided by the Document Registry.

Changes resulting from an A40 Merge message are not reversible. No UnMerge message is supported by this transaction.

- 1270 See Section 3.18.4.1.2.3.9 for details of how this message type affects results of a Registry Stored Query [ITI-18] transaction and the end of ITI TF-2b: 3.42.4.1.3.3.2 to see how it affects the Register Document Set-b [ITI-42] transaction.

An A40 merge message contains two fields of interest:

- MRG-1 – subsumed patient identifier: the patient identifier whose use is being ended
- PID-3 – surviving patient identifier: the patient identifier whose use continues.

- 1275 After a merge, the patient identifier PID-3 represents all records formerly represented by either MRG-1 or PID-3. All other fields may be ignored.

The following conditions shall be detected by the Document Registry. Messages containing these conditions shall not update the state of the Document Registry.

- 1280
- The subsumed patient identifier is not issued by the correct Assigning Authority according to the Affinity Domain configuration.
  - The surviving patient identifier is not issued by the correct Assigning Authority according to the Affinity Domain configuration.
  - The subsumed and surviving patient identifiers are the same.
  - The subsumed patient identifier has already been subsumed by an earlier message.
- 1285
- The surviving patient identifier has already been subsumed by an earlier message.
  - Both the subsumed and surviving patient identifier must convey a currently active patient identifier known to the Registry Actor.

If none of the above conditions occur then the Document Registry Actor shall perform the following duties:

- 1290
- Records the merge. Only the subsumed and surviving patient identifiers need be remembered. A patient identifier merge affects the processing of future Register Document Set-b [ITI-42] transactions. See ITI TF-3: 4.3.1.2.4 XDS Registry Enforcement of Attributes and ITI TF-3: 4.3.1.2.5 XDS Registry Responsibilities for more details.

- 1295
- Multiple merge transactions can form a recorded merge chain, where the Subsumed identifier of the current merge is the Surviving identifier of a previous merge.
  - Register Document Set-b transactions referencing a subsumed identifier are rejected with an XdsUnknownPatientId error.
  - Registry Stored Query transactions referencing a subsumed identifier return no content.
- 1300
- Registry Stored Query transactions referencing a surviving identifier successfully match the entire recorded merge chain and return appropriate metadata.

Note: This transaction does not specify how the merge is to be implemented. It may or may not change the stored form of the metadata. It only specifies the observable results from the perspective of the Registry Stored Query transaction [ITI-18] and the Register Document Set-b transaction [ITI-42].

1305 **3.8.5 Security Considerations**

**3.8.5.1 Audit Record Considerations – Admit/Register or Update Patient**

The Patient Admit/Register transactions (A01, A04, A05) and Update Patient Information (A08) transaction are to be audited as “Patient Record” events, as defined in Table 3.20.4.1.1.1-1. The following tables show items that are required to be part of the audit record for these specific PIX transactions.

1310

**3.8.5.1.1 Patient Identity Source Actor audit message:**

	Field Name	Opt	Value Constraints
<b>Event</b> AuditMessage/ EventIdentification	EventID	M	EV(110110, DCM, “Patient Record”)
	EventActionCode	M	“C” (create) for A01, A04, A05 “U” (update) for A08
	EventDateTime	M	not specialized
	EventOutcomeIndicator	M	not specialized
	EventTypeCode	M	EV(“ITI-8”, “IHE Transactions”, “Patient Identity Feed”)
Source (Patient Identity Source Actor) (1)			
Human Requestor (0..n)			
Destination (Patient Identifier Cross-reference Manager or Document Registry) (1)			
Audit Source (Patient Identity Source Actor) (1)			
Patient (1)			

Where:

	Field Name	Opt	Description
<b>Source</b> AuditMessage/ ActiveParticipant	UserID	M	The identity of the Patient Identity Source Actor facility and sending application from the HL7 message; concatenated together, separated by the   character.
	AlternativeUserID	M	The process ID as used within the local operating system in the local system logs.
	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	M	EV(110153, DCM, “Source”)
	NetworkAccessPointTypeCode	M	“1” for machine (DNS) name, “2” for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Human Requestor (if known)</b> <i>AuditMessage/ActiveParticipant</i>	UserID	M	Identity of the human that initiated the transaction.
	<i>AlternativeUserID</i>	U	<i>not specialized</i>
	<i>UserName</i>	U	<i>not specialized</i>
	<i>UserIsRequestor</i>	U	<i>not specialized</i>
	RoleIDCode	U	Access Control role(s) the user holds that allows this transaction.
	NetworkAccessPointTypeCode	U	<i>not specialized</i>
	NetworkAccessPointID	U	<i>not specialized</i>

<b>Destination</b> <i>AuditMessage/ActiveParticipant</i>	UserID	M	The identity of the Patient Identifier Cross-reference Manager or Document Registry facility and receiving application from the HL7 message; concatenated together, separated by the   character.
	<i>AlternativeUserID</i>	M	<i>not specialized</i>
	<i>UserName</i>	U	<i>not specialized</i>
	<i>UserIsRequestor</i>	U	<i>not specialized</i>
	RoleIDCode	M	EV(110152, DCM, "Destination")
	NetworkAccessPointTypeCode	M	"1" for machine (DNS) name, "2" for IP address
	NetworkAccessPointID	M	The machine name or IP address.

1315

<b>Audit Source</b> <i>AuditMessage/AuditSourceIdentification</i>	<i>AuditSourceID</i>	U	<i>not specialized</i>
	<i>AuditEnterpriseSiteID</i>	U	<i>not specialized</i>
	<i>AuditSourceTypeCode</i>	U	<i>not specialized</i>

<b>Patient</b> <i>(AuditMessage/ParticipantObjectIdentification)</i>	ParticipantObjectTypeCode	M	"1" (person)
	ParticipantObjectTypeCodeRole	M	"1" (patient)
	<i>ParticipantObjectDataLifeCycle</i>	U	<i>not specialized</i>
	<i>ParticipantObjectIDTypeCode</i>	M	<i>not specialized</i>
	<i>ParticipantObjectSensitivity</i>	U	<i>not specialized</i>
	ParticipantObjectID	M	the patient ID in HL7 CX format.
	<i>ParticipantObjectName</i>	U	<i>not specialized</i>
	<i>ParticipantObjectQuery</i>	U	<i>not specialized</i>
	ParticipantObjectDetail	M	Type=MSH-10 (the literal string), Value=the value of MSH-10 (from the message content, base64 encoded)

1320

### 3.8.5.1.2 Patient Identifier Cross-reference Manager or Document Registry Actor audit message:

	Field Name	Opt	Value Constraints
<b>Event</b>	EventID	M	EV(110110, DCM, "Patient Record")

	EventActionCode	M	“C” (create) for A01, A04, A05 “U” (update) for A08
	EventDateTime	M	not specialized
	EventOutcomeIndicator	M	not specialized
	EventTypeCode	M	EV(“ITI-8”, “IHE Transactions”, “Patient Identity Feed”)
Source (Patient Identity Source Actor) (1)			
Destination (Patient Identifier Cross-reference Manager or Document Registry) (1)			
Audit Source (Patient Identifier Cross-reference Manager or Document Registry) (1)			
Patient(1)			

Where:

<b>Source</b> AuditMessage/ ActiveParticipant	UserID	M	The identity of the Patient Identity Source Actor facility and sending application from the HL7 message; concatenated together, separated by the   character.
	AlternativeUserID	U	not specialized
	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	M	EV(110153, DCM, “Source”)
	NetworkAccessPointTypeCode	M	“1” for machine (DNS) name, “2” for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Destination</b> AuditMessage/ ActiveParticipant	UserID	M	The identity of the Patient Identifier Cross-reference Manager or Document Registry facility and receiving application from the HL7 message; concatenated together, separated by the   character.
	AlternativeUserID	M	The process ID as used within the local operating system in the local system logs.
	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	M	EV(110152, DCM, “Destination”)
	NetworkAccessPointTypeCode	M	“1” for machine (DNS) name, “2” for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Audit Source</b> AuditMessage/ AuditSourceIdentification	AuditSourceID	U	not specialized
	AuditEnterpriseSiteID	U	not specialized
	AuditSourceTypeCode	U	not specialized

1325

<b>Patient</b>	ParticipantObjectTypeCode	M	“1” (person)
----------------	---------------------------	---	--------------

	ParticipantObjectTypeCodeRole	M	“1” (patient)
	ParticipantObjectDataLifeCycle	U	not specialized
	ParticipantObjectIDTypeCode	M	not specialized
	ParticipantObjectSensitivity	U	not specialized
	ParticipantObjectID	M	the patient ID in HL7 CX format.
	ParticipantObjectName	U	not specialized
	ParticipantObjectQuery	U	not specialized
	ParticipantObjectDetail	M	Type=MSH-10 (the literal string), Value=the value of MSH-10 (from the message content, base64 encoded)

### 3.8.5.2 Audit Record Considerations – Patient Identity Merge (Merge Patient ID)

The Patient Identity Merge transaction (A40) is to be audited as a “Patient Record” event, as defined in Table 3.20.4.1.1.1-1. The following tables show items that are required to be part of the audit record for the Patient Identity Merge transaction. Logically, a merge operation consists of a delete on one patient record, and an update of another patient record. Separate audit records shall be written for the delete operation and the update operation.

1330

#### 3.8.5.2.1 Patient Identity Source Actor audit message:

	Field Name	Opt	Value Constraints
<b>Event</b> AuditMessage/ EventIdentification	EventID	M	EV(110110, DCM, “Patient Record”)
	EventActionCode	M	“D” (delete) for the Delete operation “U” (update) for the Update operation
	EventDateTime	M	not specialized
	EventOutcomeIndicator	M	not specialized
	EventTypeCode	M	EV(“ITI-8”, “IHE Transactions”, “Patient Identity Feed”)
Source (Patient Identity Source Actor) (1)			
Human Requestor (0..n)			
Destination (Patient Identifier Cross-reference Manager or Document Registry) (1)			
Audit Source (Patient Identity Source Actor) (1)			
Patient(1)			

Where:

<b>Source</b> AuditMessage/ ActiveParticipant	UserID	M	The identity of the Patient Identity Source Actor facility and sending application from the HL7 message; concatenated together, separated by the   character.
	AlternativeUserID	M	The process ID as used within the local operating system in the local system logs.
	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	M	EV(110153, DCM, “Source”)
	NetworkAccessPointTypeCode	M	“1” for machine (DNS) name, “2” for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Human Requestor (if known)</b>	UserID	M	Identity of the human that initiated the transaction.
	AlternativeUserID	U	not specialized
	UserName	U	not specialized

1335

<b>AuditMessage/ ActiveParticipant</b>	<i>UserIsRequestor</i>	<i>U</i>	<i>not specialized</i>
	RoleIDCode	<i>U</i>	Access Control role(s) the user holds that allows this transaction.
	NetworkAccessPointTypeCode	<i>U</i>	<i>not specialized</i>
	NetworkAccessPointID	<i>U</i>	<i>not specialized</i>

<b>Destination AuditMessage/ ActiveParticipant</b>	UserID	<i>M</i>	The identity of the Patient Identifier Cross-reference Manager or Document Registry facility and receiving application from the HL7 message; concatenated together, separated by the   character.
	<i>AlternativeUserID</i>	<i>U</i>	<i>not specialized</i>
	<i>UserName</i>	<i>U</i>	<i>not specialized</i>
	<i>UserIsRequestor</i>	<i>U</i>	<i>not specialized</i>
	RoleIDCode	<i>M</i>	EV(110152, DCM, "Destination")
	NetworkAccessPointTypeCode	<i>M</i>	"1" for machine (DNS) name, "2" for IP address
	NetworkAccessPointID	<i>M</i>	The machine name or IP address.

<b>Audit Source AuditMessage/ AuditSourceIdentification</b>	<i>AuditSourceID</i>	<i>U</i>	<i>not specialized</i>
	<i>AuditEnterpriseSiteID</i>	<i>U</i>	<i>not specialized</i>
	<i>AuditSourceTypeCode</i>	<i>U</i>	<i>not specialized</i>

1340

<b>Patient (AuditMessage/ ParticipantObjectIdentifi- cation)</b>	ParticipantObjectTypeCode	<i>M</i>	"1" (person)
	ParticipantObjectTypeCodeRole	<i>M</i>	"1" (patient)
	<i>ParticipantObjectDataLifeCycle</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectIDTypeCode</i>	<i>M</i>	<i>not specialized</i>
	<i>ParticipantObjectSensitivity</i>	<i>U</i>	<i>not specialized</i>
	ParticipantObjectID	<i>M</i>	the patient ID in HL7 CX format.
	<i>ParticipantObjectName</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectQuery</i>	<i>U</i>	<i>not specialized</i>
	ParticipantObjectDetail	<i>M</i>	Type=MSH-10 (the literal string), Value=the value of MSH-10 (from the message content, base64 encoded)

**3.8.5.2.2 Patient Identifier Cross-reference Manager or Document Registry Actor audit message:**

	<b>Field Name</b>	<b>Opt</b>	<b>Value Constraints</b>
<b>Event</b>	EventID	<i>M</i>	EV(110110, DCM, "Patient Record")

	EventActionCode	M	“D” (delete) for the Delete audit record “U” (update) for the Update audit record
	EventDateTime	M	not specialized
	EventOutcomeIndicator	M	not specialized
	EventTypeCode	M	EV(“ITI-8”, “IHE Transactions”, “Patient Identity Feed”)
Source (Patient Identity Source Actor) (1)			
Destination (Patient Identifier Cross-reference Manager or Document Registry) (1)			
Audit Source (Patient Identifier Cross-reference Manager or Document Registry) (1)			
Patient(1)			

1345

Where:

<b>Source</b> AuditMessage/ ActiveParticipant	UserID	M	The identity of the Patient Identity Source Actor facility and sending application from the HL7 message; concatenated together, separated by the   character.
	AlternativeUserID	U	not specialized
	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	M	EV(110153, DCM, “Source”)
	NetworkAccessPointTypeCode	M	“1” for machine (DNS) name, “2” for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Destination</b> AuditMessage/ ActiveParticipant	UserID	M	The identity of the Patient Identifier Cross-reference Manager or Document Registry facility and receiving application from the HL7 message; concatenated together, separated by the   character.
	AlternativeUserID	M	The process ID as used within the local operating system in the local system logs.
	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	M	EV(110152, DCM, “Destination”)
	NetworkAccessPointTypeCode	M	“1” for machine (DNS) name, “2” for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Audit Source</b> AuditMessage/ AuditSourceIdentification	AuditSourceID	U	not specialized
	AuditEnterpriseSiteID	U	not specialized
	AuditSourceTypeCode	U	not specialized

<b>Patient</b>	ParticipantObjectTypeCode	M	“1” (person)
----------------	---------------------------	---	--------------

	ParticipantObjectTypeCodeRole	M	“1” (patient)
	ParticipantObjectDataLifeCycle	U	not specialized
	ParticipantObjectIDTypeCode	M	Not specialized
	ParticipantObjectSensitivity	U	not specialized
	ParticipantObjectID	M	the patient ID in HL7 CX format.
	ParticipantObjectName	U	not specialized
	ParticipantObjectQuery	U	not specialized
	ParticipantObjectDetail	M	Type=MSH-10 (the literal string), Value=the value of MSH-10 (from the message content, base64 encoded)


### 3.9 PIX Query [ITI-9]

1350 This section corresponds to Transaction ITI-9 of the IHE IT Infrastructure Technical Framework. Transaction ITI-9 is used by the Patient Identifier Cross-reference Consumer and Patient Identifier Cross-reference Manager Actors.

#### 3.9.1 Scope

1355 This transaction involves a request by the Patient Identifier Cross-reference Consumer Actor for a list of patient identifiers that correspond to a patient identifier known by the consumer. The request is received by the Patient Identifier Cross-reference Manager. The Patient Identifier Cross-reference Manager immediately processes the request and returns a response in the form of a list of corresponding patient identifiers, if any.

#### 3.9.2 Use Case Roles

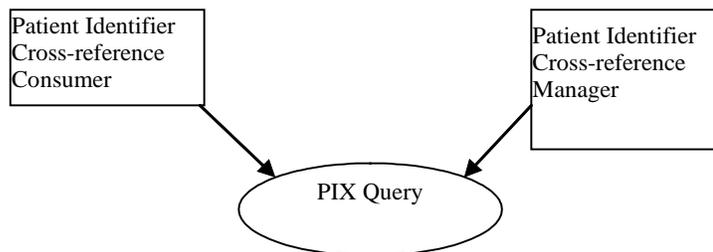

1360

**Actor:** Patient Identifier Cross-reference Consumer

**Role:** Queries the Patient Identifier Cross-reference Manager for a list of corresponding patient identifiers, if any

1365 **Actor:** Patient Identifier Cross-reference Manager

**Role:** Manages the cross-referencing of patient identifiers across Patient Identification Domains. Upon request it returns a list of corresponding patient identifiers, if any.


#### 3.9.3 Referenced Standard

HL7 2.5, Chapter 2 – Control, Chapter 3 – Patient Administration, Chapter 5 – Query

1370 HL7 version 2.5 was selected for this transaction for the following reasons:

It was considered the most stable version that contained the functionality required by transactions [ITI-9] and [ITI-10].

### 3.9.4 Interaction Diagram

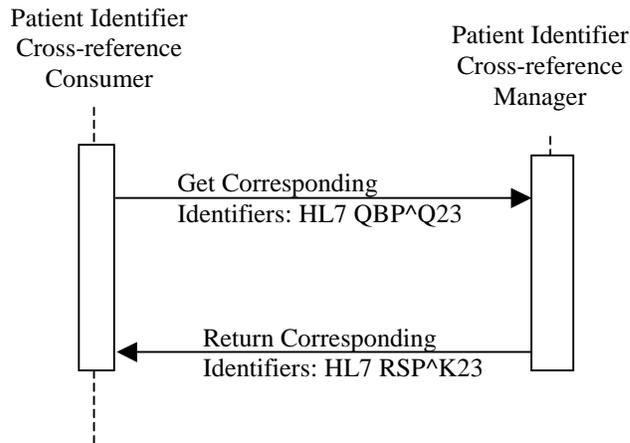

1375

**Figure 3.9-1: Get Corresponding Identifiers Sequence**

#### 3.9.4.1 Get Corresponding Identifiers

##### 3.9.4.1.1 Trigger Events

A Patient Identifier Cross-reference Consumer’s need to get the patient identifier associated with a domain for which it needs patient related information will trigger the request for corresponding patient identifiers message based on the following HL7 trigger event:

1380

- Q23 – Get Corresponding Identifiers

##### 3.9.4.1.2 Message Semantics

The Request for Corresponding Patient Identifiers transaction is conducted by the HL7 QBP^Q23 message. The Patient Identifier Cross-reference Consumer Actor shall generate the query message whenever it needs to obtain a corresponding patient identifier(s) from other Patient Identification Domain(s). The segments of the message listed below are required, and their detailed descriptions are provided in the following subsections.

1385

Note: Conventions used in this section as well as additional qualifications to the level of specification and HL7 profiling are stated in ITI TF-2x: Appendix C and C.1.

1390

**Table 3.9-1: QBP Query By Parameter**

QBP	Query By Parameter	Chapter in HL7 2.5
MSH	Message Header	2

QPD	Query Parameter Definition	5
RCP	Response Control Parameter	5

The receiver shall respond to the query by sending the RSP^K23 response message. This satisfies the requirements of original mode acknowledgment; no intermediate ACK message is to be sent.

#### 1395 3.9.4.1.2.1 MSH Segment

The MSH segment shall be constructed as defined in ITI TF-2x: C.2.2 “Message Control”.

Field *MSH-9 Message Type* shall have all three components populated with a value. The first component shall have a value of QBP; the second component shall have the value of Q23. The third component shall have a value of QBP\_Q21.

#### 1400 3.9.4.1.2.2 QPD Segment

The Patient Identifier Cross-reference Consumer Actor is required to send attributes within the QPD segment as described in Table 3.9-2.

**Table 3.9-2: IHE Profile - QPD segment**

SEQ	LEN	DT	OPT	TBL#	ITEM #	ELEMENT NAME
1	250	CE	R	0471	01375	Message Query Name
2	32	ST	R+		00696	Query Tag
3	250**	CX	R			Person Identifier
4	250	CX	O			What Domains Returned

1405 Adapted from the HL7 Standard, version 2.5

\*\* Note: This value assumes completion of an HL7 erratum to correct an error identified in the standard.

This message shall use the field QPD-3 *Person Identifier* to convey a single Patient ID uniquely identifying the patient within a given Patient Identification Domain.

1410 The Patient Identifier Cross-reference Consumer Actor shall provide the patient identifier in the ID component (first component) of the QPD-3 field (QPD-3.1).

The Patient Identifier Cross-reference Consumer Actor shall provide component QPD-3.4, Assigning Authority, by including either the first subcomponent (namespace ID) or the second and third subcomponents (universal ID and universal ID type) If all three subcomponents are populated, the first subcomponent shall reference the same entity as is referenced by the second and third components.

1415

If the requesting system wishes to select the domains from which they wish to receive Patient IDs, it does so by populating *QPD-4-What Domains Returned* with as many repetitions as domains for which it wants to receive Patient IDs. Each repetition of QPD-4 shall contain an instance of data type CX in which only the fourth component (Assigning Authority) is populated;

1420

the remaining components shall be empty. The responding system shall return the Patient ID value for each requested domain if a value is known.

1425 If QPD-4 is empty, the Patient Identifier Cross-reference Manager Actor shall return Patient IDs for all domains for which it possesses a corresponding Patient ID (subject to local publication restrictions).

The Consumer shall specify “IHE PIX Query” for QPD-1 Message Query Name.

### **3.9.4.1.2.3 RCP Segment**

1430 Although HL7 requires that the RCP Segment be sent in all QBP messages, IHE does not require that the Patient Identifier Cross-reference Consumer Actor send any attributes within the RCP segment, as is specified in the HL7 standard.

#### **3.9.4.1.2.3.1 Populating RCP-1-Query Priority**

Field *RCP-1-Query Priority* shall always contain **I**, signifying that the response to the query is to be returned in Immediate mode.

#### **3.9.4.1.3 Expected Actions**

1435 The Patient Identifier Cross-reference Manager shall be capable of accepting attributes in the QPD segment as specified in Table 3.9-2.

The Patient Identifier Cross-reference Manager Actor must be capable of receiving all valid combinations of subcomponents that make up the Assigning Authority component (i.e., all valid combinations of QPD-3.4).

1440 The Patient Identifier Cross-reference Manager Actor shall be capable of accepting multiple concurrent PIX Query requests (Get Corresponding Identifiers messages) and responding correctly using the Return Corresponding Identifiers message.

### **3.9.4.2 Return Corresponding Identifiers**

#### **3.9.4.2.1 Trigger Events**

1445 The Patient Identifier Cross-reference Manager’s response to the Get Patient Identifiers message will trigger the following message:

- K23 – Corresponding patient identifiers

#### **3.9.4.2.2 Message Semantics**

1450 The Return Corresponding Identifiers transaction is conducted by the HL7 RSP^K23 message. The Patient Identifier Cross-reference Manager Actor shall generate this message in direct response to the QBP^Q23 query message previously received. This message satisfies the Application Level, Original Mode Acknowledgement for the HL7 QBP^Q23 message. The segments of the message listed without enclosing square brackets in the table below are required. Detailed descriptions of all segments listed in the table below are provided in the following subsections. Other segments of the message are optional.

1455

Note: Conventions used in this section as well as additional qualifications to the level of specification and HL7 profiling are stated in ITI TF-2x: Appendix C and C.1.

**Table 3.9-3: RSP Segment Pattern Response**

RSP	Segment Pattern Response	Chapter in HL7 2.5
MSH	Message Header	2
MSA	Message Acknowledgement	2
[ERR]	Error segment	2
QAK	Query Acknowledgement	5
QPD	Query Parameter Definition	5
[PID]	Patient Identification	3

1460

### 3.9.4.2.2.1 MSH Segment

The MSH segment shall be constructed as defined in ITI TF-2x: C.2.2, “Message Control”.

Field *MSH-9-Message Type* shall have all three components populated with a value. The first component shall have a value of RSP; the second component shall have the value of K23. The third component shall have a value of RSP\_K23.

1465

### 3.9.4.2.2.2 MSA Segment

The Patient Identifier Cross-reference Manager Actor is not required to send any attributes within the MSA segment beyond what is specified in the HL7 standard. See ITI TF-2x: C.2.3 for the list of all required and optional fields within the MSA segment.

### 3.9.4.2.2.3 QAK Segment

The Patient Identifier Cross-reference Manager Actor shall send attributes within the QAK segment as defined in Table 3.9-4. For the details on filling in QAK-2 (Query Response Status) refer to Section 3.9.4.2.2.6.

1475

**Table 3.9-4: IHE Profile - QAK segment**

SEQ	LEN	DT	OPT	TBL#	ITEM#	ELEMENT NAME
1	32	ST	R		00696	Query Tag
2	2	ID	R+	0208	00708	Query Response Status

Adapted from the HL7 standard, version 2.5

### 3.9.4.2.2.4 QPD Segment

The Patient Identifier Cross-reference Manager Actor shall echo the QPD Segment value that was sent in the QBP^Q23 message.

1480

### 3.9.4.2.2.5 PID Segment

The Patient Identifier Cross-reference Manager Actor shall return only those attributes within the PID segment that are required by the HL7 standard: *PID-3-Patient IdentifierList* and *PID-5-Patient Name*.

1485 The PID segment is returned only when the Patient Identifier Cross-reference Manager Actor recognizes the specified Patient Identification Domain and Patient ID and an identifier exists for the specified patient in at least one other domain. See Section 3.9.4.2.2.6, “Patient Identifier Cross-reference Manager Actor Query Response Behavior,” for a detailed description of how the Patient Identifier Cross-reference Manager Actor responds to the query request under various  
1490 circumstances.

The Patient Identifier Cross-reference Manager Actor shall use the field PID-3 Patient Identifier List to convey the Patient ID uniquely identifying the patient within each Patient Identification Domain for which a Patient ID exists for the specified patient. Each resulting ID returned in PID-3 shall include a fully qualified Assigning Authority component. In other words, the Assigning  
1495 Authority component returned shall include ALL subcomponents (namespace ID, Universal ID, and Universal ID type).

To eliminate the issue of conflicting name values between Patient Identifier Domains, the Patient Identifier Cross-reference Manager Actor shall return in an empty (not present) value in the first repetition of field PID-5-Patient Name, and shall return a second repetition of field *PID-5-Patient Name* in which the only populated component is Component 7 (Name Type Code).  
1500 Component 7 of repetition 2 shall contain a value of S (Coded Pseudo-name to assure anonymity). All other components of repetition 2 shall be empty (not present).

### 3.9.4.2.2.6 Patient Identifier Cross-reference Manager Actor Query Response Behavior

1505 It is wholly the responsibility of the Patient Identifier Cross-reference Manager Actor to perform the matching of patient identifiers based on the patient traits it receives. The information provided by the Patient Identifier Cross-reference Manager Actor to Patient Identifier Cross-reference Consumer Actors is a list of cross-referenced identifiers in two or more of the domains managed by the cross-referencing Actor. The list of cross-references is not made available until  
1510 the set of policies and processes for managing the cross-reference function have been completed. The policies of administering identities adopted by the cooperating domains are completely internal to the Patient Identifier Cross-reference Manager Actor and are outside of the scope of this framework. Possible matches should not be communicated until the healthcare institution policies and processes embodied in the Patient Identifier Cross-reference Manager Actor reach a  
1515 positive matching decision.

The Patient Identifier Cross-reference Manager Actor shall respond to the query request as described by the following 6 cases:

**Case 1:** The Patient Identifier Cross-reference Manager Actor recognizes the specified Patient Identification Domain and Patient ID sent by the Patient Identifier Cross-reference Consumer in  
1520 QPD-3, and corresponding identifiers exist for the specified patient in at least one of the domains requested in QPD-4 (one identifier per domain). (See Case 6 below for the required behavior if

there are multiple identifiers recognized within a given Identifier Domain by the Patient Identifier Cross-reference Manager Actor.)

**AA** (application accept) is returned in MSA-1.

1525 **OK** (data found, no errors) is returned in QAK-2.

A single PID segment is returned in which one repetition of *PID-3 Patient Identifier List* is populated for each of the domains, if any, that the Patient Identifier Cross-reference Manager Actor did recognize in which a single identifier exists for the requested patient, not including the queried-for patient identifier that is returned in QPD-3.

1530 **Case 2:** The Patient Identifier Cross-reference Manager Actor recognizes the Patient Identification Domain and Patient ID sent in QPD-3, but no identifier exists for that patient in any of the domains sent in QPD-4.

**AA** (application accept) is returned in MSA-1.

**NF** (no data found, no errors) is returned in QAK-2.

1535 No PID segment is returned.

**Case 3:** The Patient Identifier Cross-reference Manager Actor recognizes the specified Patient Identification Domain sent in the fourth component of QPD-3, but does not recognize the Patient ID sent in the first component of QPD-3.

**AE** (application error) is returned in MSA-1 and in QAK-2.

1540 An ERR segment is returned in which the components of *ERR-2-Error Location* are valued as follows.

COMP #	COMPONENT NAME	VALUE
1	Segment ID	QPD
2	Sequence	1
3	Field Position	3
4	Field Repetition	1
5	Component Number	1
6	Sub-Component Number	(empty)

1545 As specified by HL7, *ERR-2.6-Sub-Component Number* is not valued because we are referring to the entire fourth component of field QPD-3.

*ERR-3-HL7 Error Code* is populated with the error condition code **204** (unknown key identifier). Together with the values in ERR-2, this signifies that the Patient Identifier Cross-reference Manager Actor did not recognize the value in the first component of QPD-3.

1550 **Case 4:** The Patient Identifier Cross-reference Manager Actor does not recognize the Patient Identification Domain of the identifier sent in QPD-3.

**AE** (application error) is returned in MSA-1 and in QAK-2.

An ERR segment is returned in which the components of *ERR-2-Error Location* are valued as follows.

COMP #	COMPONENT NAME	VALUE
1	Segment ID	QPD
2	Sequence	1
3	Field Position	3
4	Field Repetition	1
5	Component Number	4
6	Sub-Component Number	(empty)

1555

As specified by HL7, *ERR-2.6-Sub-Component Number* is not valued because we are referring to the entire fourth component of field QPD-3.

*ERR-3-HL7 Error Code* is populated with the error condition code **204** (unknown key identifier). Together with the values in ERR-2, this signifies that the Patient Identifier Cross-reference Manager Actor did not recognize the value in the fourth component of QPD-3.

1560

**Case 5:** The Patient Identifier Cross-reference Manager Actor does not recognize one or more of the Patient Identification Domains for which an identifier has been requested.

**AE** (application error) is returned in MSA-1 and in QAK-2.

For one domain that was not recognized, an ERR segment is returned in which the components of *ERR-2-Error Location* are valued as indicated below.

1565

COMP #	COMPONENT NAME	VALUE
1	Segment ID	QPD
2	Sequence	1
3	Field Position	4
4	Field Repetition	(see below)
5	Component Number	(empty)
6	Sub-Component Number	(empty)

As specified by HL7, *ERR-2.5-Component Number* and *ERR-2.6-Sub-Component Number* are not valued because we are referring to the entire field QPD-4.

*ERR-3-HL7 Error Code* is populated with the error condition code **204** (unknown key identifier). Together with the values in ERR-2, this signifies that the Patient Identifier Cross-reference Manager Actor did not recognize the domain for the occurrence of *QPD-4-What Domains Returned* whose ordinal number is returned as an integer in ERR-2.4.

1570

**Case 6:** The Patient Identifier Cross-reference Manager Actor recognizes the specified Patient Identification Domain and Patient ID sent by the Patient Identifier Cross-reference Consumer in

1575

QPD-3, and corresponding identifiers exist for the specified patient in at least one of the domains requested in QPD-4, and there are multiple identifiers within at least one of the requested domains.

AA (application accept) is returned in MSA-1.

1580 OK (data found, no errors) is returned in QAK-2.

A single PID segment is returned in which one repetition of *PID-3-Patient Identifier List* is populated for each of the identifiers, not including the queried-for patient identifier that is returned in QPD-3. If the Patient Identifier Cross-reference Manager chooses to return multiple identifiers associated with the same domain, it shall return these identifiers grouped in successive repetitions within the *PID-3-Patient Identifier List*.

1585

### 3.9.4.2.3 Expected Actions

The Patient Identifier Cross-reference Consumer will use the list of patient identifier aliases provided by the Patient Identifier Cross-reference Manager to perform the functions for which it requested the list.

1590 In the case where the returned list of identifiers contains multiple identifiers for a single domain, the Patient Identifier Cross-reference Consumer shall either use ALL of the multiple identifiers from the given domain or it shall ignore ALL of the multiple identifiers from the given domain.

This allows Patient Identifier Cross-reference Consumers capable of handling multiple identities for a single patient within a single domain (i.e., those that can correctly aggregate the information associated with the different identifiers) to do so. For those Patient Identifier Cross-reference Consumers not capable of handling this situation, ignoring the entire list of different identifiers prevents the Consumer from presenting incomplete data.

1595

### 3.9.5 Security Considerations

#### 3.9.5.1 Audit Record Considerations

1600 The PIX Query Transaction is a Query Information event as defined in Table 3.20.4.1.1.1-1 with the following exceptions:

##### 3.9.5.1.1 Patient Identifier Cross-reference Consumer audit message:

	Field Name	Opt	Value Constraints
<b>Event</b> AuditMessage/ EventIdentification	EventID	M	EV(110112, DCM, "Query")
	EventActionCode	M	"E" (Execute)
	EventDateTime	M	not specialized
	EventOutcomeIndicator	M	not specialized
	EventTypeCode	M	EV("ITI-9", "IHE Transactions", "PIX Query")
Source (Patient Identifier Cross-reference Consumer) (1)			
Human Requestor (0..n)			
Destination (Patient Identifier Cross-reference Manager) (1)			
Audit Source (Patient Identity Cross-reference Consumer) (1)			
Patient (0..n)			
Query Parameters(1)			

1605

Where:

<b>Source</b> AuditMessage/ ActiveParticipant	UserID	M	The identity of the Patient Identifier Cross-reference Consumer Actor facility and sending application from the HL7 message; concatenated together, separated by the   character.
	AlternativeUserID	M	The process ID as used within the local operating system in the local system logs.
	<i>UserName</i>	<i>U</i>	<i>not specialized</i>
	<i>UserIsRequestor</i>	<i>U</i>	<i>not specialized</i>
	RoleIDCode	M	EV(110153, DCM, "Source")
	NetworkAccessPointTypeCode	M	"1" for machine (DNS) name, "2" for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Human Requestor (if known)</b> AuditMessage/ ActiveParticipant	UserID	M	Identity of the human that initiated the transaction.
	<i>AlternativeUserID</i>	<i>U</i>	<i>not specialized</i>
	<i>UserName</i>	<i>U</i>	<i>not specialized</i>
	<i>UserIsRequestor</i>	<i>U</i>	<i>not specialized</i>
	RoleIDCode	U	Access Control role(s) the user holds that allows this transaction.
	NetworkAccessPointTypeCode	<i>U</i>	<i>not specialized</i>
	NetworkAccessPointID	<i>U</i>	<i>not specialized</i>

<b>Destination</b> AuditMessage/ ActiveParticipant	UserID	M	The identity of the Patient Identifier Cross-reference Manager facility and receiving application from the HL7 message; concatenated together, separated by the   character.
	<i>AlternativeUserID</i>	<i>U</i>	<i>not specialized</i>
	<i>UserName</i>	<i>U</i>	<i>not specialized</i>
	<i>UserIsRequestor</i>	<i>U</i>	<i>not specialized</i>
	RoleIDCode	M	EV(110152, DCM, "Destination")
	NetworkAccessPointTypeCode	M	"1" for machine (DNS) name, "2" for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Audit Source</b> AuditMessage/ AuditSourceIdentification	<i>AuditSourceID</i>	<i>U</i>	<i>not specialized</i>
	<i>AuditEnterpriseSiteID</i>	<i>U</i>	<i>not specialized</i>
	<i>AuditSourceTypeCode</i>	<i>U</i>	<i>not specialized</i>

1610

<b>Patient</b> (AuditMessage/ ParticipantObjectIdentification)	ParticipantObjectTypeCode	M	"1" (Person)
	ParticipantObjectTypeCodeRole	M	"1" (Patient)
	<i>ParticipantObjectDataLifeCycle</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectIDTypeCode</i>	<i>M</i>	<i>Not specialized</i>
	<i>ParticipantObjectSensitivity</i>	<i>U</i>	<i>not specialized</i>
	ParticipantObjectID	M	The patient ID in HL7 CX format.

	<i>ParticipantObjectName</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectQuery</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectDetail</i>	<i>U</i>	<i>not specialized</i>

<b>Query Parameters</b> <small>(AuditMessage/ ParticipantObjectIdentification)</small>	ParticipantObjectTypeCode	M	"2" (system object)
	ParticipantObjectTypeCodeRole	M	"24" (query)
	<i>ParticipantObjectDataLifeCycle</i>	<i>U</i>	<i>not specialized</i>
	ParticipantObjectIDTypeCode	M	EV("ITI-9", "IHE Transactions", "PIX Query")
	<i>ParticipantObjectSensitivity</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectID</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectName</i>	<i>U</i>	<i>not specialized</i>
	ParticipantObjectQuery	M	The complete query message (including MSH and QPD segments), base64 encoded.
ParticipantObjectDetail	M	Type=MSH-10 (the literal string), Value=the value of MSH-10 (from the message content, base64 encoded)	

### 3.9.5.1.2 Patient Identifier Cross-reference Manager audit message:

	Field Name	Opt	Value Constraints
<b>Event</b> <small>AuditMessage/ EventIdentification</small>	EventID	M	EV(110112, DCM, "Query")
	EventActionCode	M	"E" (Execute)
	<i>EventDateTime</i>	<i>M</i>	<i>not specialized</i>
	<i>EventOutcomeIndicator</i>	<i>M</i>	<i>not specialized</i>
	EventTypeCode	M	EV("ITI-9", "IHE Transactions", "PIX Query")
Source (Patient Identifier Cross-reference Manager) (1)			
Destination (Patient Identifier Cross-reference Consumer) (1)			
Audit Source (Patient Identifier Cross-reference Manager) (1)			
Patient (0..n)			
Query Parameters(1)			

Where:

<b>Source</b> <small>AuditMessage/ ActiveParticipant</small>	UserID	M	The identity of the Patient Identifier Cross-reference Consumer Actor facility and sending application from the HL7 message; concatenated together, separated by the   character.
	<i>AlternativeUserID</i>	<i>U</i>	<i>not specialized</i>
	<i>UserName</i>	<i>U</i>	<i>not specialized</i>
	UserIsRequestor	U	<i>not specialized</i>
	RoleIDCode	M	EV(110153, DCM, "Source")
	NetworkAccessPointTypeCode	M	"1" for machine (DNS) name, "2" for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Destination</b> <small>AuditMessage/ ActiveParticipant</small>	UserID	M	The identity of the Patient Identifier Cross-reference Manager facility and receiving application from the HL7 message; concatenated together, separated by the   character.
--	--------	---	--

	AlternativeUserID	M	The process ID as used within the local operating system in the local system logs.
	<i>UserName</i>	<i>U</i>	<i>not specialized</i>
	<i>UserIsRequestor</i>	<i>U</i>	<i>not specialized</i>
	RoleIDCode	M	EV(110152, DCM, "Destination")
	NetworkAccessPointTypeCode	M	"1" for machine (DNS) name, "2" for IP address
	NetworkAccessPointID	M	The machine name or IP address.

1615

<b>Audit Source</b> (AuditMessage/ AuditSourceIdentification)	<i>AuditSourceID</i>	<i>U</i>	<i>not specialized</i>
	<i>AuditEnterpriseSiteID</i>	<i>U</i>	<i>not specialized</i>
	<i>AuditSourceTypeCode</i>	<i>U</i>	<i>not specialized</i>

<b>Patient</b> (AuditMessage/ ParticipantObjectIdentification)	ParticipantObjectTypeCode	M	"1" (Person)
	ParticipantObjectTypeCodeRole	M	"1" (Patient)
	<i>ParticipantObjectDataLifeCycle</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectIDTypeCode</i>	<i>M</i>	<i>Not specialized</i>
	ParticipantObjectSensitivity	<i>U</i>	<i>not specialized</i>
	ParticipantObjectID	M	The patient ID in HL7 CX format.
	<i>ParticipantObjectName</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectQuery</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectDetail</i>	<i>U</i>	<i>not specialized</i>

<b>Query Parameters</b> (AuditMessage/ ParticipantObjectIdentification)	ParticipantObjectTypeCode	M	"2" (system object)
	ParticipantObjectTypeCodeRole	M	"24" (query)
	<i>ParticipantObjectDataLifeCycle</i>	<i>U</i>	<i>not specialized</i>
	ParticipantObjectIDTypeCode	M	EV("ITI-9", "IHE Transactions", "PIX Query")
	<i>ParticipantObjectSensitivity</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectID</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectName</i>	<i>U</i>	<i>not specialized</i>
	ParticipantObjectQuery	M	The complete query message (including MSH and QPD segments), base64 encoded.
	ParticipantObjectDetail	M	Type=MSH-10 (the literal string), Value=the value of MSH-10 (from the message content, base64 encoded)

### 3.10 PIX Update Notification [ITI-10]


1620 This section corresponds to Transaction ITI-10 of the IHE IT Infrastructure Technical Framework. Transaction ITI-10 is used by the Patient Identifier Cross-reference Consumer and Patient Identifier Cross-reference Manager Actors.

#### 3.10.1 Scope

1625 This transaction involves the Patient Identifier Cross-reference Manager Actor providing notification of updates to patient identifier cross-reference associations to Patient Identifier

Cross-reference Consumers that have registered (by configuration on the Cross-reference Manager) their interest in receiving such notifications. This transaction uses HL7's generic 'Update Person Information' message to communicate this patient-centric information.

### 3.10.2 Use Case Roles

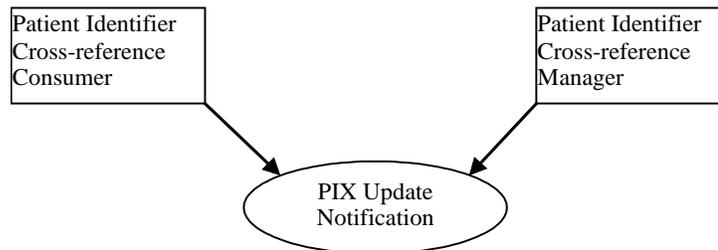

1630

**Actor:** Patient Identifier Cross-reference Manager

**Role:** It serves a well-defined set of Patient Identification Domains. The Patient Identifier Cross-reference Manager manages the cross-referencing of patient identifiers across Patient Identification Domains by providing a list of patient ID “aliases” via notification to a configured list of interested Patient Identifier Cross-reference Consumers.

1635

**Actor:** Patient Identifier Cross-reference Consumer

1640

**Role:** Receives notifications from the Patient Identifier Cross-reference Manager of changes to patient ID aliases. Typically the Patient Identifier Cross-reference Consumer Actor uses this information to maintain information links about patients in a different patient ID domain.

### 3.10.3 Referenced Standard


HL7 Version 2.5, Chapter 2 – Control, Chapter 3 – Patient Administration

HL7 version 2.5 was selected for this transaction for the following reason:

1645

It was considered the most stable version that contained the functionality required by Transaction ITI-9 and ITI-10.

### 3.10.4 Interaction Diagram

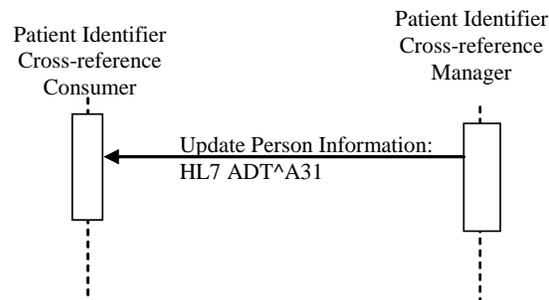

**Figure 3.10-1: Update Person Information Sequence**

#### 1650 3.10.4.1 Update Person Information

##### 3.10.4.1.1 Trigger Events

The Patient Identifier Cross-reference Manager shall notify a Patient Identifier Cross-reference Consumer when there is a change in a set of cross-referenced patient identifiers for any of the patient identifiers belonging to Patient Identifier Domains of interest to the consumer. The configuration of the domains of interest to a Patient Cross-reference Consumer is maintained by the Patient Cross-reference Manager.

Several notifications may have to be issued to communicate a single update to a set of cross-reference patient identifiers as required to reflect all the changes on the resulting sets of cross-reference patient Identifiers belonging to Patient Identifier Domains of interest to the Patient Identifier Cross-referencing Consumer.

The following HL7 trigger event will be used to update to the list of patient identifiers:

- A31 – Update Person Information

##### 3.10.4.1.2 Message Semantics

The PIX Update Notification transaction is conducted by the ADT^A31 message. The Patient Identifier Cross-reference Manager initiates this transaction whenever identifier list information is updated for a patient.

It is wholly the responsibility of the Patient Identifier Cross-reference Manager to perform the matching of patient identifiers based on the patient traits it receives. The information provided by the Patient Identifier Cross-reference Manager to Patient Identifier Cross-reference Consumers shall only contain a list of cross-referenced identifiers for the domains of interest as configured with the Patient Identifier Cross-reference Manager in two or more of the domains managed by the Patient Identifier Cross-reference Manager. Multiple notifications may need to be sent. For example:

1675 Consumer CON\_A is configured to receive update notifications for domains DOM\_A and DOM\_AD. Notifications are sent as follows:

- A PIX A01 feed is sent for a patient for DOM\_A. The update notification shall contain the patient identifier and assigning authority for DOM\_A.
- 1680 • A PIX A01 feed is processed for DOM\_AD. The Patient Identifier Cross-reference Manager cross references this patient with DOM\_A. The update notification shall contain the patient identifier and assigning authority for DOM\_A and DOM\_AD.
- 1685 • A PIX A08 feed is processed for DOM\_AD changing the patient address. The Patient Identifier Cross-reference Manager cross references determines this patient is no longer the same patient as DOM\_A. Two update notifications shall be sent. One containing the patient identifier and assigning authority for DOM\_A. The other one containing the patient identifier and assigning authority for DOM\_AD.

1690 The list of cross-references is not made available until the set of policies and processes for managing the cross-reference function have been completed. The policies of administering identities adopted by the cooperating domains are completely internal to the Patient Identifier Cross-reference Manager and are outside of the scope of this standard. Possible matches should not be communicated until the healthcare institution policies and processes embodied in the Patient Identifier Cross-reference Manager reach a positive matching decision.

1695 The Patient Identifier Cross-reference Manager configuration is expected to have configuration indicating which Consumers are interested in receiving the PIX Update Notification transactions. This configuration information shall include identification of the identity consumer systems interested in receiving notifications and, for each of those systems, a list of the patient identifier domains of interest. The Patient Identifier Cross-reference Manager should account for consumers interested in all domains.

The segments of the message listed in the table below are required. Other segments are optional.

1700

**Table 3.10-1: ADT Patient Administration Message**

ADT	Patient Administration Message	Chapter in HL7 2.5
MSH	Message Header	2
EVN	Event Type	3
PID	Patient Identification	3
PV1	Patient Visit	3

Each message shall be acknowledged by the HL7 ACK message sent by the receiver of ADT message to its sender. See ITI TF-2x: C.2.3, “Acknowledgement Modes” for the definition and discussion of the ACK message.

1705 **3.10.4.1.2.1 MSH Segment**

The MSH segment shall be constructed as defined in ITI TF-2x: C.2.2, “Message Control”.

Field *MSH-9 Message Type* shall have all three components populated with a value. The first component shall have a value of ADT; the second component shall have the value of A31. The third component shall have a value of ADT\_A05.

1710 **3.10.4.1.2.2 EVN Segment**

See ITI TF-2x: C.2.4 for the list of all required and optional fields within the EVN segment.

**3.10.4.1.2.3 PID Segment**

1715 The Patient Identifier Cross-reference Manager Actor shall provide only those attributes within the PID segment that are required by the HL7 standard: *PID-3-Patient Identifier List* and *PID-5-Patient Name*.

1720 The Patient Identifier Cross-reference Manager Actor shall use the field *PID-3 Patient Identifier List* to convey the Patient IDs uniquely identifying the patient within each Patient Identification Domain for which a Patient ID exists for the specified patient. Each resulting ID returned in PID-3 shall include a fully qualified Assigning Authority component. In other words, the Assigning Authority component returned shall include ALL subcomponents (namespace ID, Universal ID, and Universal ID type).

To eliminate the issue of multiple name values between Patient Identifier Domains, the Patient Identifier Cross-reference Manager Actor shall return a single space character in field *PID-5-Patient Name*.

1725 A single PID segment is sent in which one repetition of *PID-3-Patient Identifier List* is populated for each of the identifiers in the notification. If the Patient Identifier Cross-reference Manager Actor chooses to send multiple identifiers associated with the same domain, it shall return these identifiers grouped in successive repetitions within the *PID-3-Patient Identifier List*.

**3.10.4.1.2.4 PV1 Segment**

1730 As is specified by the HL7 Standard, Version 2.5, the PV1 Segment is required. The required field *PV1-2-patient class* shall contain **N** (not applicable) to indicate the transmission of patient information outside the context of a visit or encounter. Other fields shall be left blank.

**Table 3.10-2: IHE Profile – PV1 segment**

SEQ	LEN	DT	OPT	TBL#	ITEM#	ELEMENT NAME
2	1	IS	R	0004	00132	Patient Class

1735 Adapted from the HL7 Standard, version 2.5

**3.10.4.1.3 Expected Actions**

The Patient Identifier Cross-reference Consumer, when it receives the ADT^A31 message, shall update its internal identifier information for the affected patient(s) in all domains in which it is

1740 interested whenever it receives updated identifier information that results in a change to the cross-referencing of a patient.

In the case where the returned list of identifiers contains multiple identifiers for a single domain, the Patient Identifier Cross-reference Consumer shall either use ALL of the multiple identifiers from the given domain or it shall ignore ALL of the multiple identifiers from the given domain.

1745 This allows Patient Identifier Cross-reference Consumers capable of handling multiple identities for a single patient within a single domain (i.e., those that can correctly aggregate the information associated with the different identifiers) to do so. For those Patient Identifier Cross-reference Consumers not capable of handling this situation, ignoring the entire list of different identifiers prevents the consumer from presenting incomplete data.

1750 **3.10.5 Security Considerations**

**3.10.5.1 Audit Record Considerations**

The PIX Update Notification Transaction is a “Patient Record” event, as defined in Table 3.20.4.1.1.1-1 with the following exceptions:

1755 **3.10.5.1.1 Patient Identifier Cross-reference Manager audit message:**

	Field Name	Opt	Value Constraints
<b>Event</b> AuditMessage/ EventIdentification	EventID	M	EV(110110, DCM, “Patient Record”)
	EventActionCode	M	“R” (Read)
	EventDateTime	M	not specialized
	EventOutcomeIndicator	M	not specialized
	EventTypeCode	M	EV(“ITI-10”, “IHE Transactions”, “PIX Update Notification”)
Source (Patient Identifier Cross-reference Manager) (1)			
Human Requestor (0..n)			
Destination (Patient Identifier Cross-reference Consumer) (1)			
Audit Source (Patient Identifier Cross-reference Manager) (1)			
Patient IDs(1..n) (represents the components of PID-3)			

Where:

<b>Source</b> AuditMessage/ ActiveParticipant	UserID	M	The identity of the Patient Identifier Cross-reference Manager Actor facility and sending application from the HL7 message; concatenated together, separated by the   character.
	AlternativeUserID	M	The process ID as used within the local operating system in the local system logs.
	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	M	EV(110153, DCM, “Source”)
	NetworkAccessPointTypeCode	M	“1” for machine (DNS) name, “2” for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Human</b>	UserID	M	Identity of the human that initiated the transaction.
	AlternativeUserID	U	not specialized

<b>Requestor (if known)</b> AuditMessage/ ActiveParticipant	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	U	Access Control role(s) the user holds that allows this transaction.
	NetworkAccessPointTypeCode	U	not specialized
	NetworkAccessPointID	U	not specialized

<b>Destination</b> AuditMessage/ ActiveParticipant	UserID	M	The identity of the Patient Identifier Cross-reference Consumer facility and receiving application from the HL7 message; concatenated together, separated by the   character.
	AlternativeUserID	U	not specialized
	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	M	EV(110152, DCM, "Destination")
	NetworkAccessPointTypeCode	M	"1" for machine (DNS) name, "2" for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Audit Source</b> AuditMessage/ AuditSourceIdentification	AuditSourceID	U	not specialized
	AuditEnterpriseSiteID	U	Not specialized
	AuditSourceTypeCode	U	Not specialized

1760

<b>Patient IDs</b> (AuditMessage/ ParticipantObjectIdentification)	ParticipantObjectTypeCode	M	"1" (Person)
	ParticipantObjectTypeCodeRole	M	"1" (Patient)
	ParticipantObjectDataLifeCycle	U	not specialized
	ParticipantObjectIDTypeCode	M	not specialized
	ParticipantObjectSensitivity	U	not specialized
	ParticipantObjectID	M	the patient ID in HL7 CX format.
	ParticipantObjectName	U	not specialized
	ParticipantObjectQuery	U	not specialized
	ParticipantObjectDetail	M	Type=MSH-10 (the literal string), Value=the value of MSH-10 (from the message content, base64 encoded)

### 3.10.5.1.2 Patient Identifier Cross-reference Consumer audit message:

	Field Name	Opt	Value Constraints
<b>Event</b> AuditMessage/ EventIdentification	EventID	M	EV(110110, DCM, "Patient Record")
	EventActionCode	M	"U" (update)
	EventDateTime	M	not specialized
	EventOutcomeIndicator	M	not specialized
	EventTypeCode	M	EV("ITI-10", "IHE Transactions", "PIX Update Notification")
Source (Patient Identifier Cross-reference Manager) (1)			
Destination (Patient Identifier Cross-reference Consumer) (1)			
Audit Source (Patient Identifier Cross-reference Consumer) (1)			
Patient IDs(1..n) (represents the components of PID-3)			

Where:

<b>Source</b> (AuditMessage/ ActiveParticipant)	UserID	M	The identity of the Patient Identifier Cross-reference Manager Actor facility and sending application from the HL7 message; concatenated together, separated by the   character.
	AlternativeUserID	U	<i>not specialized</i>
	UserName	U	<i>not specialized</i>
	UserIsRequestor	U	<i>not specialized</i>
	RoleIDCode	M	EV(110153, DCM, "Source")
	NetworkAccessPointTypeCode	M	"1" for machine (DNS) name, "2" for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Destination</b> (AuditMessage/ ActiveParticipant)	UserID	M	The identity of the Patient Identifier Cross-reference Consumer facility and receiving application from the HL7 message; concatenated together, separated by the   character.
	AlternativeUserID	M	The process ID as used within the local operating system in the local system logs.
	UserName	U	<i>not specialized</i>
	UserIsRequestor	U	<i>not specialized</i>
	RoleIDCode	M	EV(110152, DCM, "Destination")
	NetworkAccessPointTypeCode	M	"1" for machine (DNS) name, "2" for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Audit Source</b> (AuditMessage/ AuditSourceIdentification)	AuditSourceID	U	<i>not specialized</i>
	AuditEnterpriseSiteID	U	<i>not specialized</i>
	AuditSourceTypeCode	U	<i>not specialized</i>

1765

<b>Patient IDs</b> (AuditMessage/ ParticipantObjectIdentification)	ParticipantObjectTypeCode	M	"1" (Person)
	ParticipantObjectTypeCodeRole	M	"1" (Patient)
	ParticipantObjectDataLifeCycle	U	<i>not specialized</i>
	ParticipantObjectIDTypeCode	M	<i>Not specialized</i>
	ParticipantObjectSensitivity	U	<i>not specialized</i>
	ParticipantObjectID	M	the patient ID in HL7 CX format.
	ParticipantObjectName	U	<i>not specialized</i>
	ParticipantObjectQuery	U	<i>not specialized</i>
	ParticipantObjectDetail	M	Type=MSH-10 (the literal string), Value=the value of MSH-10 (from the message content, base64 encoded)

### 3.11 Retrieve Specific Information for Display [ITI-11]

This section corresponds to Transaction ITI-11 of the IHE IT Infrastructure Technical Framework. Transaction ITI-11 is used by the Information Source and Display Actors.

1770


#### 3.11.1 Scope

This transaction involves the query of information for presentation purposes. This may occur when a user attempts to lookup information associated with certain patient that is stored on a

1775 different system. Note that the retrieved information is always related to a well-identified patient (Patient ID), but its content, although of a specific type (lab summary, or radiology summary, list of allergies), is generally dynamic (i.e., retrieving the same type of specific information at a different point in time is likely to result in different content); for example, a list of allergies may have been updated between two requests.

1780 To support a wide range of display capabilities, the information provided is formatted into well-formed XHTML. Such formatting shall be done using XHTML Basic and W3C HTML Compatibility Guidelines provided in the Appendix C of the W3C XHTML 1.0 Recommendation.

### 3.11.2 Use Case Roles

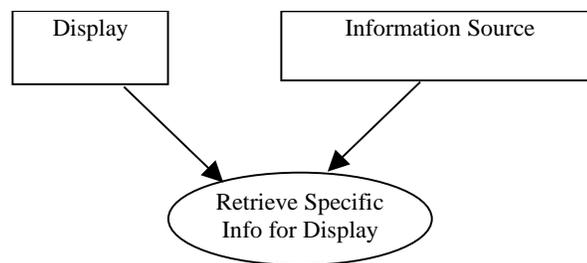

1785

**Actor:** Display

**Role:** A system that requests specific information for display, and displays it.

**Actor:** Information Source

1790 **Role:** A system that provides specific information in response to the request from the Display Actor, in a presentation-ready format.

### 3.11.3 Referenced Standards

IETF RFC 1738, Uniform Resource Locators (URL), December 1994, <http://www.faqs.org/rfcs/rfc1738.html>

IETF RFC 2616 HyperText Transfer Protocol HTTP/1.1


1795 Extensible Markup Language (XML) 1.0 (Second Edition). W3C Recommendation 6 October 2000. <http://www.w3.org/TR/REC-xml>.

Web Services Description Language (WSDL) 1.1. W3C Note 15 March 2001. <http://www.w3.org/TR/wsdl>.

1800 XHTML™ 1.0 The Extensible HyperText Markup Language (Second Edition). A Reformulation of HTML 4 in XML 1.0. W3C Recommendation 26 January 2000, revised 1 August 2002. <http://www.w3.org/TR/xhtml1>.

XHTML™ Basic. W3C Recommendation 19 December 2000. <http://www.w3.org/TR/xhtml-basic>.

<http://www.w3.org/TR/xhtml-basic> Interaction Diagram

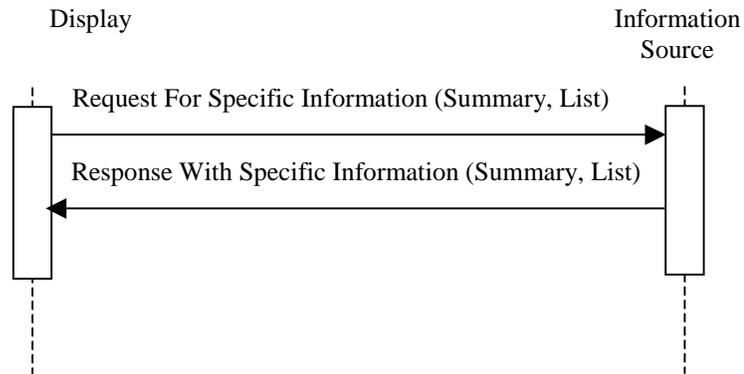

1805

**Figure 3.11-1: Request For Specific Information – Summary sequence**

### 3.11.3.1 Request For Specific Information - Summary

#### 3.11.3.1.1 Trigger Events

1810 The following event will trigger a Request for Specific Information:

- User of the Display Actor needs to review a summary list of information/ reports that are part of a patient’s clinical history (i.e., summary of lab reports, summary of radiology exam reports, etc.) with the intent of selecting a specific item off the list for subsequent retrieval as a persistent object via the Retrieve Document for Display Transaction

#### 1815 3.11.3.1.2 Message Semantics

The Retrieve Specific Information for Display transaction is performed by the invocation of a web service. The Display Actor shall generate a web service request whenever a user needs to review the information stored as part of a patient’s clinical history on the Information Source Actor.

1820 To specify the type of information that needs to be returned, a web service request shall include the following parameters (keys) to filter the subset of information (see Table 3.11.4-1). All parameter names and values (see Table 3.11.4-2) are case-sensitive.

**Table 3.11.4-1: Web Service Request Keys**

Parameter Name	REQ	Description	Notes
requestType	R	requestType specifies what type of information shall be retrieved. This parameter shall always be valued.	See Table 3.11.4-2 for the list of possible values.
patientID	R	This attribute identifies the subject of the results being queried for. Its value shall include identification of assigning authority.	PatientID value shall be formatted as HL7 CX data type (including assigning authority) according to the requirements specified for the Patient Identity Feed transaction (see Section 3.8.4.1.2.3)

Parameter Name	REQ	Description	Notes
lowerDateTime	O	Used to constrain the earliest date/time of creation of information.	This value shall be encoded in the XML primitive dateTime format.
upperDateTime	O	Used to constrain the latest date/time of creation of information.	This value shall be encoded in the XML primitive dateTime format.
mostRecentResults	R	The numeric value that indicates the number of most recent results to be included into the response, i.e., 1 indicates to provide the latest result.	Value of 0 indicates that all available results shall be returned.

1825

**Table 3.11.4-2: Web Service Request Types**

requestType value	Description
SUMMARY	Summary of all reports known to the Information Source
SUMMARY-RADIOLOGY	Summary of radiology reports
SUMMARY-CARDIOLOGY	Summary of cardiology reports
SUMMARY-LABORATORY	Summary of laboratory reports
SUMMARY-SURGERY	Summary of surgery reports
SUMMARY-EMERGENCY	Summary of emergency reports
SUMMARY-DISCHARGE	Summary of discharge reports
SUMMARY-ICU	Summary of intensive care reports
SUMMARY-RX	Summary of Prescriptions

Note: parameter values that contain reserved characters need to be encoded using %<hex><hex> notation. Reserved characters include slash (/, encode as %2f) and ampersand (&, encode as %26).

1830 Formal definition of the web service in WSDL is provided in ITI TF-2x: Appendix A.

The only binding required for both the Display Actor and Information Source Actor is the binding to the HTTP-GET. In this binding the sample message will be formatted as follows:

http://<location>/IHERetrieveSummaryInfo?requestType=SUMMARY&patientID=99998410^^%26www.mlhlife.com%26DNS &lowerDateTime=2003-01-

1835 01T00:00:00&upperDateTime=2003-01-01T23:59:59&mostRecentResults=1

The <location> part of the URL is configurable by the implementation, and must contain the host name, an optional port address, and may be followed by an optional path. The path if present may not contain a '?' character. The remainder of the URL, including IHERetrieveSummaryInfo and the following request parameters are specified by the WSDL and may not be changed.

1840 More specifically, using the definitions from RFC 1738, the <location> part of the URL must match the production for location from the figure below:

location	= hostport [ "/" hpath ]
hostport	= host [ ":" port ]
host	= hostname   hostnumber
hostname	= *[ domainlabel "." ] toplabel

1845

1850	domainlabel	= alphanumeric   alphanumeric *[ alphanumeric   "-" ] alphanumeric
	toplabel	= alpha   alpha *[ alphanumeric   "-" ] alphanumeric
	alphanumeric	= alpha   digit
	hostnumber	= digits "." digits "." digits "." digits
	port	= digits
1855	hpath	= hsegment *[ "/" hsegment ]
	hsegment	= *[ uchar   ";"   ":"   "@"   "&"   "=" ]
	lowalpha	= "a"   "b"   "c"   "d"   "e"   "f"   "g"   "h"   "i"   "j"   "k"   "l"   "m"   "n"   "o"   "p"   "q"   "r"   "s"   "t"   "u"   "v"   "w"   "x"   "y"   "z"
1860	hialpha	= "A"   "B"   "C"   "D"   "E"   "F"   "G"   "H"   "I"   "J"   "K"   "L"   "M"   "N"   "O"   "P"   "Q"   "R"   "S"   "T"   "U"   "V"   "W"   "X"   "Y"   "Z"
1865	alpha	= lowalpha   hialpha
	digit	= "0"   "1"   "2"   "3"   "4"   "5"   "6"   "7"   "8"   "9"
	safe	= "\$"   "-"   "_"   "."   "+"
	extra	= "!"   "*"   "'"   "("   ")"   ","
1870	hex	= digit   "A"   "B"   "C"   "D"   "E"   "F"   "a"   "b"   "c"   "d"   "e"   "f"
	escape	= "%" hex hex
	unreserved	= alpha   digit   safe   extra
	uchar	= unreserved   escape

1875

The following location values are legal according to this specification:

<location> value	Resulting URL
myhost	http://myhost/IHERetrieveSummaryInfo?...
myhost:8080	http://myhost:8080/IHERetrieveSummaryInfo?...
myhost/MyAspPageThatLooksLikeItCouldBeAFolder.aspx	http://myhost/MyAspPageThatLooksLikeItCouldBeAFolder.aspx/IHERetrieveSummaryInfo?...
myhost:8080/MyAspPageThatLooksLikeItCouldBeAFolder.aspx	http://myhost:8080/MyAspPageThatLooksLikeItCouldBeAFolder.aspx/IHERetrieveSummaryInfo?...
myhost/MyJspPage.jsp	http://myhost/MyJspPage.jsp/IHERetrieveSummaryInfo?...
myhost:8080/MyJspPageThatLooksLikeItCouldBeAFolder.jsp	http://myhost:8080/MyJspPage.jsp/IHERetrieveSummaryInfo?...

The following location values are not legal:

<location> value	Resulting URL
My+Computer	'+' is not a legal character in a host name.
myhost:99999	99999 is not a valid port.
myhost/myPath.jsp?request=	'?' is not valid in a path.

1880 In addition, the Display Actor shall support the following field of the HTTP request:

**Table 3.11.4-3: HTTP Request and Response Fields**

HTTP Field	REQ	Description	Values
Accept-Language	O	This field restricts the set of natural languages that are preferred as a response to the request.	Any valid value according to RFC 2616

The Information Source Actor shall support the following field of the HTTP response.

1885

**Table 3.11.4-4: HTTP Response Fields**

HTTP Field	REQ	Description	Values
Expires	R	This field gives the date/time after which the response is considered stale	Shall be 0. This is now deprecated usage, but it is the widely supported means of specifying no caching.
Cache-Control	R	This field indicates that this response should not be cached.	Shall be no-cache

If necessary, the Display Actor may perform the request to the web service utilizing HTTPS protocol.

1890 Information Source Actors may return HTTP redirect responses (responses with values of 301, 302, 303 or 307) in response to a request. Display Actors can expect to receive an error response, or the data requested, or a request to look elsewhere for the data. A Display Actor must follow redirects, but if a loop is detected, it may report an error.

### 3.11.3.1.3 Expected Actions

1895 Upon reception of the Request for Specific Information, the Information Source Actor shall parse the request and if there are no errors, return the Response with Specific Information as specified in Section 3.11.4.2, and HTTP response code 200 - OK.

To specify the type of information that needs to be processed, an Information Source Actor shall support the following parameters (keys) to filter the subset of information (see Table 3.11.4-5).

1900

**Table 3.11.4-5: Web Service Request Keys**

Parameter Name	REQ	Description	Notes
requestType	R	requestType specifies what type of information shall be retrieved. This parameter shall always be valued.	See Table 3.11.4-2 for the list of possible values.

Parameter Name	REQ	Description	Notes
patientID	R	This attribute identifies the subject of the results being queried for. Its value shall include identification of assigning authority.	PatientID value shall be formatted as HL7 CX data type (including assigning authority) according to the requirements specified for the Patient Identity Feed transaction (see Section 3.8.4.1.2.3)
lowerDateTime	R	Used to constrain the earliest date/time of creation of information.	This value shall be encoded in the XML primitive dateTime format.
upperDateTime	R	Used to constrain the latest date/time of creation of information.	This value shall be encoded in the XML primitive dateTime format.
mostRecentResults	R	The numeric value that indicates the number of most recent results to be included into the response, i.e., 1 indicates to provide the latest result.	Value of 0 indicates that all available results shall be returned.

1905 If the requestType specified is not supported, the Information Source Actor shall return HTTP response-code 404 (not found) with the suggested reason-phrase “requestType not supported”. If the Information Source Actor is not able to format the document in any content types listed in the 'Accept' field, it shall return HTTP response code 406 – Not Acceptable.

1910 If the Patient ID specified by the Display Actor is not known to the Information Source Actor, it shall return HTTP response-code 404 (not found) with the suggested reason-phrase “Patient ID not found”. If the Display Actor provides the Patient ID from a different domain than the one the Information Source Actor belongs to, and the Information Source Actor is grouped with the Patient ID Consumer Actor, it may attempt to obtain a mapping of the provided Patient ID into its domain before responding.

Note: Other HTTP response codes may be returned by the Information Source Actor, indicating conditions outside of the scope of this profile, for example, 401 – Authentication Failed might be returned if Information Source Actor is grouped with the Kerberized Server Actor.

1915 Note: It is recommended that the Information Source Actor complement the returned error code with a human readable description of the error condition.

If an error condition cannot be automatically recovered, at a minimum, the error should be displayed to the user by the Display Actor.

1920 If lowerDateTime and/or upperDateTime parameters are specified, they shall define the lower and/or upper inclusive boundary of the temporal range in which returned information should have been created. The value of the mostRecentResults parameter shall be interpreted within such specified date/time range.

### 3.11.3.2 Response with Specific Information - Summary

#### 3.11.3.2.1 Trigger Events

1925 This message is sent by the Information Source Actor in response to the Request For Specific Information web service request.

### 3.11.3.2.2 Message Semantics

Information Source Actor shall support at least one of the values of the requestType parameter specified in Table 3.11.4-2.

1930 The Information Source shall set an expiration of zero to ensure no caching. The message shall be formatted using XHTML Basic and W3C HTML Compatibility Guidelines provided in the Appendix C of the W3C XHTML 1.0 Recommendation.

1935 The Display Actor may request the Information Source Actor to provide any specific information including a summary of reports of different types pertaining to a particular patient. The exact content of the summary is determined by the Information Source Actor and may be regulated by the institution policy. For example, it may contain the hyperlink to a persistent object so that it can be retrieved by using the Retrieve Document for Display Transaction. In the case of retrieving a summary of documents (requestType of SUMMARY[-xx]), it is strongly recommended to include a link to the relevant documents, for each item of the summary. If  
1940 present, the link will have to be formatted as a web service request in accordance to the requirements in Section 3.12. It may also contain a hyperlink representing the invocation of the Request for Specific Information for display, as specified in this Section.

### 3.11.3.2.3 Expected Actions

1945 The Display Actor shall render the received response for the user. It shall not assume that the content of the document may be meaningfully parsed beyond determination of XHTML tags necessary for accurate presentation of provided information.

1950 When the summary responses include links to documents or other specific information, Information Source Actors are strongly encouraged to format them according to the requirements stated in Section 3.11 and 3.12, to facilitate retrieval of information from other information sources.

## 3.11.3.3 Request For Specific Information - List

### 3.11.3.3.1 Trigger Events

The following event will trigger a Request for Specific Information:

- 1955 • User of the Display Actor needs to review a particular subset of information that is part of a patient's clinical history (i.e., lab report, radiology exam report, list of medications, etc.) that is stored on the Information Source system.

### 3.11.3.3.2 Message Semantics

1960 The Retrieve Specific Information for Display transaction is performed by the invocation of a web service. The Display Actor shall generate a web service request whenever a user needs to review the information stored as part of a patient's clinical history on the Information Source Actor.

To specify the type of information to be returned, a web service request shall include the following parameters (keys) to filter the subset of information (see Table 3.11.4-7). All parameter names and values (see Table 3.11.4-7) are case-sensitive.

1965

**Table 3.11.4-6: Web Service Request Keys**

Parameter Name	REQ	Description	Notes
requestType	R	requestType specifies what type of information shall be retrieved. This parameter shall always be valued.	See Table 3.11.4-7 for the list of possible values.
patientID	R	This attribute identifies the subject of the results being queried for. Its value shall include identification of assigning authority.	PatientID value shall be formatted as HL7 CX data type (including assigning authority) according to the requirements specified for the Patient Identity Feed transaction (see Section 3.8.4.1.2.3)

**Table 3.11.4-7: Web Service Request Types**

requestType value	Description
LIST-ALLERGIES	List of allergies and adverse reactions for a patient known to the Information Source
LIST-MEDS	List of medications currently taken by or administered to a patient

1970 Formal definition of the web service in WSDL is provided in the ITI TF-2x: Appendix A.

The only binding required for both Display Actor and Information Source Actor is the binding to the HTTP-GET. In this binding the sample message will be formatted as follows:

```
http://<location>/IHERetrieveListInfo?requestType=LIST-
MEDS&patientID=99998410^^^%26www.mlhlife.com%26DNS
```

1975 The <location> part of the URL is configurable by the implementation, and must contain the host name, an optional port address, and may be followed by an optional path. The path if present may not contain a '?' character. The remainder of the URL, including IHERetrieveListInfo and the following request parameters are specified by the WSDL and may not be changed. See the discussion about location in Section 3.11.4.1.2 Message Semantics above.

1980 In addition, the Display Actor shall support the following field of the HTTP request:

**Table 3.11.4-8: HTTP Request and Response Fields**

HTTP Field	REQ	Description	Values
Accept-Language	O	This field restricts the set of natural languages that are preferred as a response to the request.	Any valid value according to RFC 2616

The Information Source Actor shall support the following field of the HTTP response.

1985

**Table 3.11.4-9: HTTP Request Fields**

HTTP Field	REQ	Description	Values
Expires	R	This field gives the date/time after which the response is considered stale	Shall be 0. This is now deprecated usage, but it is the widely supported means of specifying no caching.
Cache-Control	R	This field indicates that this response should not be cached.	Shall be no-cache

If necessary, the Display Actor may perform the request to the web service utilizing HTTPS protocol.

1990 Information Source Actors may return HTTP redirect responses (responses with values of 301, 302, 303 or 307) in response to a request. Display Actors can expect to receive an error response, or the data requested, or a request to look elsewhere for the data. A Display Actor must follow redirects, but if a loop is detected, it may report an error.

### 3.11.3.3.3 Expected Actions

1995 Upon reception of the Request for Specific Information, the Information Source Actor shall parse the request and if there are no errors, shall return the Response with Specific Information as specified in Section 3.11.4.2, and HTTP response code 200 - OK.

2000 If the requestType specified is not supported, the Information Source Actor shall return HTTP response-code 404 (not found) with the suggested reason-phrase “requestType not supported”. If the Information Source Actor is not able to format the document in any content types listed in the 'Accept' field, it shall return HTTP response code 406 – Not Acceptable.

2005 If the Patient ID specified by the Display Actor is not known to the Information Source Actor, it shall return HTTP response-code 404 (not found) with the suggested reason-phrase “Patient ID not found”. If the Display Actor provides the Patient ID from a different domain than the one the Information Source Actor belongs to, and the Information Source Actor is grouped with the Patient ID Consumer Actor, it may attempt to obtain a mapping of the provided Patient ID into its domain before responding.

2010 Note: Other HTTP response codes may be returned by the Information Source Actor, indicating conditions outside of the scope of this profile, for example, 401 – Authentication Failed might be returned if Information Source Actor is grouped with the Kerberized Server Actor.

Note: It is recommended that the Information Source Actor complement returned error code with a human readable description of the error condition.

If an error condition cannot be automatically recovered, at a minimum, the error should be displayed to the user by the Display Actor.

2015 **3.11.3.4 Response with Specific Information - List**

**3.11.3.4.1 Trigger Events**

This message is sent by the Information Source Actor in response to the Request For Specific Information web service request.

**3.11.3.4.2 Message Semantics**

2020 Information Source Actor shall support at least one of the values of the requestType parameter specified in Table 3.11.4-7.

The Information Source shall set an expiration of zero to ensure no caching. The message shall be formatted using XHTML Basic and W3C HTML Compatibility Guidelines provided in the Appendix C of the W3C XHTML 1.0 Recommendation.

2025 The Display Actor may request the Information Source Actor to provide a list of information items (pertaining to a particular patient) that the Information Source has presently recorded. The exact content of the list is determined by the Information Source Actor.

The Display Actor shall not use the lowerDateTime, upperDateTime or mostRecentResults parameters in a query. The Information Source shall ignore them if they are specified.

2030 **3.11.3.4.3 Expected Actions**

The Display Actor shall render the received response for the user. It shall not assume that the content of the document may be meaningfully parsed beyond determination of XHTML tags necessary for accurate presentation of provided information.


### 3.12 Retrieve Document for Display [ITI-12]

2035 This section corresponds to Transaction ITI-12 of the IHE IT Infrastructure Technical Framework. Transaction ITI-12 is used by the Information Source and Display Actors.

#### 3.12.1 Scope

2040 This transaction involves the retrieval of a document (persistent object) for presentation purposes. The uniquely identifiable persistent object means that retrieving the same document instance at a different point in time will provide the same semantics for its presented content. The information content of the document is immutable even if the presentation of such content is provided with the use of different formats, stylesheets, etc.

#### 3.12.2 Use Case Roles

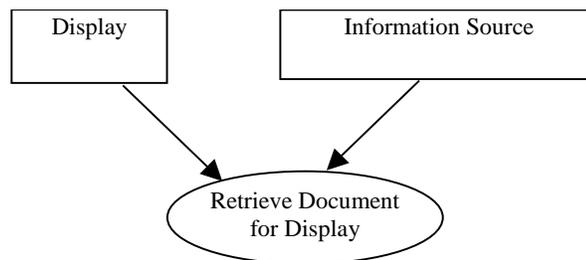

**Actor:** Display

**Role:** A system that requests a document/object for display, and displays it.

**Actor:** Information Source

2050 **Role:** A system that provides specific information in response to the request from the Display Actor, in a presentation-ready format.


#### 3.12.3 Referenced Standards

IETF RFC 2616 HyperText Transfer Protocol HTTP/1.1

2055 Extensible Markup Language (XML) 1.0 (Second Edition). W3C Recommendation 6 October 2000. <http://www.w3.org/TR/REC-xml>.

Web Services Description Language (WSDL) 1.1. W3C Note 15 March 2001. <http://www.w3.org/TR/wsdl>.

### 3.12.4 Interaction Diagram

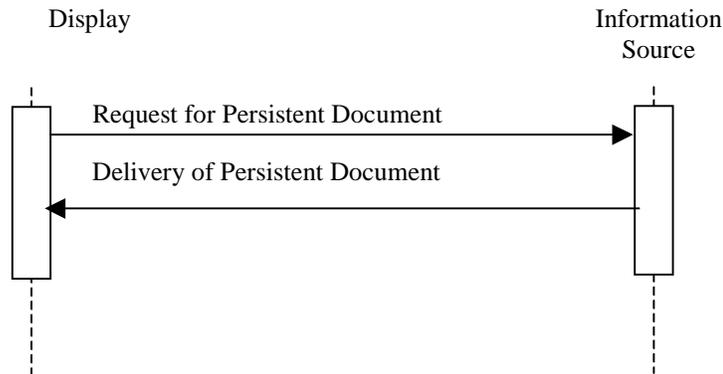

2060

**Figure 3.12-1: Request for Persistent Document Sequence**

#### 3.12.4.1 Request for Persistent Document

##### 3.12.4.1.1 Trigger Events

The request for a document is triggered when a user of the Display Actor needs to review a particular document that is stored by the Information Source Actor.

2065

##### 3.12.4.1.2 Message Semantics

The Retrieve Document for Display transaction is performed by the invocation of a web service. The Display Actor shall generate the web service request whenever a user needs to review the document stored as part of a patient’s clinical history on the Information Source Actor.

The web service request shall include the following parameters (keys) to identify the document to be returned and its format (see Table 3.12.4-1). All parameter names and values are case-sensitive.

2070

**Table 3.12.4-1: Query Keys**

Parameter Name	REQ	Description	Values
requestType	R	This parameter is required to have a value of DOCUMENT.	DOCUMENT
documentUID	R	Identifies document’s UID as known to both actors.	This value shall be a properly defined Object identifier (OID) as specified in ITI TF-2x: Appendix B.
preferredContentType	R	This parameter is required to identify the preferred format the document is to be provided in (as MIME content type).	Display may specify one of the following formats: image/jpeg application/x-hl7-cda-level-one+xml (see note) application/pdf (see note)

2075

Note: see IANA registry for details about hl7-cda-level-one and PDF, such as version. Applications creating PDF may use this MIME type for other versions of PDF up to 1.3. Receivers shall support document encoded in this version and previous versions.

Note: see HL7 CDA<sup>3</sup> framework release 1.0 for details about application/x-hl7-cda-level-one+xml.

- 2080 Formal definition of the web service in WSDL is provided in ITI TF-2x: Appendix A.  
 The only binding required for both the Display Actor and Information Source Actor is the binding to the HTTP-GET. In this binding the sample message will be formatted as follows:  
 http://<location>/IHERetrieveDocument?requestType=DOCUMENT&documentUID=1.2.3&preferredContentType=application%2fpdf
- 2085 The <location> part of the URL is configurable by the implementation, and must contain the host name, an optional port address, and may be followed by an optional path. The path if present may not contain a ‘?’ character. The remainder of the URL, including IHERetrieveDocument and the following request parameters are specified by the WSDL and may not be changed. See the discussion about location in Section 3.11.4.1.2 Message Semantics above.
- 2090 In addition, the Display Actor shall support the following fields of the HTTP request:

**Table 3.12.4-3: HTTP Request and Response Fields**

HTTP Field	REQ	Description	Values
Accept	O	This field may be used to specify certain media types which are acceptable for the response	At least one of the following values: image/jpeg application/x-hl7-cda-level-one+xml application/pdf */*
Accept-Language	O	This field is similar to Accept, but restricts the set of natural languages that are preferred as a response to the request.	Any valid value according to RFC 2616
Expires	R	This field gives the date/time after which the response is considered stale	Any valid value according to RFC 2616, or 0

The Information Source Actor shall support the following field of the HTTP response.

2095

**Table 3.12.4-4: HTTP Response Fields**

HTTP Field	REQ	Description	Values
Expires	R	This field gives the date/time after which the response is considered stale	Any valid value according to RFC 2616, or 0

The Display Actor may provide list of content types it supports in the HTTP Accept field. If the HTTP Accept Field is absent, it means that any content type is acceptable by the Display Actor.

<sup>3</sup> CDA is the registered trademark of Health Level Seven International.

2100 The preferredContentType parameter shall specify the content type desired by the Display Actor. The value of the preferredContentType parameter of the request shall be one of the values from the Table 3.12.4-1 and shall not contradict values specified in the HTTP Accept field.

The Information Source shall provide info in preferredContentType if capable, otherwise it shall only use a type specified in the Accept Field as appropriate given the information to be returned.

2105 If necessary, the Display Actor may perform the request to the web service utilizing HTTPS protocol.

Information Source Actors may return HTTP redirect responses (responses with values of 301, 302, 303 or 307) in response to a request. Display Actors can expect to receive an error response, or the data requested, or a request to look elsewhere for the data. A Display Actor must follow redirects, but if a loop is detected, it may report an error.

### 2110 **3.12.4.1.3 Expected Actions**

Upon reception of the Request for Specific Information, the Information Source Actor shall parse the request and shall return the retrieved document as specified in Section 3.12.4.2, and HTTP response code 200 - OK.

2115 If the requestType specified is a not a legal value according to this profile, the Information Source Actor shall return HTTP response-code 403 (forbidden) with the suggested reason-phrase “requestType not supported”.

If the Information Source Actor is not able to format the document in any content types listed in the 'Accept' field, it shall return HTTP response code 406 – Not Acceptable.

2120 If the specified documentUID is not known to the Information Source Actor, it shall return HTTP response-code 404 (not found) with the suggested reason-phrase “Document UID not found”.

If the documentUID, preferredContentType or requestType parameters are missing, the Information Source Actor shall return HTTP response code 400 - Bad Request.

2125 If the documentUID or preferredContentType parameters are malformed, the Information Source Actor shall return HTTP response code 400 - Bad Request.

If the specified preferredContentType is not consistent with the setting of the HTTP Accept field, the Information Source Actor shall return HTTP response code 400 – Bad Request.

2130 Note: Other HTTP response codes may be returned by the Information Source Actor, indicating conditions outside of the scope of this profile, for example, 401 – Authentication Failed might be returned if Information Source Actor is grouped with the Kerberized Server Actor.

Note: It is recommended that the Information Source Actor complement returned error code with a human readable description of the error condition.

If an error condition cannot be automatically recovered, at a minimum, the error should be displayed to the user by the Display Actor.

2135 **3.12.4.2 Delivery of Persistent Document**

**3.12.4.2.1 Trigger Events**

2140 The Delivery of Persistent Document message is the transmission of the requested document in specified format from the Information Source Actor to the Display Actor. This transmission will happen if such document, identified by the documentUID parameter in the request, has been successfully located by the Information Source Actor.

**3.12.4.2.2 Message Semantics**

In response to the request from the Display Actor, the Information Source Actor shall format the document according to the preferredContentType specified, and return it in the HTTP response. See Section 3.12.4.1.2 for a discussion of the rules related to preferredContentType.

2145 The Information Source Actor shall maintain global uniqueness of object identifiers.

The Information Source Actor shall set an expiration date compatible with the policies associated with the possible removal of instances of persistent documents (no more than a week).

**3.12.4.2.3 Expected Actions**

The Display Actor shall render the received document for the user.

2150 **3.13 Follow Context [ITI-13]**

This section corresponds to Transaction ITI-13 of the IHE IT Infrastructure Technical Framework. Transaction ITI-13 is used by the Patient Context Participant, User Context Participant and Context Manager Actors.

**3.13.1 Scope**

2155 This transaction allows the Context Manager Actor to force other context participant actors to synchronize based on the new context values.


2160 This transaction is composed of multiple methods as defined by the *HL7 Context Management “CCOW” Standard*. It has multiple phases consisting of surveying the participants, indication to them of final decision as to whether the context changed or not, and retrieval of the new context values by the context participants.

Each of the context participant actors follows a specific subject. The Patient Context Participant Actor follows the patient subject and does not expect the user subject to be set in context. The User Context Participant follows the user subject.

2165 The semantics of the methods used are defined in the documents HL7 Context Management “CCOW” Standard: Component Technology Mapping: ActiveX or HL7 Context Management “CCOW” Standard: Component Technology Mapping: Web, in conjunction with the HL7 Context Management “CCOW” Standard: Subject Data Definitions document. A Context Participant Actor can implement either technology. The Context Manager Actor shall support both technologies in order to interoperate with joining participants implementing the technology of their choice.

2170

### 3.13.2 Use Case Roles

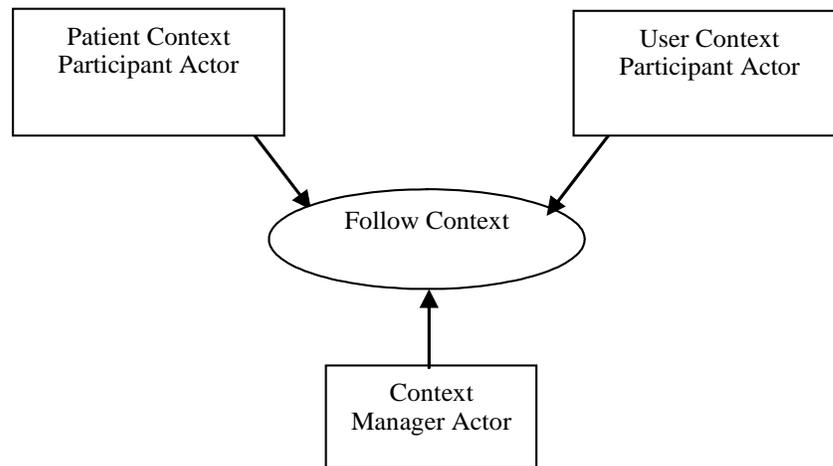

**Actor:** Patient Context Participant

2175 **Role:** Responds to context survey. Synchronizes display to new value(s) in the patient subject of a context it follows.

**Actor:** User Context Participant

**Role:** Responds to context survey. Synchronizes display to new value(s) in the patient subject of a context it follows.

**Actor:** Context Manager


2180 **Role:** Conducts context survey, notifies the context participants of acceptance or cancellation of a change, and provides context values.

### 3.13.3 Referenced Standard

HL7 Context Management “CCOW” Standard, Version 1.4

2185 Technology and Subject Independent Architecture  
Component Technology Mapping: ActiveX  
Component Technology Mapping: Web  
Subject Data Definitions

### 3.13.4 Interaction Diagram

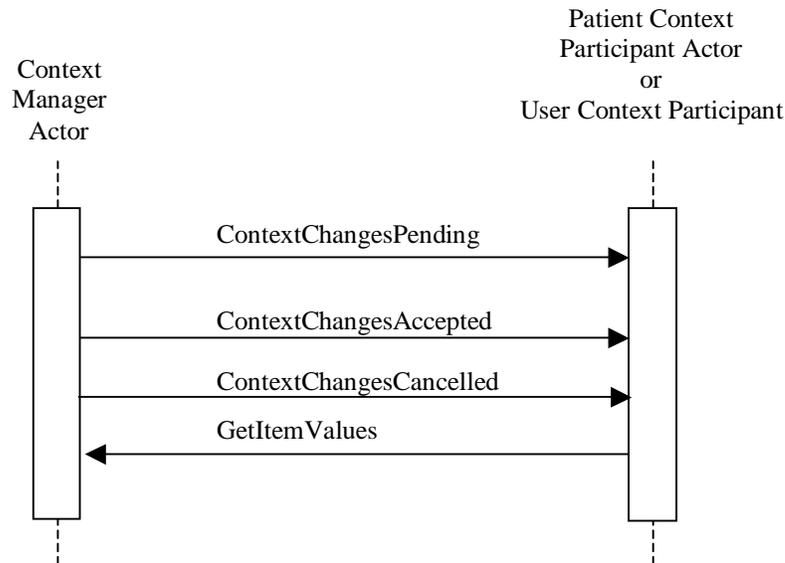

2190

**Figure 3.13-1: Follow Context – ContextChangesPending Method Sequence**

#### 3.13.4.1 Follow Context – ContextChangesPending Method

The ContextChangesPending method is invoked by the Context Manager Actor to survey context participant actors with regard to acceptability of changes proposed by a Patient Context Participant or Client Authentication Agent Actors.

2195

##### 3.13.4.1.1 Trigger Events

The ContextChangesPending method is triggered when the Context Manager receives invocation of the EndContextChanges method.

##### 3.13.4.1.2 Message Semantics

ContextChangesPending is defined as a method on the ContextParticipant interface and allows the Context Manager to survey a context participant as to whether or not it is ready to follow the changes in the context.

2200

In the invocation of this method, the Context Manager shall provide the pending context's coupon.

2205

Refer to the *HL7 Context Management “CCOW” Standard: Technology and Subject-Independent Architecture* document, Section 17.3.7.2, for a description of the parameters associated with this method.

##### 3.13.4.1.3 Expected Actions

Performing the ContextChangesPending method, the Patient Context Participant or User Context Participant Actor makes a decision whether or not it can accept change of context (for example

2210

due to operation being in progress). To reach this decision, it may invoke the `GetItemValues` method to inspect proposed new values in the context.

2215 As a response, a Context Participant Actor will respond with an indication to Accept or Conditionally Accept the proposed change. Refer to the *HL7 Context Management “CCOW” Standard: Technology and Subject-Independent Architecture* document, Section 17.3.7.2, for the specifics of the response formation.

### **3.13.4.2 Follow Context – ContextChangesAccepted Method**

The `ContextChangesAccepted` method is invoked by the Context Manager Actor to confirm to the context participants that instigator of change accepted proposed changes.

#### **2220 3.13.4.2.1 Trigger Events**

The `ContextChangesAccepted` method is triggered when the Context Manager receives invocation of the `PublishChangesDecision` method indicating that the changes have been accepted.

#### **3.13.4.2.2 Message Semantics**

2225 `ContextChangesAccepted` is defined as a method on the `ContextParticipant` interface and allows the Context Manager to inform a context participant that the context value(s) have been changed.

In the invocation of this method, the Context Manager provides the new context coupon.

2230 Refer to the *HL7 Context Management “CCOW” Standard: Technology and Subject-Independent Architecture*, Section 17.3.7.3 for a description of the parameters associated with this method.

#### **3.13.4.2.3 Expected Actions**

Performing the `ContextChangesAccepted` method, the Patient Context Participant or User Context Participant Actor accepts new context and can subsequently retrieve new values using the `GetItemValues` method.

2235 It responds with confirmation of success or an exception. Refer to the *HL7 Context Management “CCOW” Standard: Technology and Subject-Independent Architecture* document, Section 17.3.7.3, for the specifics of the response formation.

### **3.13.4.3 Follow Context – ContextChangesCancelled Method**

2240 The `ContextChangesCancelled` method is invoked by the Context Manager Actor to inform the context participants that instigator of change cancelled proposed changes.

#### **3.13.4.3.1 Trigger Events**

The `ContextChangesCancelled` method is triggered when the Context Manager receives invocation of the `PublishChangesDecision` method indicating that the changes have been cancelled.

2245 **3.13.4.3.2 Message Semantics**

ContextChangesCancelled is defined as a method on the ContextParticipant interface and allows the Context Manager inform a context participant that the pending context change has been cancelled.

In the invocation of this method, the Context Manager provides the pending context's coupon.

2250 Refer to the *HL7 Context Management "CCOW" Standard: Technology and Subject-Independent Architecture*, Section 17.3.7.4 for a description of the parameters associated with this method.

**3.13.4.3.3 Expected Actions**

2255 Performing the ContextChangesCancelled method, the Patient Context Participant or User Context Participant Actor keeps its current context and destroys information about a pending context change that has been cancelled.

It responds with confirmation of success or an exception. Refer to the *HL7 Context Management "CCOW" Standard: Technology and Subject-Independent Architecture* document, Section 17.3.7.4, for the specifics of the response formation.

2260 **3.13.4.4 Follow Context – GetItemValues Method**

The GetItemValues method is invoked by a Context Participant Actor to retrieve value(s) from the context it follows.

**3.13.4.4.1 Trigger Events**

2265 The GetItemValues method is triggered by a Context Participant Actor after it receives the context coupon as a result of the ContextChangesPending, ContextChangesAccepted or GetContextCoupon methods.

**3.13.4.4.2 Message Semantics**

2270 GetItemValues is defined as a method on the ContextData or SecureContextData interface. If the context is not secured when a participant actor has joined the context (i.e., Patient Context Participant that only follows patient context), then this method should be invoked on the ContextData interface. Otherwise, it shall be invoked on the SecureContextData interface.

2275 By invocation of this method without specification of the list of item names, a context participant retrieves values of all items presently set in context. It can also first invoke the GetItemNames method on the same interface (as specified in CCOW Standard) and use the list of items for selective retrieval of item values from the context via GetItemValues method. The Patient Context Participant needs to search through the resulting list of Patient.Id.IdList.<n> values until a recognized Patient Domain is found. The Patient Context Participant may choose to be grouped with a PIX Patient Identifier Cross-reference Consumer to handle the cases where no known Patient Domain is found in the resulting IdList.

2280 Refer to the *HL7 Context Management "CCOW" Standard: Technology and Subject-Independent Architecture* document, Section 17.3.4.5, for the Patient Context Participant Actor,

and Section 17.3.13.2, for the User Context Participant, for a description of parameters associated with this method.

#### **3.13.4.4.3 Expected Actions**

2285 Context Manager shall return the values of requested items or an exception. Refer to the *HL7 Context Management “CCOW” Standard: Technology and Subject-Independent Architecture document*, Section 17.3.4.5, for the Patient Context Participant Actor, and Section 17.3.13.2, for the User Context Participant, for a description of the response issued by the Context Manager Actor.

#### **2290 3.14 Register Document Set [ITI-14]**

This transaction has been retired in favor of [ITI-42] Register Document Set-b.

#### **3.15 Provide and Register Document Set [ITI-15]**

This transaction has been retired in favor of [ITI-41] Provide and Register Document Set-b.

#### **3.16 Query Registry [ITI-16]**

2295 This transaction has been retired in favor of [ITI-18] Registry Stored Query.

#### **3.17 Retrieve Documents [ITI-17]**

This transaction has been retired in favor of [ITI-43] Retrieve Document Set.

#### **3.18 Registry Stored Query [ITI-18]**

2300 This section corresponds to Transaction ITI-18 of the IHE Technical Framework. Transaction ITI-18 is used by the Document Registry and Document Consumer Actors.

Actors that support the Asynchronous Web Services Exchange Option and implement the Registry Stored Query transaction shall support the following:

- Document Consumer Actor shall support Asynchronous Web Services Exchange for the Registry Stored Query [ITI-18] and Retrieve Document Set [ITI-43] transactions
- Document Registry Actor shall support Asynchronous Web Services Exchange for the Registry Stored Query [ITI-18] and Register Document Set – b [ITI-42] transactions

Refer to section ITI TF-2x: V.5 Synchronous and Asynchronous Web Services Exchange for an explanation of Asynchronous Web Services Exchange.

##### **3.18.1 Scope**

2310 The Registry Stored Query transaction supports a variety of types of queries. Examples include the following:

Query by patient (Id) for a time interval, by document type(s), by practice setting(s), by author person

Query by Document Source

- 2315 Query for XDS Folders updated during a time interval
- Query for all documents in a Folder or Submission Set
- Query by time of submission


The list of XDS registry entries attributes that can be the target of a query are defined in ITI TF-3: 4.1.7 through 4.1.9. This transaction will document the basic syntax and semantics of XDS Document Registry queries.

2320

All queries return:

- Metadata for one or more registry objects, or
- Object references for one or more registry objects (registry UUIDs).

**3.18.2 Use Case Roles**

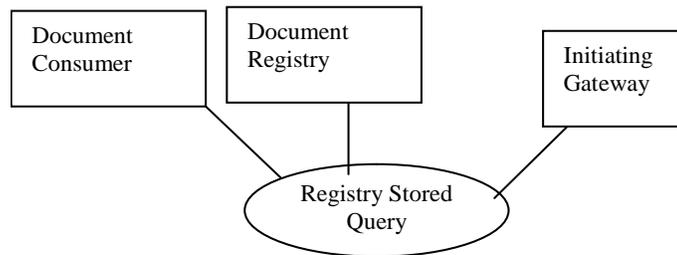

2325

**Actor:** Document Consumer

**Role:** Requests a query by identifier (UUID), and passes parameters to the query. A parameter controlling the format of the returned data is passed, it selects either object references or full objects.

2330

**Actor:** Document Registry

**Role:** Services the query using its stored definitions of the queries defined for XDS.

**Actor:** Initiating Gateway

**Role:** Services the stored query by initiating transactions with a selected set of Responding Gateways, Document Registries or other appropriate systems.

2335

**3.18.3 Referenced Standards**


ITI TF-3:4 Metadata used in Document Sharing Profiles.

Implementors of this transaction shall comply with all requirements described in ITI TF-2x: Appendix V: Web Services for IHE Transactions.

2340

- ebRIM      OASIS/ebXML Registry Information Model v3.0
- ebRS      OASIS/ebXML Registry Services Specifications v3.0

### 3.18.4 Interaction Diagram

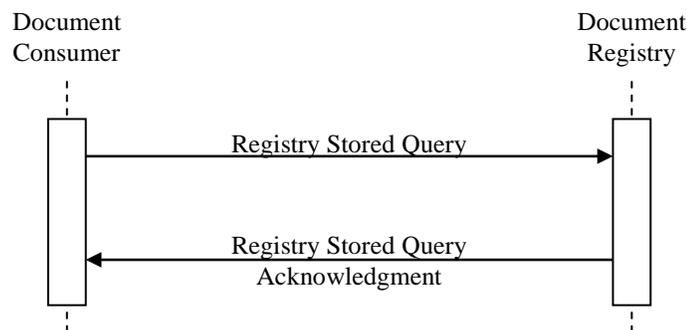

#### 2345 3.18.4.1 Registry Stored Query

This is a query request to the Document Registry from a Document Consumer. The query request contains:

- A reference to a pre-defined query stored on the Document Registry Actor.
- Parameters to the query. The query parameters are matched up with the query variables defined in the query definition on the Document Registry Actor.

2350

##### 3.18.4.1.1 Trigger Events

This message is initiated when the Document Consumer wants to query/retrieve document metadata.

##### 3.18.4.1.2 Message Semantics

2355 The semantics of Stored Query are defined in Section 6.3. *Stored Query Support* of ebRS version 3.0. This transaction corresponds to Section 6.3.2 *Invoking a Stored Query* and 6.3.3 *Response to a Stored Query Invocation*. This profile does not specify how the queries come to be stored in the Registry Actor nor how they are to be translated for other database architectures.

##### 3.18.4.1.2.1 Version 3.0 ebXML Registry Standard

2360 This transaction uses ebXML Registry version 3.0.

##### 3.18.4.1.2.2 Sample Query Request

The sample query is included under the Section 3.18.4.1.3 Expected Actions.

##### 3.18.4.1.2.3 Query Request Parameters – Coding Style

2365 The ebXML Registry stored query facility (Invoke Stored Query transaction) accepts the following parameters:

- returnType – ‘LeafClass’ or ‘ObjectRef’
- Query ID – a UUID from the Stored Query IDs Section 3.18.4.1.2.4 below

- Query Parameters – as defined in the Query Parameters Section 3.18.4.1.2.3.7 below

#### 3.18.4.1.2.3.1 Parameter returnType

2370 Registry Stored Query supports the following values for the parameter returnType:

- ObjectRef – a list of object UUIDs (references)
- LeafClass – list of XML elements representing the leaf class of the object returned

2375 The 'LeafClass' returnType is meant for returning a small amount of fully specified ebXML objects (such as a list of ExtrinsicObject (XDSDocumentEntry) elements with full contents: slots, external identifiers, classifications etc.). This type of query result is self-contained, everything known about the object(s) is returned. The specific query documented in this section describes which object types will be included. ObjectRef elements are also returned. These represent objects not included in the returned object list that are referenced by objects in the returned object list. These ObjectRefs are optional by the registry standard version 3.0.

2380 The 'ObjectRef' returnType returns references to the registry objects that match the query. This type query is recommended when the returned object list could be large. An initial query returning ObjectRefs for all objects of interest followed by secondary queries requesting full metadata (query type LeafClass) is an efficient way to query for large bodies of metadata. This strategy is particularly easy to use when querying for a single object type (XDSDocumentEntry or XDSSubmissionSet are examples) since only a single object type is involved.

2385 An ObjectRef looks like:

```
<ObjectRef id="urn:uuid:58a6f841-87b3-4a3e-92fd-a8ffeff98427" />
```

#### 3.18.4.1.2.3.2 Parameter Query ID

2390 This parameter holds the UUID assigned to the query to be invoked. UUIDs are assigned by this profile (see Section 3.18.4.1.2.4) to each of the queries defined in Section 3.18.4.1.2.3.7.

#### 3.18.4.1.2.3.3 Date/Time Coding

All Date/time values are to be inclusive, interpreted as:

```
$XDSDocumentEntryCreationTimeFrom <= XDSDocumentEntry.creationTime <  
$XDSDocumentEntryCreationTimeTo
```

2395 for example.

The 'From' time or the 'To' time may be omitted.

#### 3.18.4.1.2.3.3.1 Comparing serviceStartTime and serviceStopTime

2400 Special consideration is needed when processing the query parameters related to serviceStartTime and serviceStopTime since these DocumentEntry metadata attributes may not be present:

- If the DocumentEntry.serviceStartTime attribute of a DocumentEntry contains no value and if the query includes a value for \$XDSDocumentEntryServiceStartTimeFrom or

\$XDSDocumentEntryServiceStartTimeTo, those query parameters shall not be used for deciding whether this DocumentEntry matches the query.

- 2405
- If the DocumentEntry.serviceStopTime attribute of a DocumentEntry contains no value and if the query includes a value for \$XDSDocumentEntryServiceStopTimeFrom or \$XDSDocumentEntryServiceStopTimeTo, those query parameters shall not be used for deciding whether this DocumentEntry matches the query.

#### **3.18.4.1.2.3.4 Coding of Code/Code-Scheme**

2410 When specifying a coded value parameter, an abbreviated form of the HL7 V2.5 CE format shall be used. Only the first (identifier) and third (coding scheme) elements shall be specified. Both are required. The second element shall be empty. The HL7 V2.5 length limits shall not apply. The eBRIM limit on Slot Value size does apply. An example of this format is:

code^^coding-scheme

2415 This style parameter always accepts multiple values so example codings in context look like:

<Value>('code1^^coding-scheme1')</Value>

or

<Value>('code1^^coding-scheme1','code2^^coding-scheme2')</Value>

within the parameter Slot.

#### **3.18.4.1.2.3.5 Coding of Single/Multiple Values**

Single values are coded as

- 2425
- 123 - without quotes for numbers
  - 'urn:oasis:names:tc:ebxml-regrep:StatusType:Approved' - in single quotes for strings.
  - 'Children's Hospital' – a single quote is inserted in a string by specifying two single quotes

Within the LIKE predicate

- Underscore ('\_') matches an arbitrary character
- Percent ('%') matches an arbitrary string

Format for multiple values is

- 2430
- (value, value, value, ...)

OR

- (value) if only one value is to be specified.

where each value is coded as described above for single values.

2435 When coding multiple values there is a potential conflict between needing to code a long list of values and the length restriction imposed by Schema on the size of the value of the <Value/>

element. Slot values shall never exceed the Schema-enforced limit. Therefore, the use of multiple Value elements within the Slot shall be acceptable. Splits may occur only between values, where each Value element is surrounded by parentheses. The following example shows multiple values, split across multiple Value elements:

```
2440 <Slot name="$uuid">
      <ValueList>
        <Value>('urn:uuid:a96d7361-6617-488a-891c-ee3f37d1f218','urn:uuid: 5655a680-1b6a-
11dd-bd0b-0800200c9a66')</Value>
        <Value>('urn:uuid:ae315e81-2056-4829-a5b4-cf9531941f96')</Value>
2445 </ValueList>
</Slot>
```

This example shall be treated as equivalent to:

```
<Slot name="$uuid">
  <ValueList>
2450 <Value>('urn:uuid:a96d7361-6617-488a-891c-ee3f37d1f218','urn:uuid: 5655a680-1b6a-
11dd-bd0b-0800200c9a66','urn:uuid:ae315e81-2056-4829-a5b4-cf9531941f96')</Value>
  </ValueList>
</Slot>
```

2455 Character comparisons shall be performed in accordance with the rules in ITI TF-2x: Appendix F Character String Comparisons.

And/or semantics for the coding of parameters shall be available only on parameters for multi-valued metadata elements (such as \$XDSDocumentEntryEventCodeList). Multi-valued parameters shall be coded in two ways with different interpretations.

2460 A parameter specified as a Slot with multiple values shall be interpreted as disjunction (OR semantics). For example:

```
2465 <rim:Slot name="$XDSDocumentEntryEventCodeList">
  <rim:ValueList>
    <rim:Value>('a')</rim:Value>
    <rim:Value>('b')</rim:Value>
  </rim:ValueList>
</rim:Slot>
```

2470 shall match an XDSDocumentEntry object with an eventCodeList attribute containing either 'a' or 'b'. The following coding of the parameter shall yield the same results:

2475

```
<rim:Slot name="$XDSDocumentEntryEventCodeList">
  <rim:ValueList>
    <rim:Value>('a','b')</rim:Value>
  </rim:ValueList>
</rim:Slot>
```

A parameter specified as multiple Slots shall be interpreted as conjunction (AND semantics). For example:

2480

```
<rim:Slot name="$XDSDocumentEntryEventCodeList">
  <rim:ValueList>
    <rim:Value>('a')</rim:Value>
  </rim:ValueList>
</rim:Slot>
<rim:Slot name="$XDSDocumentEntryEventCodeList">
  <rim:ValueList>
    <rim:Value>('b')</rim:Value>
  </rim:ValueList>
</rim:Slot>
```

2485

2490

shall match an XDSDocumentEntry object with an eventCodeList attribute containing both 'a' and 'b'.

Furthermore, the following specification of the \$XDSDocumentEntryEventCodeList parameter:

2495

```
<rim:Slot name="$XDSDocumentEntryEventCodeList">
  <rim:ValueList>
    <rim:Value>('a','b')</rim:Value>
  </rim:ValueList>
</rim:Slot>
<rim:Slot name="$XDSDocumentEntryEventCodeList">
  <rim:ValueList>
    <rim:Value>('c')</rim:Value>
  </rim:ValueList>
</rim:Slot>
```

2500

2505

shall be interpreted as matching a document having eventCode (a OR b) AND c.

### 3.18.4.1.2.3.6 Valid Document Status Values

The Registry Object status values, in ebRIM v 3.0 format, used by XDS are:

2510

```
urn:oasis:names:tc:ebxml-regrep:StatusType:Approved
urn:oasis:names:tc:ebxml-regrep:StatusType:Deprecated
```

If the Document Registry receives in a Registry Stored Query transaction a value for the \$XDSDocumentEntryStatus parameter that it does not understand then the Document Registry shall ignore the value and process the Registry Stored Query transaction as if the not understood value were not specified. This means that if the only value present is one that is not understood an error will be generated because the \$XDSDocumentEntryStatus parameter is required.

2515

#### 3.18.4.1.2.3.6.1 Valid AdhocQueryResponse Status Values

The status attribute of AdhocQueryResponse shall contain one of the following values:

urn:oasis:names:tc:ebxml-regrep:ResponseStatusType:Success

urn:ihe:iti:2007:ResponseStatusType:PartialSuccess

2520

urn:oasis:names:tc:ebxml-regrep:ResponseStatusType:Failure

See ITI TF-3: 4.2.4 Error Reporting for the interpretation of these values.

### 3.18.4.1.2.3.6.2 Valid DocumentEntryType Parameter Values

The objectType attribute on an ExtrinsicObject (DocumentEntry) is used to distinguish Stable DocumentEntries from On-Demand DocumentEntries. The following objectType values are used:

2525

- urn:uuid:7edca82f-054d-47f2-a032-9b2a5b5186c1 – Stable
- urn:uuid:34268e47-fdf5-41a6-ba33-82133c465248 – On-Demand

The valid DocumentEntryType parameter values used in the Registry Stored Query are:

2530

- urn:uuid:7edca82f-054d-47f2-a032-9b2a5b5186c1 – requests Stable Document Entries be included in the response. This is the default value.
- urn:uuid:34268e47-fdf5-41a6-ba33-82133c465248 – requests On-Demand Document Entries be included in the response. Used only by Document Consumers which support the On-Demand Documents Option.

2535

If no value is specified for DocumentEntryType, the value requesting only Stable Document Entries shall be assumed. To get all Document Entry types, the query shall contain both of the valid values in the request.

### 3.18.4.1.2.3.7 Parameters for Required Queries

2540

The sections below document the queries defined in the Registry Stored Query transaction [ITI-18]. These sections document a collection of Stored Queries. Document Registry Actors implementing this transaction shall support all queries in this collection and all parameters defined for each query. Document Consumer Actors implementing this transaction shall implement one or more of these queries as needed to support the use cases it implements.

Note that dollar sign (\$) prefix on query parameters is required by ebRS 3.0.

2545

In the query parameter tables below, each row represents a query parameter. Optional parameters which are not included in the query invocation have no effect on the query. Queries return registry objects that match all the supplied parameters. When multiple values are included for a parameter, objects are returned that match any included value (within the context of the larger query).

#### 3.18.4.1.2.3.7.1 FindDocuments

2550

Find documents (XDSDocumentEntry objects) in the registry for a given patientID with a matching 'status' attribute. The other parameters can be used to restrict the set of XDSDocumentEntry objects returned.

**Returns:** XDSDocumentEntry objects matching the query parameters

Parameter Name	Attribute	Opt	Mult
\$XDSDocumentEntryPatientId	XSDDocumentEntry. patientId	R	--
\$XDSDocumentEntryClassCode <sup>1</sup>	XSDDocumentEntry. classCode	O	M
\$XDSDocumentEntryTypeCode <sup>1</sup>	XSDDocumentEntry. typeCode	O	M
\$XDSDocumentEntryPracticeSettingCode <sup>1</sup>	XSDDocumentEntry. practiceSettingCode	O	M
\$XDSDocumentEntryCreationTimeFrom <sup>6</sup>	Lower value of XSDDocumentEntry. creationTime	O	--
\$XDSDocumentEntryCreationTimeTo <sup>6</sup>	Upper value of XSDDocumentEntry. creationTime	O	--
\$XDSDocumentEntryServiceStartTimeFrom	Lower value of XSDDocumentEntry. serviceStartTime	O	--
\$XDSDocumentEntryServiceStartTimeTo	Upper value of XSDDocumentEntry. serviceStartTime	O	--
\$XDSDocumentEntryServiceStopTimeFrom	Lower value of XSDDocumentEntry. serviceStopTime	O	--
\$XDSDocumentEntryServiceStopTimeTo	Upper value of XSDDocumentEntry. serviceStopTime	O	--
\$XDSDocumentEntryHealthcareFacilityTypeCode <sup>1</sup>	XSDDocumentEntry. healthcareFacilityTypeCode	O	M
\$XDSDocumentEntryEventCodeList <sup>1</sup>	XSDDocumentEntry. eventCodeList <sup>3</sup>	O	M
\$XDSDocumentEntryConfidentialityCode <sup>1</sup>	XSDDocumentEntry. confidentialityCode <sup>3</sup>	O	M
\$XDSDocumentEntryAuthorPerson <sup>4</sup>	XSDDocumentEntry. author	O	M
\$XDSDocumentEntryFormatCode <sup>1</sup>	XSDDocumentEntry. formatCode	O	M
\$XDSDocumentEntryStatus	XSDDocumentEntry. status	R	M
\$XDSDocumentEntryType <sup>5</sup>	XSDDocumentEntry. objectType	O	M

2555 <sup>1</sup>Shall be coded according to specification in Section 3.18.4.1.2.3.4 Coding of Code/Code-Scheme.

<sup>3</sup>Supports AND/OR semantics as specified in Section 3.18.4.1.2.3.5.

2560 <sup>4</sup>The value for this parameter is a pattern compatible with the SQL keyword LIKE which allows the use of the following wildcard characters: % to match any (or no) characters and \_ to match a single character. The match shall be applied to the text contained in the Value elements of the authorPerson Slot on the author Classification (value strings of the authorPerson sub-attribute)

<sup>5</sup> See Section 3.18.4.1.2.3.6.2

<sup>6</sup> CreationTimeFrom and CreationTimeTo are ignored when evaluating an On-Demand Document Entry's selection for inclusion in the query response.

2565 **3.18.4.1.2.3.7.2 FindSubmissionSets**

Find submission sets (XDSSubmissionSet objects) in the registry for a given patientID with matching ‘status’ attribute. The other parameters can be used to restrict the collection of XDSSubmissionSet objects returned.

**Returns:** XDSSubmissionSet objects matching the query parameters

2570

Parameter Name	Attribute	Opt	Mult
\$XDSSubmissionSetPatientId	XDSSubmissionSet. patientId	R	--
\$XDSSubmissionSetSourceId	XDSSubmissionSet. sourceId	O	M
\$XDSSubmissionSetSubmissionTimeFrom	XDSSubmissionSet. submissionTime Lower value	O	--
\$XDSSubmissionSetSubmissionTimeTo	XDSSubmissionSet. submissionTime Upper value	O	--
\$XDSSubmissionSetAuthorPerson <sup>1</sup>	XDSSubmissionSet. authorPerson	O	--
\$XDSSubmissionSetContentType <sup>2</sup>	XDSSubmissionSet. contentTypeCode	O	M
\$XDSSubmissionSetStatus	XDSSubmissionSet. status	R	M

<sup>1</sup>The value for this parameter is a pattern compatible with the SQL keyword LIKE which allows the use of the following wildcard characters: % to match any (or no) characters and \_ to match a single character. The match shall be applied to the text contained in the Value elements of the authorPerson Slot on the author Classification (value strings of the authorPerson sub-attribute).

2575 <sup>2</sup>Shall be coded according to specification in Section 3.18.4.1.2.3.4 Coding of Code/Code-Scheme.

**3.18.4.1.2.3.7.3 FindFolders**

Find folders (XDSFolder objects) in the registry for a given patientID with matching ‘status’ attribute. The other parameters can be used to restrict the collection of XDSFolder objects returned.

2580

**Returns:** XDSFolder objects matching the query parameters

Parameter Name	Attribute	Opt	Mult
\$XDSFolderPatientId	XDSFolder.patientId	R	--
\$XDSFolderLastUpdateTimeFrom	XDSFolder. lastUpdateTime lower value	O	--
\$XDSFolderLastUpdateTimeTo	XDSFolder. lastUpdateTime upper bound	O	--
\$XDSFolderCodeList <sup>1,3</sup>	XDSFolder. codeList	O	M
\$XDSFolderStatus	XDSFolder.status	R	M

<sup>1</sup>Shall be coded according to specification in Section 3.18.4.1.2.3.4 Coding of Code/Code-Scheme.

2585 <sup>3</sup>Supports AND/OR semantics as specified in Section 3.18.4.1.2.3.5.

### 3.18.4.1.2.3.7.4 GetAll

Get all registry content for a patient given the indicated status, format codes, and confidentiality codes.

#### Returns:

- 2590
- XDSSubmissionSet, XDSDocumentEntry, and XDSFolder objects with patientId attribute matching \$patientId parameter
  - Association objects with sourceObject or targetObject attribute matching one of the above objects

Note: Associations may be returned that reference objects not in the return set.

2595

For example, this could occur when:

- the \$XDSDocumentEntryStatus parameter is Approved and a submitted DocumentEntry has been replaced and is, therefore, Deprecated.
- a SubmissionSet is linked to a DocumentEntry with a different Patient ID, i.e. for a mother and child.

2600

Document Consumers should be prepared to handle these situations.

Parameter Name	Attribute	Opt	Mult
\$patientId	XDSFolder. patientId, XDSSubmissionSet. patientId, XDSDocumentEntry. patientId	R	--
\$XDSDocumentEntryStatus	XDSDocumentEntry. status	R	M
\$XDSSubmissionSetStatus	XDSSubmissionSet. status	R	M
\$XDSFolderStatus	XDSFolder. status	R	M
\$XDSDocumentEntryFormatCode <sup>2</sup>	XDSDocumentEntry. formatCode	O	M
\$XDSDocumentEntryConfidentialityCode <sup>1,2</sup>	XDSDocumentEntry. confidentialityCode <sup>1</sup>	O	M
\$XDSDocumentEntryType <sup>6</sup>	XDSDocumentEntry.objectType	O	M

<sup>1</sup>Supports AND/OR semantics as specified in Section 3.18.4.1.2.3.5.

2605 <sup>2</sup>Shall be coded according to specification in Section 3.18.4.1.2.3.4 Coding of Code/Code-Scheme

<sup>3</sup> See Section 3.18.4.1.2.3.6.2

### 3.18.4.1.2.3.7.5 GetDocuments

Retrieve a collection of XDSDocumentEntry objects. XDSDocumentEntry objects are selected either by their entryUUID or uniqueId attribute.

2610

**Returns:** XSDDocumentEntry objects requested

Parameter Name	Attribute	Opt	Mult
\$XSDDocumentEntryEntryUUID <sup>3</sup>	XSDDocumentEntry. entryUUID	O <sup>1</sup>	M
\$XSDDocumentEntryUniqueId <sup>3</sup>	XSDDocumentEntry. uniqueId	O <sup>1</sup>	M
\$homeCommunityId	None	O <sup>2</sup>	--

<sup>1</sup>Either \$XSDDocumentEntryEntryUUID or \$XSDDocumentEntryUniqueId shall be specified. This transaction shall return an error if both parameters are specified.

2615 <sup>2</sup>The homeCommunityId value is specified as the home attribute on the AdhocQuery element of the query request, as in: <AdhocQuery id="..." home="urn:oid:1.2.3" ... >. Document Consumer Actors shall specify the homeCommunityId value if they received a value for this attribute as part of the previous Registry Stored Query response entry which contained the specified EntryUUID or UniqueID. See Section 3.18.4.1.2.3.8 for more details.

2620 Note: A query for a single XSDDocumentEntry.uniqueId can return multiple results. See ITI TF-3: 4.1.4 under the topic of Document metadata duplication for explanation.

2625 <sup>3</sup>If the Stored Query specifies a returnType of LeafClass then the Document Registry Actor shall verify that all requested DocumentEntry objects to be returned will contain the same Patient ID. If this validation fails an XDSResultNotSinglePatient error shall be returned and no metadata shall be returned.

### 3.18.4.1.2.3.7.6 GetFolders

Retrieve a collection of XDSFolder objects. XDSFolder objects are selected either by their entryUUID or uniqueId attribute.

**Returns:** XDSFolder objects requested.

2630

Parameter Name	Attribute	Opt	Mult
\$XDSFolderEntryUUID <sup>3</sup>	XDSFolder. entryUUID	O <sup>1</sup>	M
\$XDSFolderUniqueId <sup>3</sup>	XDSFolder. uniqueId	O <sup>1</sup>	M
\$homeCommunityId	None	O <sup>2</sup>	--

<sup>1</sup>Either \$XDSFolderEntryUUID or \$XDSFolderUniqueId shall be specified. This transaction shall return an error if both parameters are specified.

2635 <sup>2</sup>The homeCommunityId value is specified as the home attribute on the AdhocQuery element of the query request, as in: <AdhocQuery id="..." home="urn:oid:1.2.3" ... >. Document Consumer Actors shall specify the homeCommunityId value if they received a value for this attribute as part of the previous Registry Stored Query response entry which contained the specified EntryUUID or UniqueID. See Section 3.18.4.1.2.3.8 for more details.

2640 <sup>3</sup>If the Stored Query specifies a returnType of LeafClass then the Document Registry Actor shall verify that all requested DocumentEntry objects to be returned will contain the same Patient ID. If this validation fails an XDSResultNotSinglePatient error shall be returned and no metadata shall be returned.

**3.18.4.1.2.3.7.7 GetAssociations**

Retrieve Association objects whose sourceObject or targetObject attribute match \$suid.

**Returns:** Association objects

2645

Parameter Name	Attribute	Opt	Mult
\$suid	None	R	M
\$homeCommunityId	None	O <sup>1</sup>	-

<sup>1</sup>The homeCommunityId value is specified as the home attribute on the AdhocQuery element of the query request, as in: <AdhocQuery id="..." home="urn:oid:1.2.3" ... >.

Document Consumer Actors shall specify the homeCommunityId value if they received a value for this attribute as part of the previous Registry Stored Query response entry which contained the specified EntryUUID or UniqueID. See Section 3.18.4.1.2.3.8 for more details.

2650

**3.18.4.1.2.3.7.8 GetDocumentsAndAssociations**

Retrieve a collection of XDSDocumentEntry objects and the Association objects surrounding them. XDSDocumentEntry objects are selected either by their entryUUID or uniqueId attribute. This is the GetDocuments query and GetAssociations query combined into a single query.

2655

**Returns:**

- XDSDocumentEntry objects
- Association objects whose sourceObject or targetObject attribute matches one of the above objects

Parameter Name	Attribute	Opt	Mult
\$XDSDocumentEntryEntryUUID <sup>3</sup>	XDSDocumentEntry.entryUUID	O <sup>1</sup>	M
\$XDSDocumentEntryUniqueId <sup>3</sup>	XDSDocumentEntry.uniqueId	O <sup>1</sup>	M
\$homeCommunityId	None	O <sup>2</sup>	--

2660

<sup>1</sup>Either \$XDSDocumentEntryEntryUUID or \$XDSDocumentEntryUniqueId shall be specified. This transaction shall return an error if both parameters are specified.

<sup>2</sup>The homeCommunityId value is specified as the home attribute on the AdhocQuery element of the query request, as in: <AdhocQuery id="..." home="urn:oid:1.2.3" ... >. Document Consumer Actors shall specify the homeCommunityId value if they received a value for this attribute as part of the previous Registry Stored Query response entry which contained the specified EntryUUID or UniqueID. See Section 3.18.4.1.2.3.8 for more details.

2665

<sup>3</sup>If the Stored Query specifies a returnType of LeafClass then the Document Registry Actor shall verify that all requested DocumentEntry objects to be returned will contain the same Patient ID. If this validation fails an XDSResultNotSinglePatient error shall be returned and no metadata shall be returned.

2670

### 3.18.4.1.2.3.7.9 GetSubmissionSets

Retrieve the XDSSubmissionSet objects used to submit a collection of XDSDocumentEntry and XDSFolder objects. The XDSDocumentEntry and XDSFolder objects of interest are identified by their UUIDs in the \$uuid parameter.

2675 **Selection:** XDSSubmissionSet objects are selected because Association objects exist that have:

- Type HasMember
- targetObject attribute containing one of the UUIDs provided in the \$uuid parameter
- sourceObject attribute referencing an XDSSubmissionSet object

**Returns:**

- 2680
- XDSSubmissionSet objects described above
  - Association objects described in the Selection section above

Parameter Name	Attribute	Opt	Mult
\$uuid <sup>2</sup>	XDSDocumentEntry.entryUUID and XDSFolder.entryUUID	R	M
\$homeCommunityId	None	O <sup>1</sup>	--

<sup>1</sup>The homeCommunityId value is specified as the home attribute on the AdhocQuery element of the query request, as in: <AdhocQuery id="..." home="urn:oid:1.2.3" ... >.

2685 Document Consumer Actors shall specify the homeCommunityId value if they received a value for this attribute as part of the previous Registry Stored Query response entry which contained the specified EntryUUID or UniqueID. See Section 3.18.4.1.2.3.8 for more details.

<sup>2</sup>If the Stored Query specifies a returnType of LeafClass then the Document Registry Actor shall verify that all requested Submission Set objects to be returned will contain the same Patient ID.

2690 If this validation fails an XDSResultNotSinglePatient error shall be returned and no metadata shall be returned.

### 3.18.4.1.2.3.7.10 GetSubmissionSetAndContents

Retrieve a SubmissionSet and its contents. SubmissionSet objects is selected either by its entryUUID or uniqueId attribute. The DocumentEntry objects returned may be constrained by their formatCode and confidentialityCode attributes. More specifically, the DocumentEntries returned shall be limited by the following rules:

2695

- If the \$XDSDocumentEntryConfidentialityCode parameter is present in the query, then DocumentEntries shall be returned only if they match this parameter.
- If the \$XDSDocumentEntryFormatCode parameter is present in the query, then DocumentEntries shall be returned only if they match this parameter

2700

**Returns:**

- SubmissionSet identified
  - DocumentEntries linked to the SubmissionSet by HasMember Associations (DocumentEntries shall pass the above rules)
- 2705
- The HasMember Associations identified in the previous rule
  - Folders linked to the SubmissionSet by HasMember Associations
  - The HasMember Associations identified in the previous rule
  - Associations linked to the SubmissionSet by HasMember Associations where the Associations link two objects already in the return set
- 2710
- The HasMember Associations identified in the previous rule

In the above rules, Associations are only returned if both of the objects they connect are part of the return set.

Parameter Name	Attribute	Opt	Mult
\$XDSSubmissionSetEntryUUID <sup>5</sup>	XDSSubmissionSet.entryUUID	O <sup>1</sup>	--
\$XDSSubmissionSetUniqueID <sup>5</sup>	XDSSubmissionSet.uniqueId	O <sup>1</sup>	--
\$XDSDocumentEntryFormatCode <sup>4</sup>	XSDDocumentEntry.formatCode	O	M
\$XDSDocumentEntryConfidentialityCode <sup>4</sup>	XSDDocumentEntry.confidentialityCode <sup>2</sup>	O	M
\$homeCommunityId	None	O <sup>3</sup>	--
\$XDSDocumentEntryType <sup>6</sup>	XSDDocumentEntry.objectType	O	M

2715 <sup>1</sup>Either \$XDSSubmissionSetEntryUUID or \$XDSSubmissionSetUniqueID shall be specified. This transaction shall return an error if both parameters are specified.

<sup>2</sup>Supports AND/OR semantics as specified in Section 3.18.4.1.2.3.5.

2720 <sup>3</sup>The homeCommunityId value is specified as the home attribute on the AdhocQuery element of the query request, as in: <AdhocQuery id="..." home="urn:oid:1.2.3" ... >. Document Consumer Actors shall specify the homeCommunityId value if they received a value for this attribute as part of the previous Registry Stored Query response entry which contained the specified EntryUUID or UniqueID. See Section 3.18.4.1.2.3.8 for more details.

<sup>4</sup>Shall be coded according to specification in Section 3.18.4.1.2.3.4 Coding of Code/Code-Scheme.

2725 <sup>5</sup>If the Stored Query specifies a returnType of LeafClass then the Document Registry Actor shall verify that all requested Submission Set, Folder, and DocumentEntry objects to be returned will contain the same Patient ID. If this validation fails an XDSResultNotSinglePatient error shall be returned and no metadata shall be returned.

<sup>6</sup> See Section 3.18.4.1.2.3.6.2

**3.18.4.1.2.3.7.11 GetFolderAndContents**

2730 Retrieve a Folder and its contents. The Folder object is selected either by its entryUUID or uniqueId attribute. The DocumentEntry objects returned may be constrained by their formatCode and confidentialityCode attributes. More specifically, the DocumentEntries shall be limited by the following rules:

- 2735 • If the \$XDSDocumentEntryConfidentialityCode parameter is present in the query, then DocumentEntries shall be returned only if they match this parameter.
- If the \$XDSDocumentEntryFormatCode parameter is present in the query, then DocumentEntries shall be returned only if they match this parameter

**Returns:**

- Folder identified
- 2740 • DocumentEntries linked to the Folder by HasMember Associations (DocumentEntries shall pass the above rules)
- The HasMember Associations identified in the previous rule

In the above rules, Associations are only returned if both of the objects they connect are part of the return set.

2745

Parameter Name	Attribute	Opt	Mult
\$XDSFolderEntryUUID <sup>5</sup>	XDSFolder. entryUUID	O <sup>1</sup>	--
\$XDSFolderUniqueId <sup>5</sup>	XDSFolder. uniqueId	O <sup>1</sup>	--
\$XDSDocumentEntryFormatCode <sup>4</sup>	XDSDocumentEntry. formatCode	O	M
\$XDSDocumentEntryConfidentialityCode <sup>4</sup>	XDSDocumentEntry. confidentialityCode <sup>2</sup>	O	M
\$homeCommunityId	None	O <sup>3</sup>	--
\$XDSDocumentEntryType <sup>6</sup>	XDSDocumentEntry.objectType	O	M

<sup>1</sup>Either \$XDSFolderEntryUUID or \$XDSFolderUniqueId shall be specified. This transaction shall return an error if both parameters are specified.

<sup>2</sup>Supports AND/OR semantics as specified in Section 3.18.4.1.2.3.5.

2750 <sup>3</sup>The homeCommunityId value is specified as the home attribute on the AdhocQuery element of the query request, as in: <AdhocQuery id="..." home="urn:oid:1.2.3" ... >. Document Consumer Actors shall specify the homeCommunityId value if they received a value for this attribute as part of the previous Registry Stored Query response entry which contained the specified EntryUUID or UniqueID. See Section 3.18.4.1.2.3.8 for more details.

2755 <sup>4</sup>Shall be coded according to specification in Section 3.18.4.1.2.3.4 Coding of Code/Code-Scheme.

<sup>5</sup>If the Stored Query specifies a returnType of LeafClass then the Document Registry Actor shall verify that all requested Folder, and DocumentEntry objects to be returned will contain the same

Patient ID. If this validation fails an XDSResultNotSinglePatient error shall be returned and no metadata shall be returned.

2760 <sup>6</sup> See Section 3.18.4.1.2.3.6.2

### 3.18.4.1.2.3.7.12 GetFoldersForDocument

Retrieve XDSFolder objects that contain the XSDDocumentEntry object provided with the query. XSDDocumentEntry objects are selected either by their entryUUID or uniqueId attribute.

2765 **Returns:** XDSFolder objects that contain specified XSDDocumentEntry object. More specifically, for each Association object of type HasMember that has a targetObject attribute referencing the target XSDDocumentEntry object, return the object referenced by its sourceObject if it is of type XDSFolder.

Parameter Name	Attribute	Opt	Mult
\$XSDDocumentEntryEntryUUID	XSDDocumentEntry.entryUUID	O <sup>1</sup>	--
\$XSDDocumentEntryUniqueId	XSDDocumentEntry.uniqueId	O <sup>1</sup>	--
\$homeCommunityId	None	O <sup>2</sup>	--

2770 <sup>1</sup> Either \$XSDDocumentEntryEntryUUID or \$XSDDocumentEntryUniqueId shall be specified. This transaction shall return an error if both parameters are specified.

2775 <sup>2</sup> The homeCommunityId value is specified as the home attribute on the AdhocQuery element of the query request, as in: <AdhocQuery id="..." home="urn:oid:1.2.3" ... >. Document Consumer Actors shall specify the homeCommunityId value if they received a value for this attribute as part of the previous Registry Stored Query response entry which contained the specified EntryUUID or UniqueID. See Section 3.18.4.1.2.3.8 for more details.

Note: A query for a single XSDDocumentEntry.uniqueId can return multiple results. See ITI TF-3: 4.1.4 under the topic of Document Metadata Duplication for explanation.

### 3.18.4.1.2.3.7.13 GetRelatedDocuments

2780 Retrieve XSDDocumentEntry objects that are related to the specified document via Association objects. Also return the Association objects. The specified document is designated by UUID or uniqueId. The query shall return

- Association objects where:
  - The sourceObject attribute OR the targetObject attribute references the specified document AND
  - 2785 • Both sourceObject attribute and targetObject attribute reference documents AND
  - The associationType attribute matches a value included in the \$AssociationTypes parameter
- XSDDocumentEntry objects referenced by the targetObject attribute OR the sourceObject attribute of an Association object matched above.

2790 Note: A side effect of the query is that the specified document is returned in the results if at least one Association is returned.

Note: A side effect of this query is that if the document specified by the \$XDSDocumentEntryUUID or \$XDSDocumentEntryUniqueId parameters has no associations linking it to other documents, then no documents and no associations are returned.

2795 See ITI TF-3: 4.1.6 Document Relationships and Associations for background.

**Returns:** Association objects and related XDSDocumentEntry objects

**Given :** An XDSDocumentEntry object and a collection of association types.

Parameter Name	Attribute	Opt	Mult
\$XDSDocumentEntryEntryUUID	XDSDocumentEntry.entryUUID	O <sup>1</sup>	--
\$XDSDocumentEntryUniqueId	XDSDocumentEntry.uniqueId	O <sup>1</sup>	--
\$AssociationTypes	Not a named attribute	R	M
\$homeCommunityId	None	O <sup>2</sup>	--
\$XDSDocumentEntryType <sup>3</sup>	XDSDocumentEntry.objectType	O	M

<sup>1</sup>Either \$XDSDocumentEntryEntryUUID or \$XDSDocumentEntryUniqueId shall be specified.

2800 This transaction shall return an error if both parameters are specified.

<sup>2</sup>The homeCommunityId value is specified as the home attribute on the AdhocQuery element of the query request, as in: <AdhocQuery id="..." home="urn:oid:1.2.3" ... >. Document Consumer Actors shall specify the homeCommunityId value if they received a value for this attribute as part of the previous Registry Stored Query response entry which contained the specified EntryUUID or UniqueID. See Section 3.18.4.1.2.3.8 for more details.

2805

<sup>3</sup> See Section 3.18.4.1.2.3.6.2

Note: A query for a single XDSDocumentEntry.uniqueId can return multiple results. See ITI TF-3: 4.1.4 under the topic of Document Metadata Duplication for explanation.

### 3.18.4.1.2.3.7.14 FindDocumentsByReferenceId

2810 This query shall be supported by Registries claiming the “Reference ID” Option. Find documents (XDSDocumentEntry objects) in the registry for a given patientID with a matching ‘status’ attribute. The other parameters can be used to restrict the set of XDSDocumentEntry objects returned.

2815 This Query is semantically identical to the FindDocuments Stored Query (see Section 3.18.4.1.2.3.7.1) except:

- \$XDSDocumentEntryReferenceIdList contains one or more values to match against the referenceIdList document entry. Since referencedIdList is a rim:Slot, entries in the referencedIdList are matched as exact matches against the query parameter values.

**Returns:** XDSDocumentEntry objects matching the query parameters

2820

Parameter Name	Attribute	Opt	Mult
\$XDSDocumentEntryPatientId	XDSDocumentEntry.patientId	R	--

Parameter Name	Attribute	Opt	Mult
\$XDSDocumentEntryReferenceIdList <sup>5</sup>	XSDSDocumentEntry. referenceIdList <sup>3</sup>	R	M
\$XDSDocumentEntryClassCode <sup>1</sup>	XSDSDocumentEntry. classCode	O	M
\$XDSDocumentEntryTypeCode <sup>1</sup>	XSDSDocumentEntry. typeCode	O	M
\$XDSDocumentEntryPracticeSettingCode <sup>1</sup>	XSDSDocumentEntry. practiceSettingCode	O	M
\$XDSDocumentEntryCreationTimeFrom	Lower value of XSDSDocumentEntry. creationTime	O	--
\$XDSDocumentEntryCreationTimeTo	Upper value of XSDSDocumentEntry. creationTime	O	--
\$XDSDocumentEntryServiceStartTimeFrom	Lower value of XSDSDocumentEntry. serviceStartTime	O	--
\$XDSDocumentEntryServiceStartTimeTo	Upper value of XSDSDocumentEntry. serviceStartTime	O	--
\$XDSDocumentEntryServiceStopTimeFrom	Lower value of XSDSDocumentEntry. serviceStopTime	O	--
\$XDSDocumentEntryServiceStopTimeTo	Upper value of XSDSDocumentEntry. serviceStopTime	O	--
\$XDSDocumentEntryHealthcareFacilityTypeCode <sup>1</sup>	XSDSDocumentEntry. healthcareFacilityTypeCode	O	M
\$XDSDocumentEntryEventCodeList <sup>1</sup>	XSDSDocumentEntry. eventCodeList <sup>3</sup>	O	M
\$XDSDocumentEntryConfidentialityCode <sup>1</sup>	XSDSDocumentEntry. confidentialityCode <sup>3</sup>	O	M
\$XDSDocumentEntryAuthorPerson <sup>4</sup>	XSDSDocumentEntry. author	O	M
\$XDSDocumentEntryFormatCode <sup>1</sup>	XSDSDocumentEntry. formatCode	O	M
\$XDSDocumentEntryStatus	XSDSDocumentEntry. status	R	M

<sup>1</sup>Shall be coded according to specification in Section 3.18.4.1.2.3.4 Coding of Code/Code-Scheme.

<sup>3</sup>Supports AND/OR semantics as specified in Section 3.18.4.1.2.3.5.

2825 <sup>4</sup>The value for this parameter is a pattern compatible with the SQL keyword LIKE which allows the use of the following wildcard characters: % to match any (or no) characters and \_ to match a single character. The match shall be applied to the text contained in the Value elements of the authorPerson Slot on the author Classification (value strings of the authorPerson sub-attribute)

2830 <sup>5</sup>The value for this parameter is a pattern compatible with the SQL keyword LIKE which allows the use of the following wildcard characters: % to match any (or no) characters and \_ to match a single character.

#### 3.18.4.1.2.3.8 Use of homeCommunityId

2835 The Registry Stored Query makes use of the homeCommunityId which is a globally unique identifier for a community and is used to obtain the Web Services endpoint of services that provide access to data in that community. homeCommunityId is structured as an OID limited to 64 characters and specified in URI syntax, for example the homeCommunityId of 1.2.3 would be formatted as urn:oid:1.2.3.

Its use is as follows:

- 2840 • It is returned within the response to Registry Stored Query and Cross Gateway Query transactions to indicate the association of a response element with a community. It is specified as the eBRIM 'home' attribute within the ExtrinsicObject, RegistryPackage and ObjectRef elements. Document Consumers process the value as an opaque unique identifier.
- 2845 • It is an optional parameter to Registry Stored Query requests, not requiring a patient id parameter, and Retrieve Document Set requests to indicate which community to direct the request.

For stored queries which do not require the patient id as a parameter , meaning query by EntryUUID or UniqueID:

- 2850 • If the Registry Stored Query is being addressed to an Initiating Gateway then the Document Consumer may have previously sent a Registry Stored Query to the Initiating Gateway which included a patient id and saved the homeCommunityId which was returned on the element containing the EntryUUID or uniqueID. If this is not the case the Document Consumer shall have access to the correct homeCommunityId through some other means.
- 2855 • If the Document Consumer received the EntryUUID or uniqueID in a previous Registry Stored Query response which contained a homeCommunityId, then the Document Consumer shall specify the homeCommunityId parameter.
- 2860 • The homeCommunityId value is specified as the home attribute on the AdhocQuery element of the query request, as in:  
<AdhocQuery id="..." home="urn:oid:1.2.3" ... >
- Each query request can have at most one homeCommunityId value. If the Document Consumer specifies multiple entryUUID or uniqueID values they must all be associated with the same homeCommunityId value. Multiple individual query requests can be used to retrieve data associated with different homeCommunityIds.

#### 3.18.4.1.2.3.9 Merge Patient ID

2865 Patient identifiers can be merged via messages received through the Patient Identity Feed transaction [ITI-8]. See Section 3.8.4.2 for details. Other relevant material can be found in ITI TF-3: 4.3.1.2.4 XDS Registry Enforcement of Attributes and ITI TF-3: 4.3.1.2.5 XDS Registry Responsibilities.

2870 This section defines the effects that merged patient identifiers have on the Registry Stored Query transaction. The process of merging patient identifiers involves two patient identifiers: the subsumed patient identifier and the surviving patient identifier. The subsumed patient identifier stops being used and all patient records that were associated with that identifier are now associated with the surviving patient identifier. See Section 3.8.4.2.4 for how these identifiers map into the Merge Patient Identifier message.

2875 Three transactions handle processing of merged patient identifiers:

- Patient Identity Feed [ITI-8] – accepts the merge request
- Register Document Set-b [ITI-42] – accepts metadata containing patient identifiers
- Registry Stored Query [ITI-18] – retrieves metadata containing patient identifiers.

2880 The above transactions and the profiles that use them do not specify how patient identifier merging is to be implemented. They do specify the results of the merge in terms of possible rejection of Register Document Set-b transactions and results returned in Registry Stored Query transactions.

2885 The following two sections document the responsibilities of the Document Registry Actor and the Document Consumer Actor in processing Registry Stored Query transactions that reference patient identifiers that are involved in merges.

#### **3.18.4.1.2.3.9.1 Responsibilities of the Document Registry Actor**

The rules governing the handling of patient identity merges depend on the following factors:

- Does the stored query contain patient identifier parameters?
- 2890 • Has the registry received a patient identity merge message which references the patient identity parameter as either the subsumed patient identifier or the surviving patient identifier?
- The content of any previously received merge message can contribute to the result of a stored query.
- 2895 • More than one merge message may contribute to the results of a stored query (e.g., Patient ID A merged into Patient ID B merged into Patient ID C etc.)

The following assertions shall be met by a Document Registry Actor when returning metadata in a Registry Stored Query transaction. The terms 'subsumed patient identifier' and 'surviving patient identifier' refer to the contents of any previously received merge message.

- 2900 • If the query includes a patient identifier parameter and that patient identity matches the subsumed patient identifier of a merge message then the query shall return no results. This is not an error condition and the Registry Stored Query transaction shall not return an error status.
- 2905 • If the query includes a patient identifier and that patient identifier matches the surviving patient identifier of a previous merge message then the query shall return the composite of:

- Metadata registered against the surviving patient identifier
- Metadata registered against the subsumed patient identifier
- Metadata returned shall show the surviving patient identifier in these metadata attributes:
  - XDSSubmissionSet.patientId
  - 2910 • XDSDocumentEntry.patientId
  - XDSFolder.patientId
- Patient identifiers may be affected by multiple patient identity merges.
- The subsumed patient identifier may have been referenced in a prior A40 Merge message as the surviving patient identifier.
- 2915 • The surviving patient identifier may have been referenced in a prior A40 Merge message as the surviving patient identifier.
- Patient demographics in XDSDocumentEntry.sourcePatientInfo shall not be altered as a result of an A40 Merge.

#### **3.18.4.1.2.3.9.2 Responsibilities of the Document Consumer Actor**

2920 The following assertions affect the Document Consumer Actor:

- The Document Consumer shall depend on the patient identity in the following metadata attributes after a patient identifier is merged:
    - XDSSubmissionSet.patientId
    - XDSDocumentEntry.patientId
    - 2925 • XDSFolder.patientId
  - The Document Registry is required to return the surviving patient identifier of a merge in place of the original subsumed patient identifier.
    - The Document Consumer shall not depend on the patient demographics found in XDSDocumentEntry.sourcePatientInfo after a patient identifier is merged. Patient demographics should be accessed through PIX/PDQ services or their equivalent.
- 2930

#### **3.18.4.1.2.4 Stored Query IDs**

2935 The standard XDS queries are assigned the following Query IDs. These IDs are used in the AdhocQueryRequest to reference queries stored on the Document Registry Actor. Query IDs are in UUID format (RFC 4122). An error shall be returned when an unsupported stored query ID is received.

Note: This query mechanism can be extended by adding a query by allocating a Query ID, defining query parameters, and implementing the query in the Document Registry.

Query Name	Query ID
FindDocuments	urn:uuid:14d4debf-8f97-4251-9a74-a90016b0af0d
FindSubmissionSets	urn:uuid:f26abbc-b-ac74-4422-8a30-edb644bbc1a9
FindFolders	urn:uuid:958f3006-baad-4929-a4de-ff1114824431
GetAll	urn:uuid:10b545ea-725c-446d-9b95-8aeb444eddf3
GetDocuments	urn:uuid:5c4f972b-d56b-40ac-a5fc-c8ca9b40b9d4
GetFolders	urn:uuid:5737b14c-8a1a-4539-b659-e03a34a5e1e4
GetAssociations	urn:uuid:a7ae438b-4bc2-4642-93e9-be891f7bb155
GetDocumentsAndAssociations	urn:uuid:bab9529a-4a10-40b3-a01f-f68a615d247a
GetSubmissionSets	urn:uuid:51224314-5390-4169-9b91-b1980040715a
GetSubmissionSetAndContents	urn:uuid:e8e3cb2c-e39c-46b9-99e4-c12f57260b83
GetFolderAndContents	urn:uuid:b909a503-523d-4517-8acf-8e5834dfc4c7
GetFoldersForDocument	urn:uuid:10cae35a-c7f9-4cf5-b61e-fc3278ffb578
GetRelatedDocuments	urn:uuid:d90e5407-b356-4d91-a89f-873917b4b0e6
FindDocumentsByReferenceId	urn:uuid:12941a89-e02e-4be5-967c-ce4bfc8fe492

2940

### 3.18.4.1.2.5 Compatibility of Options

The presence or absence of the optional \$XDSDocumentEntryType parameter triggers different behaviors on the Document Registry. If this parameter is specified, and the Document Registry does not support it, the Document Registry shall ignore. If it is specified, and the Document Registry does support it, the proper information is returned.

2945

- If the Document Consumer does not support the On-Demand Documents Option, it will send a Registry Stored Query request which does not contain the \$XDSDocumentEntryType parameter. The Document Registry will therefore not supply any On-Demand Document Entries in the query response.
- If the Document Consumer *does* support the On-Demand Documents Option then it will be able to specify the \$XDSDocumentEntryType parameter containing the uuid for On-Demand Document Entries in a Registry Stored Query. A Document Registry with the

2950

2955 On-Demand Documents Option will recognize the \$XDSDocumentEntryType parameter and process accordingly. A Document Registry which does not support the On-Demand Documents Option, will ignore the \$XDSDocumentEntryType parameter. Since there cannot be any On-Demand Document Entries held by a Document Registry which does not support On-Demand Documents, this is a consistent response to the request.

#### 3.18.4.1.2.6 Managing Large Query Responses

2960 EbXML version 3.0 supports query results pagination (ebRS version 3.0 chapter 6.2). The interactions between the stored query capability and the query results pagination capability within the standard have never been reconciled and are not recommended for use together. It is recommended instead that query pagination be implemented within the Document Consumer Actor.

2965 This can be accomplished by specifying returnType="ObjectRef" on all large queries. This returns a list of references (UUIDs) instead of full objects (large XML structures). This is practical for queries returning thousands of objects. To construct a page for display, a small number of objects can be retrieved through a second query. This is repeated for each page. As an example, the following sequence of queries could be used to list a large number of documents:

- 2970 • FindDocuments query with returnType="ObjectRef" which returns a large collections of ObjectRefs (UUIDs)
- GetDocuments query with returnType="LeafClass" issued with a subset of the above returned UUIDs which returns the details to construct one page of listing

OR

2975 GetDocumentsAndAssociations query with returnType="LeafClass" issued with a subset of the above returned UUIDs which returns the details to construct one page of listing. By retrieving the Association objects, the existence of document replacement, transformation, and amendment can be included into the display.

#### 3.18.4.1.2.7 Web Services Transport

2980 The query request and response will be transmitted using Web Services, according to the requirements specified in ITI TF-2x: Appendix V. The specific values for the WSDL describing the Stored Query Service are described in this section.

2985 The Document Registry Actor shall accept a Registry Stored Query Request formatted as a SIMPLE SOAP message and respond with a Registry Stored Query Response formatted as a SIMPLE SOAP message. The Document Consumer Actor shall generate the Registry Stored Query Request formatted as a SIMPLE SOAP message and accept a Registry Stored Query Response formatted as a SIMPLE SOAP message.

**IHE-WSP201) The attribute /wsdl:definitions/@name shall be "DocumentRegistry".**

The following WSDL naming conventions shall apply:

2990 `wsdl:definitions/@name="DocumentRegistry":  
query message -> "RegistryStoredQuery_Message"`

2995      query response    -> "RegistryStoredQuery\_Response\_Message"  
          portType        -> "DocumentRegistry\_PortType"  
          operation       -> "RegistryStoredQuery"  
          SOAP 1.2 binding -> "DocumentRegistry\_Binding\_Soap12"  
          SOAP 1.2 port    -> "DocumentRegistry\_Port\_Soap12"

**IHE-WSP202) The targetNamespace of the WSDL shall be “urn:ihe:iti:xds-b:2007”**

Document Registry: These are the requirements for the Registry Stored Query transaction presented in the order in which they would appear in the Document Registry WSDL definition:

- 3000      • The following types shall be imported (xsd:import) in the /definitions/types section:
- namespace=" urn:oasis:names:tc:ebxml-regrep:xsd:query:3.0",  
           schemaLocation="query.xsd"
  - The /definitions/message/part/@element attribute of the Registry Stored Query Request message shall be defined as “query:AdhocQueryRequest”
- 3005      • The /definitions/message/part/@element attribute of the Registry Stored Query Response message shall be defined as “query:AdhocQueryResponse”
- Refer to Table 3.18.4.1.2.7 below for additional attribute requirements
  - To support the Asynchronous Web Services Exchange Option on the Document Consumer, the Document Registry shall support the use of a non-anonymous response EPR in the WS-Addressing replyTo header.
- 3010

**Table 3.18.4.1.2.7-1: Additional Attribute Requirements**

Attribute	Value
/definitions/portType/operation@name	DocumentRegistry_RegistryStoredQuery
/definitions/portType/operation/input/ @wsaw:Action	urn:ihe:iti:2007:RegistryStoredQuery
/definitions/portType/operation/output/ @wsaw:Action	urn:ihe:iti:2007:RegistryStoredQuery Response
/definitions/binding/operation/wsoap12 :operation/@soapActionRequired	false

3015      The following WSDL fragment shows an example of Registry Stored Query transaction definition:

```

3020 <?xml version="1.0" encoding="utf-8"?>
      <definitions ...>
        ...
        <types>
          <xsd:schema elementFormDefault="qualified" targetNamespace="urn:ihe:iti:xds-b:2007">
            <xsd:import
              namespace="urn:oasis:names:tc:ebxml-regrep:xsd:query:3.0"
              schemaLocation="schema\query.xsd" />
            ...
          </xsd:schema>
        </types>
        <message name="RegistryStoredQuery_Message">
          <documentation>Registry Stored Query</documentation>
          <part name="body" element="query:AdhocQueryRequest" />
3030 </message>
        <message name="RegistryStoredQueryResponse_Message">
          <documentation>Registry Stored Query Response</documentation>
          <part name="body" element="query:AdhocQueryResponse" />
3035 </message>
        ...
        <portType name="DocumentRegistry_PortType">
          <operation name="DocumentRegistry_RegistryStoredQuery">
            <input message="ihe:RegistryStoredQuery_Message"
              wsaw:Action="urn:ihe:iti:2007:RegistryStoredQuery" />
3040 <output message="ihe:RegistryStoredQueryResponse_Message"
              wsaw:Action="urn:ihe:iti:2007:RegistryStoredQueryResponse" />
            </operation>
            ...
          </portType>
3045 ...
      </definitions>

```

A full WSDL for the Document Repository and Document Registry Actors is found in ITI TF-2x: Appendix W.

### 3050 3.18.4.1.2.7.1 Sample SOAP Messages

The samples in the following two sections show a typical SOAP request and its relative SOAP response. The sample messages also show the WS-Addressing headers `<a:Action/>`, `<a:MessageID/>`, `<a:ReplyTo/>`...; these WS-Addressing headers are populated according to the IHE ITI TF-2x: Appendix V: Web Services for IHE Transactions. The body of the SOAP message is omitted for brevity; in a real scenario the empty element will be populated with the appropriate metadata.

3055 Samples presented in this section are also available online on the IHE FTP site, see ITI TF-2x: Appendix W.

#### 3.18.4.1.2.7.1.1 Sample Registry Stored Query SOAP Request

##### 3060 3.18.4.1.2.7.1.1.1 Synchronous Web Services Exchange

```

3065 <s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
      xmlns:a="http://www.w3.org/2005/08/addressing">
      <s:Header>
3070   <a:Action s:mustUnderstand="1">urn:ihe:iti:2007:RegistryStoredQuery</a:Action>
      <a:MessageID>urn:uuid:def119ad-dc13-49c1-a3c7-e3742531f9b3</a:MessageID>
      <a:ReplyTo s:mustUnderstand="1">>
      <a:Address>http://www.w3.org/2005/08/addressing/anonymous</a:Address>
      </a:ReplyTo>
      <a:To>http://localhost/service/IHEXDSRegistry.svc</a:To>
      </s:Header>
      <s:Body>
      <query:AdhocQueryRequest
3075   xmlns:query="urn:oasis:names:tc:ebxml-regrep:xsd:query:3.0"
   xmlns:rim="urn:oasis:names:tc:ebxml-regrep:xsd:rim:3.0"
   xmlns:rs="urn:oasis:names:tc:ebxml-regrep:xsd:rs:3.0">
      <query:ResponseOption returnComposedObjects="true" returnType="LeafClass"/>
      <rim:AdhocQuery id=" urn:uuid:14d4debf-8f97-4251-9a74-a90016b0af0d ">
      <rim:Slot name="$XDSDocumentEntryPatientId">
3080   <rim:ValueList>
      <rim:Value>'st3498702^^^&amp;1.3.6.1.4.1.21367.2005.3.7&amp;ISO'</rim:Value>
      </rim:ValueList>
      </rim:Slot>
      <rim:Slot name="$XDSDocumentEntryStatus">
3085   <rim:ValueList>
      <rim:Value>('urn:oasis:names:tc:ebxml-
regrep:ResponseStatusType:Approved')</rim:Value>
      </rim:ValueList>
      </rim:Slot>
3090   <rim:Slot name="$XDSDocumentEntryCreationTimeFrom">
      <rim:ValueList>
      <rim:Value>200412252300</rim:Value>
      </rim:ValueList>
      </rim:Slot>
3095   <rim:Slot name="$XDSDocumentEntryCreationTimeTo">
      <rim:ValueList>
      <rim:Value>200501010800</rim:Value>
      </rim:ValueList>
      </rim:Slot>
3100   <rim:Slot name="$XDSDocumentEntryHealthcareFacilityTypeCode">
      <rim:ValueList>
      <rim:Value>('Emergency Department')</rim:Value>
      </rim:ValueList>
      </rim:Slot>
3105   </rim:AdhocQuery>
      </query:AdhocQueryRequest>
      </s:Body>
    </s:Envelope>

```

### 3.18.4.1.2.7.1.1.2 Asynchronous Web Services Exchange

3110

```

3115 <s:Envelope
      xmlns:s="http://www.w3.org/2003/05/soap-envelope"
      xmlns:a="http://www.w3.org/2005/08/addressing">
    <s:Header>
3120 <a:Action s:mustUnderstand="1">urn:ihe:iti:2007:RegistryStoredQuery</a:Action>
      <a:MessageID>urn:uuid:a02ca8cd-86fa-4afc-a27c-616c183b2055</a:MessageID>
      <a:ReplyTo>
        <a:Address> http://192.168.2.4:9080/XDS/DocumentConsumerReceiver.svc </a:Address>
      </a:ReplyTo>
      <a:To
3125 s:mustUnderstand="1">http://localhost:2647/XdsService/DocumentRegistryReceiver.svc</a:To>
    </s:Header>
    <s:Body>
      <query:AdhocQueryRequest
3130 <query:AdhocQueryRequest
          xmlns:query="urn:oasis:names:tc:ebxml-regrep:xsd:query:3.0"
          xmlns:rim="urn:oasis:names:tc:ebxml-regrep:xsd:rim:3.0"
          xmlns:rs="urn:oasis:names:tc:ebxml-regrep:xsd:rs:3.0">
            <query:ResponseOption returnComposedObjects="true" returnType="LeafClass"/>
            <rim:AdhocQuery id=" urn:uuid:14d4debf-8f97-4251-9a74-a90016b0af0d ">
              <rim:Slot name="$XDSDocumentEntryPatientId">
                <rim:ValueList>
3135 <rim:Value>st3498702^^^&amp;1.3.6.1.4.1.21367.2005.3.7&amp;ISO</rim:Value>
                </rim:ValueList>
              </rim:Slot>
              <rim:Slot name="$XDSDocumentEntryStatus">
                <rim:ValueList>
3140 <rim:Value>('urn:oasis:names:tc:ebxml-
regrep:ResponseStatusType:Approved')</rim:Value>
                </rim:ValueList>
              </rim:Slot>
              <rim:Slot name="$XDSDocumentEntryCreationTimeFrom">
                <rim:ValueList>
3145 <rim:Value>200412252300</rim:Value>
                </rim:ValueList>
              </rim:Slot>
              <rim:Slot name="$XDSDocumentEntryCreationTimeTo">
                <rim:ValueList>
3150 <rim:Value>200501010800</rim:Value>
                </rim:ValueList>
              </rim:Slot>
              <rim:Slot name="$XDSDocumentEntryHealthcareFacilityTypeCode">
                <rim:ValueList>
3155 <rim:Value>('Emergency Department')</rim:Value>
                </rim:ValueList>
              </rim:Slot>
            </rim:AdhocQuery>
          </query:AdhocQueryRequest>
        </s:Body>
3160 </s:Envelope>

```

### 3.18.4.1.2.7.1.2 Sample Registry Stored Query SOAP Response

#### 3.18.4.1.2.7.1.2.1 Synchronous Web Services Exchange

```

3165 <s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
      xmlns:a="http://www.w3.org/2005/08/addressing">
    <s:Header>
      <a:Action s:mustUnderstand="1">urn:ihe:iti:2007:RegistryStoredQueryResponse</a:Action>
      <a:RelatesTo>urn:uuid:def119ad-dc13-49c1-a3c7-e3742531f9b3</a:RelatesTo>
    </s:Header>
3170 <s:Body>
      <query:AdhocQueryResponse xmlns:query="urn:oasis:names:tc:ebxml-regrep:xsd:query:3.0"/>
    </s:Body>
  </s:Envelope>

```

**3.18.4.1.2.7.1.2.2 Asynchronous Web Services Exchange**

```

3175 <s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope"
      xmlns:a="http://www.w3.org/2005/08/addressing">
      <s:Header>
        <a:Action s:mustUnderstand="1">urn:ihe:iti:2007:RegistryStoredQueryResponse</a:Action>
3180 <a:MessageID>urn:uuid:D6C21225-8E7B-454E-9750-821622C099DB</a:MessageID>
        <a:RelatesTo>urn:uuid:a02ca8cd-86fa-4afc-a27c-616c183b2055</a:RelatesTo>
        <a:To
3185 s:mustUnderstand="1">http://localhost:2647/XdsService/DocumentConsumerReceiver.svc</a:To>
      </s:Header>
      <s:Body>
        <query:AdhocQueryResponse status="Success"
          xmlns:query="urn:oasis:names:tc:ebxml-regrep:xsd:query:3.0"
          xmlns:rjm="urn:oasis:names:tc:ebxml-regrep:xsd:rjm:3.0">
          <!--Rest of AdhocQueryResponse message goes here -->
3190
        </query:AdhocQueryResponse>
      </s:Body>
    </s:Envelope>

```

**3.18.4.1.3 Expected Actions**

3195 The Document Registry Actor shall

1. Accept a parameterized query in an AdhocQueryRequest message
2. Verify the required parameters are included in the request. Additionally, special rules documented in the above section 'Parameters for Required Queries' shall be verified.
3. Errors shall be returned for the following conditions:

3200 • Unknown query ID (error code XDSUnknownStoredQuery)

- Required parameter missing (error code XDSSStoredQueryParamNumber)

See ITI TF-3: 4.2.4 Error Reporting for additional error codes and general information on formatting error responses.

4. Process the query as appropriate:

3205 • For Document Registry Actors: Retrieve the internal implementation template of the query based on the Query ID supplied in the query request. Substitute appropriate parameters as indicated in Section 3.18.4.1.2.3.7 Parameters for Required Queries and execute the query. The Document Registry shall accept the homeCommunityId value if it is specified in a Registry Stored Query request. If a patient identifier specified as a parameter to the query is unknown to the Document Registry it shall return a successful response with no elements.

3210 • For Initiating Gateway Actors:

3215 • Initiating Gateway receives a Registry Stored Query by patient id: It shall determine a) which Responding Gateways this request should be sent to and b) what patient id to use in the Cross Gateway Query. Detailed specification of these steps is not in the intended scope of this profile. Combination of this profile with other existing profiles (e.g., PIX/PDQ), future profiles or configuration mechanisms is possible. Please refer to ITI TF-1: E.7 XCA and Patient Identification Management for possible use of existing

- profiles PIX and PDQ. For each Responding Gateway identified, the Initiating Gateway shall update the query with the correct patient identifier corresponding to the Responding Gateway's community and initiates a Cross Gateway Query transaction to the Responding Gateway. If the Initiating Gateway is grouped with a Document Consumer it will also initiate a Registry Stored Query to the local Document Registry.
- 3220
- Initiating Gateway receives a Registry Stored Query by entryUUID or uniqueID: Verify homeCommunityId has been specified. If missing return Failure status with XDSMissingHomeCommunityId error code. If homeCommunityId not recognized return
- 3225
- a Failure or PartialSuccess status with XDSUnknownCommunity error code. Determine which Responding Gateway to contact by using the homeCommunityId to obtain the Web Services endpoint of the Responding Gateway. The process of obtaining the Web Services endpoint is not further specified in this profile. If the homeCommunityId represents the local community the Initiating Gateway shall initiate a Registry Stored
- 3230
- Query to the local Document Registry. The Initiating Gateway shall specify the homeCommunityId in the Cross Gateway Query by entryUUID or uniqueID which identifies the community associated with the Responding Gateway. For details regarding the homeCommunityId see Section 3.18.4.1.2.3.8 and ITI TF-2b: 3.38.4.1.2.1.
5. Return XML formatted metadata in an AdhocQueryResponse message.
- 3235
- The Document Registry may specify the homeCommunityID attribute on any appropriate elements
  - The Initiating Gateway shall specify the homeCommunityID attribute on all appropriate elements. If the Initiating Gateway contacted a Document Registry, the Document Registry response might not contain the homeCommunityId. In this case the Initiating
- 3240
- Gateway shall add the homeCommunityId of its local community to the Document Registry response prior to including it in the consolidated response to the Document Consumer. The homeCommunityId attribute corresponds to the 'home' attribute specified in the eBRIM standard. For more information on homeCommunityId see Section
- 3245
- 3.18.4.1.2.3.8 and ITI TF-2b: 3.38.4.1.2.1. The elements that shall include the home attribute are:
  - If returnType="LeafClass" the ExtrinsicObject and RegistryPackage elements shall contain the home attribute.
  - If returnType="ObjectRef" the ObjectRef element shall contain the home attribute
  - If the Initiating Gateway is unable to get an appropriate response from a selected
- 3250
- Responding Gateway it shall include in its response to the Document Consumer an XDSUnavailableCommunity error code where the context identifies the unavailable Responding Gateway. In this case, and any other error from a Responding Gateway, the Initiating Gateway shall return to the Document Consumer either a Failure status (if no part was successful) or a PartialSuccess status.
- 3255
6. When the Document Consumer receives the query response from the Initiating Gateway it must account for two aspects of the response; namely that a) the homeCommunityId attribute will be specified b) the Document Consumer may not be able to map the repository id value

3260 directly to the Document Repository. XCA assumes a common coding/vocabulary scheme is used across all communities. For example, all communities shall have common privacy consent vocabularies. The Document Consumer shall retain the values of the homeCommunityId attribute for future interaction with the Initiating Gateway.

3265 This transaction may return both errors and results in an AdhocQueryResponse message. To do this, the returned AdhocQueryResponse message would contain both a RegistryObjectList element and a RegistryErrorList element. See ITI TF-3: 4.2.4 Error Reporting for additional details on formatting of error responses.

#### **3.18.4.1.3.1 Sample Query Request**

This example query specifies:

- The FindDocuments query (id attribute of AdhocQuery element)
- patientID st3498702^^^&1.3.6.1.4.1.21367.2005.3.7&ISO
- 3270 • Return Approved documents only
- Time range (creation time) 200412252300 to 200501010800
- Healthcare Facility Type Code of Emergency Department

Note that ebRS 3.0 specifies the use of Slot to specify name/value(s) pairs as parameters to a Stored Query.

3275 Note: query parameter names are highlighted for readability.

```

3280 <query:AdhocQueryRequest
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
      xmlns:query="urn:oasis:names:tc:ebxml-regrep:xsd:query:3.0"
      xmlns:rims="urn:oasis:names:tc:ebxml-regrep:xsd:rims:3.0"
      xmlns:rs="urn:oasis:names:tc:ebxml-regrep:xsd:rs:3.0">
      <query:ResponseOption returnComposedObjects="true" returnType="LeafClass"/>
      <rims:AdhocQuery id="urn:uuid:14d4debf-8f97-4251-9a74-a90016b0af0d">
3285   <rims:Slot name="$XSDSDocumentEntryPatientId">
     <rims:ValueList>
3290   <rims:Value>'st3498702^^^&amp;1.3.6.1.4.1.21367.2005.3.7&amp;ISO'</rims:Value>
     </rims:ValueList>
     </rims:Slot>
     <rims:Slot name="$XSDSDocumentEntryStatus">
       <rims:ValueList>
3295   <rims:Value>('urn:oasis:names:tc:ebxml-
regrep:StatusType:Approved')</rims:Value>
       </rims:ValueList>
     </rims:Slot>
     <rims:Slot name="$XSDSDocumentEntryCreationTimeFrom">
       <rims:ValueList>
3300   <rims:Value>200412252300</rims:Value>
       </rims:ValueList>
     </rims:Slot>
     <rims:Slot name="$XSDSDocumentEntryCreationTimeTo">
       <rims:ValueList>
3305   <rims:Value>200501010800</rims:Value>
       </rims:ValueList>
     </rims:Slot>
     <rims:Slot name="$XSDSDocumentEntryHealthcareFacilityTypeCode">
       <rims:ValueList>
3310   <rims:Value>('Emergency Department')</rims:Value>
       </rims:ValueList>
     </rims:Slot>
   </rims:AdhocQuery>
</query:AdhocQueryRequest>

```

3315 The following example shows a get documents query for XSDSDocumentEntry objects for a specified list of entryUUIDs (urn:uuid:aff99222-18e3-4812-bc71-c410b2860e18, urn:uuid:aff99222-18e3-4812-bc71-c410b2860e19, urn:uuid:aff99222-18e3-4812-bc71-c410b2860e20) and corresponding homeCommunityId value (urn:oid:1.2.3):

```

3320 <query:AdhocQueryRequest ... >
      <query:ResponseOption returnComposedObjects="true" returnType="LeafClass"/>
      <rims:AdhocQuery id="urn:uuid:5c4f972b-d56b-40ac-a5fc-c8ca9b40b9d4" home="urn:oid:1.2.3">
3325   <rims:Slot name="$XSDSDocumentEntryEntryUUID">
     <rims:ValueList>
     <rims:Value>
3330   ("urn:uuid:aff99222-18e3-4812-bc71-c410b2860e18",
     "urn:uuid:aff99222-18e3-4812-bc71-c410b2860e19",
     "urn:uuid:aff99222-18e3-4812-bc71-c410b2860e20")
     </rims:Value>
     </rims:ValueList>
   </rims:Slot>
   </rims:AdhocQuery>
</query:AdhocQueryRequest>

```

### **3.18.4.1.3.2 Intentionally Left Blank**

#### **3335 3.18.4.1.3.3 Sample Query Response**

This sample query response corresponds to the above query. Note that the query response message is coded in version 3.0 ebRIM and ebRS. This sample response and the ebXML Registry version 3.0 schema files are available online. The Implementation Guide found at [http://wiki.ihe.net/index.php?title=ITI\\_Implementation\\_Guide](http://wiki.ihe.net/index.php?title=ITI_Implementation_Guide) contains such supplemental material.

3340

```

3345 <?xml version="1.0" encoding="UTF-8"?>
      <AdhocQueryResponse
        xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
        xsi:schemaLocation="urn:oasis:names:tc:ebxml-regrep:xsd:query:3.0
          file:/Users/bill/RegSchema/V3.0/query.xsd"
        xmlns="urn:oasis:names:tc:ebxml-regrep:xsd:query:3.0"
        xmlns:rim="urn:oasis:names:tc:ebxml-regrep:xsd:rim:3.0"
        status="urn:oasis:names:tc:ebxml-regrep:ResponseStatusType:Success">
3350   <rim:RegistryObjectList>
        <rim:ExtrinsicObject
          xmlns:q="urn:oasis:names:tc:ebxml-regrep:xsd:query:3.0"
          xmlns:rim="urn:oasis:names:tc:ebxml-regrep:xsd:rim:3.0"
          id="urn:uuid:08a15a6f-5b4a-42de-8f95-89474f83abdf"
3355         isOpaque="false"
          mimeType="text/xml"
          objectType="urn:uuid:7edca82f-054d-47f2-a032-9b2a5b5186c1"
          status="urn:oasis:names:tc:ebxml-regrep:StatusType:Approved">
3360       <rim:Slot name="URI">
        <rim:ValueList>
          <rim:Value>http://localhost:8080/XDS/Repository/08a15a6f-5b4a-42de-
3365 8f95-89474f83abdf.xml</rim:Value>
        </rim:ValueList>
      </rim:Slot>
      <rim:Slot name="authorInstitution">
        <rim:ValueList>
          <rim:Value>Some
3370 Hospital^^^^^^^^^1.2.3.4.5.6.7.8.9.1789.45</rim:Value>
        </rim:ValueList>
      </rim:Slot>
      <rim:Slot name="creationTime">
        <rim:ValueList>
          <rim:Value>200412261119</rim:Value>
3375 </rim:ValueList>
      </rim:Slot>
      <rim:Slot name="hash">
        <rim:ValueList>
          <rim:Value>4cf4f82d78b5e2aac35c31bca8cb79fe6bd6a41e</rim:Value>
3380 </rim:ValueList>
      </rim:Slot>
      <rim:Slot name="languageCode">
        <rim:ValueList>
          <rim:Value>en-us</rim:Value>
3385 </rim:ValueList>
      </rim:Slot>
      <rim:Slot name="serviceStartTime">
        <rim:ValueList>
          <rim:Value>200412230800</rim:Value>
3390 </rim:ValueList>
      </rim:Slot>
      <rim:Slot name="serviceStopTime">
        <rim:ValueList>
          <rim:Value>200412230801</rim:Value>
3395 </rim:ValueList>
      </rim:Slot>
      <rim:Slot name="size">
        <rim:ValueList>
          <rim:Value>54449</rim:Value>
3400 </rim:ValueList>
      </rim:Slot>
      <rim:Slot name="sourcePatientId">
        <rim:ValueList>
          <rim:Value>jd12323^^^wsh</rim:Value>
3405 </rim:ValueList>
      </rim:Slot>
      <rim:Slot name="sourcePatientInfo">
        <rim:ValueList>
          <rim:Value>PID-3|pid1^^^domain</rim:Value>
          <rim:Value>PID-5|Doe^John^^^</rim:Value>

```

```

3410         <rim:Value>PID-7|19560527</rim:Value>
           <rim:Value>PID-8|M</rim:Value>
           <rim:Value>PID-11|100 Main St^^Metropolis^I1^44130^USA</rim:Value>
           </rim:ValueList>
3415     </rim:Slot>
           <rim:Name>
3420         <rim:LocalizedString charset="UTF-8" value="Sample document 1"
xml:lang="en-us"/>
           </rim:Name>
           <rim:Description/>
           <rim:Classification
3425         classificationScheme="urn:uuid:41a5887f-8865-4c09-adf7-
e362475b143a"
           classifiedObject="urn:uuid:08a15a6f-5b4a-42de-8f95-89474f83abdf"
           id="urn:uuid:ac872fc0-1c6e-439f-84d1-f76770a0ccdf"
           nodeRepresentation="Education"
           objectType="Urn:oasis:names:tc:ebxml-
regrep:ObjectType:RegistryObject:Classification">
           <rim:Slot name="codingScheme">
3430             <rim:ValueList>
                 <rim:Value>Connect-a-thon classCodes</rim:Value>
             </rim:ValueList>
           </rim:Slot>
           <rim:Name>
3435         <rim:LocalizedString charset="UTF-8" value="Education"
xml:lang="en-us"/>
           </rim:Name>
           <rim:Description/>
           </rim:Classification>
           <rim:Classification
3440         classificationScheme="urn:uuid:f4f85eac-e6cb-4883-b524-
f2705394840f"
           classifiedObject="urn:uuid:08a15a6f-5b4a-42de-8f95-89474f83abdf"
           id="urn:uuid:fla8c8e4-3593-4777-b7e0-8b0773378705"
           nodeRepresentation="C"
           objectType="Urn:oasis:names:tc:ebxml-
3445         regrep:ObjectType:RegistryObject:Classification">
           <rim:Slot name="codingScheme">
3450             <rim:ValueList>
                 <rim:Value>Connect-a-thon confidentialityCodes</rim:Value>
             </rim:ValueList>
           </rim:Slot>
           <rim:Name>
3455         <rim:LocalizedString charset="UTF-8" value="Celebrity"
xml:lang="en-us"/>
           </rim:Name>
           <rim:Description/>
           </rim:Classification>
           <rim:Classification
3460         classificationScheme="urn:uuid:a09d5840-386c-46f2-b5ad-
9c3699a4309d"
           classifiedObject="urn:uuid:08a15a6f-5b4a-42de-8f95-89474f83abdf"
           id="urn:uuid:b6e49c73-96c8-4058-8c95-914d83bd262a"
           nodeRepresentation="CDAR2/IHE 1.0"
           objectType="Urn:oasis:names:tc:ebxml-
3465         regrep:ObjectType:RegistryObject:Classification">
           <rim:Slot name="codingScheme">
3470             <rim:ValueList>
                 <rim:Value>Connect-a-thon formatCodes</rim:Value>
             </rim:ValueList>
           </rim:Slot>
           <rim:Name>
3475         <rim:LocalizedString charset="UTF-8" value="CDAR2/IHE 1.0"
xml:lang="en-us"/>
           </rim:Name>
           <rim:Description/>
           </rim:Classification>
           <rim:Classification

```

```

3480      classificationScheme="urn:uuid:f33fb8ac-18af-42cc-ae0e-
ed0b0bdb91e1"
classifiedObject="urn:uuid:08a15a6f-5b4a-42de-8f95-89474f83abdf"
id="urn:uuid:61e2b376-d74a-4984-ac21-dcd0b8890f9d"
nodeRepresentation="Emergency Department"
objectType="Urn:oasis:names:tc:ebxml-
3485 regrep:ObjectType:RegistryObject:Classification">
  <rim:Slot name="codingScheme">
    <rim:ValueList>
      <rim:Value>Connect-a-thon
healthcareFacilityTypeCodes</rim:Value>
    </rim:ValueList>
3490   </rim:Slot>
  <rim:Name>
    <rim:LocalizedString charset="UTF-8" value="Assisted Living"
xml:lang="en-us"/>
  </rim:Name>
  <rim:Description/>
3495 </rim:Classification>
  <rim:Classification
    classificationScheme="urn:uuid:ccc5598-8b07-4b77-a05e-
3500 ae952c785ead"
classifiedObject="urn:uuid:08a15a6f-5b4a-42de-8f95-89474f83abdf"
id="urn:uuid:fb7677c5-c42f-485d-9010-dce0f3cd4ad5"
nodeRepresentation="Cardiology"
objectType="Urn:oasis:names:tc:ebxml-
3505 regrep:ObjectType:RegistryObject:Classification">
  <rim:Slot name="codingScheme">
    <rim:ValueList>
      <rim:Value>Connect-a-thon practiceSettingCodes</rim:Value>
    </rim:ValueList>
  </rim:Slot>
3510   <rim:Name>
    <rim:LocalizedString charset="UTF-8" value="Cardiology"
xml:lang="en-us"/>
  </rim:Name>
  <rim:Description/>
3515 </rim:Classification>
  <rim:Classification
    classificationScheme="urn:uuid:f0306f51-975f-434e-a61c-
3520 c59651d33983"
classifiedObject="urn:uuid:08a15a6f-5b4a-42de-8f95-89474f83abdf"
id="urn:uuid:0a8a8ed9-8be5-4a63-9b68-a511adee8ed5"
nodeRepresentation="34098-4"
objectType="Urn:oasis:names:tc:ebxml-
3525 regrep:ObjectType:RegistryObject:Classification">
  <rim:Slot name="codingScheme">
    <rim:ValueList>
      <rim:Value>LOINC</rim:Value>
    </rim:ValueList>
  </rim:Slot>
3530   <rim:Name>
    <rim:LocalizedString
      charset="UTF-8"
      value="Conference Evaluation Note" xml:lang="en-
us"/>
  </rim:Name>
  <rim:Description/>
3535 </rim:Classification>
  <rim:ExternalIdentifier
    id="urn:uuid:db9f4438-ffff-435f-9d34-d76190728637"
    registryObject="urn:uuid:08a15a6f-5b4a-42de-8f95-89474f83abdf"
    identificationScheme="urn:uuid:58a6f841-87b3-4a3e-92fd-
3540 a8ffeff98427"
    objectType="ExternalIdentifier"
    value="st3498702^^^&1.3.6.1.4.1.21367.2005.3.7&ISO">
3545   <rim:Name>
    <rim:LocalizedString

```

```

                                charset="UTF-8"
                                value="XSDDocumentEntry.patientId"
                                xml:lang="en-us"/>
3550     </rim:Name>
          <rim:Description/>
        </rim:ExternalIdentifier>
        <rim:ExternalIdentifier
          id="urn:uuid:c3fcfb0e-9765-4f5b-abaa-b37ac8ff05a5"
          registryObject="urn:uuid:08a15a6f-5b4a-42de-8f95-89474f83abdf"
3555     8640a32e42ab"
          identificationScheme="urn:uuid:2e82c1f6-a085-4c72-9da3-

          objectType="ExternalIdentifier"
          value="1.3.6.1.4.1.21367.2005.3.99.1.1010">
3560     <rim:Name>
          <rim:LocalizedString
                                charset="UTF-8"
                                value="XSDDocumentEntry.uniqueId"
                                xml:lang="en-us"/>
          </rim:Name>
          <rim:Description/>
3565     </rim:ExternalIdentifier>
        </rim:ExtrinsicObject>
        <rim:ObjectRef xmlns:q="urn:oasis:names:tc:ebxml-regrep:xsd:query:3.0"
3570     xmlns:rims="urn:oasis:names:tc:ebxml-regrep:xsd:rims:3.0" id="urn:uuid:41a5887f-8865-4c09-adf7-
e362475b143a"/>
          <rim:ObjectRef xmlns:q="urn:oasis:names:tc:ebxml-regrep:xsd:query:3.0"
          xmlns:rims="urn:oasis:names:tc:ebxml-regrep:xsd:rims:3.0" id="urn:uuid:f4f85eac-e6cb-4883-b524-
f2705394840f"/>
3575     <rim:ObjectRef xmlns:q="urn:oasis:names:tc:ebxml-regrep:xsd:query:3.0"
          xmlns:rims="urn:oasis:names:tc:ebxml-regrep:xsd:rims:3.0" id="urn:uuid:a09d5840-386c-46f2-b5ad-
9c3699a4309d"/>
          <rim:ObjectRef xmlns:q="urn:oasis:names:tc:ebxml-regrep:xsd:query:3.0"
          xmlns:rims="urn:oasis:names:tc:ebxml-regrep:xsd:rims:3.0" id="urn:uuid:f33fb8ac-18af-42cc-ae0e-
ed0b0bdb91e1"/>
3580     <rim:ObjectRef xmlns:q="urn:oasis:names:tc:ebxml-regrep:xsd:query:3.0"
          xmlns:rims="urn:oasis:names:tc:ebxml-regrep:xsd:rims:3.0" id="urn:uuid:ccccf5598-8b07-4b77-a05e-
ae952c785ead"/>
          <rim:ObjectRef xmlns:q="urn:oasis:names:tc:ebxml-regrep:xsd:query:3.0"
3585     xmlns:rims="urn:oasis:names:tc:ebxml-regrep:xsd:rims:3.0" id="urn:uuid:f0306f51-975f-434e-a61c-
c59651d33983"/>
          <rim:ObjectRef xmlns:q="urn:oasis:names:tc:ebxml-regrep:xsd:query:3.0"
          xmlns:rims="urn:oasis:names:tc:ebxml-regrep:xsd:rims:3.0" id="urn:uuid:58a6f841-87b3-4a3e-92fd-
a8ffeff98427"/>
3590     <rim:ObjectRef xmlns:q="urn:oasis:names:tc:ebxml-regrep:xsd:query:3.0"
          xmlns:rims="urn:oasis:names:tc:ebxml-regrep:xsd:rims:3.0" id="urn:uuid:2e82c1f6-a085-4c72-9da3-
8640a32e42ab"/>
        </rim:RegistryObjectList>
      </AdhocQueryResponse>

```

3595 The following query response is the same as above (repeated sections replaced with ... ) with the homeCommunityId attribute specified, in bold for readability. Subsequent requests specifying entryUUID of urn:uuid:08a15a6f-5b4a-42de-8f95-89474f83abdf or uniqueID of 1.3.6.1.4.1.21367.2005.3.99.1.1010 shall include the homeCommunityId value of urn:oid:1.2.3 in the query.

3600

3605

```
<?xml version="1.0" encoding="UTF-8"?>
<AdhocQueryResponse ... status="Success">
  <rim:RegistryObjectList>
    <rim:ExtrinsicObject ... id="urn:uuid:08a15a6f-5b4a-42de-8f95-89474f83abdf"
isOpaque="false" mimeType="text/xml" objectType="urn:uuid:7edca82f-054d-47f2-a032-9b2a5b5186c1"
status="urn:oasis:names:tc:ebxml-regrep:StatusType:Approved" home="urn:oid:1.2.3">
```

3610

"

3615

```

    <rim:ExternalIdentifier id="urn:uuid:c3fcbf0e-9765-4f5b-abaa-b37ac8ff05a5"
registryObject="urn:uuid:08a15a6f-5b4a-42de-8f95-89474f83abdf"
identificationScheme="urn:uuid:2e82c1f6-a085-4c72-9da3-8640a32e42ab"
objectType="ExternalIdentifier" value="1.3.6.1.4.1.21367.2005.3.99.1.1010">
      <rim:Name>
        <rim:LocalizedString charset="UTF-8" value="XSDDocumentEntry.uniqueId"
xml:lang="en-us"/>
      </rim:Name>
      <rim:Description/>
    </rim:ExternalIdentifier>
  </rim:ExtrinsicObject>
</rim:RegistryObjectList>
</AdhocQueryResponse>
```

3620

#### 3625 3.18.4.1.3.4 Intentionally Left Blank

#### 3.18.4.1.3.5 Basic Patient Privacy Enforcement Option

If the Basic Patient Privacy Enforcement Option is implemented:

3630

1. All Document Consumer Actors may provide a list of confidentialityCode in XDS Registry Stored Query Transaction and the XDS Registry will return only document that have at least one matching confidentialityCode. In this way documents without at least one of the requested codes will not be returned.

3635

2. The Document Consumer Actor shall be able to be configured with the Patient Privacy Policies, Patient Privacy Policy Identifiers (OIDs) and associated information necessary to understand and enforce the XDS Affinity Domain Policy. The details of this are product specific and not specified by IHE.

3640

3. The Document Consumer shall not allow access to documents for which the Document Consumer does not understand at least one of the confidentialityCode returned. This assures that a Document Consumer will not improperly handle documents with confidentialityCode that may be more restrictive than the Document Consumer is configured to support.

3645

4. The Document Consumer Actor shall abide by the XDS Affinity Domain Policies represented by the confidentialityCode in the metadata associated with the document. The Document Consumer Actor likely will have user access controls or business rule capabilities to determine the details of how confidentiality codes apply to query results. The details of this are product specific and not specified by IHE. These rules shall reduce the query results to only those that are appropriate to the current situation for that actor and user.

5. Note: The Registry is already required to return only documents that match the requested confidentialityCode (filter) indicated in the Registry Stored Query.

3650 6. Note: Products implementing the Document Registry Actor may be able to further filter Registry Stored Query results through looking at all the Patient Privacy Acknowledgement Documents registered for the patient that have the availabilityStatus of Approved and for which have not expired.

**3.18.4.1.3.6 Basic Patient Privacy Proof Option**

3655 If the Basic Patient Privacy Consents Proof Option is implemented:

1. The Document Consumer Actor shall be capable of querying for ‘Approved’ Patient Privacy Acknowledgement Documents in the XDS Affinity Domain. This query should be done by document class so as to catch both formats of document (Consent). The Document Consumer Actor shall be capable of recognizing the eventCodeList from the resulting XDS Metadata. There is no required handling of Patient Privacy Consent Acknowledgement Document XDS Metadata. There is no requirement for the Document Consumer to retrieve the Patient Privacy Acknowledgement Document content.

3660

**3.18.5 Security Considerations**

3665 Relevant XDS Affinity Domain Security background is discussed in the XDS Security Considerations Section (see ITI TF-1: 10.7).

**3.18.5.1 Audit Record Considerations**

The Registry Stored Query Transaction is a Query Information event as defined in Table 3.20.4.1.1.1-1. If a status of PartialSuccess is returned, the Actors involved shall record both a success and a failure audit event. The Actors involved shall record audit events according to the following:

3670

**3.18.5.1.1 Document Consumer audit message:**

	Field Name	Opt	Value Constraints
<b>Event</b> AuditMessage/ EventIdentification	EventID	M	EV(110112, DCM, “Query”)
	EventActionCode	M	“E” (Execute)
	EventDateTime	M	not specialized
	EventOutcomeIndicator	M	not specialized
	EventTypeCode	M	EV(“ITI-18”, “IHE Transactions”, “Registry Stored Query”)
<b>Source (Document Consumer) (1)</b>			
<b>Human Requestor (0..n)</b>			
<b>Destination (Document Registry) (1)</b>			
<b>Audit Source (Document Consumer) (1)</b>			
<b>Patient (0..1)</b>			
<b>Query Parameters(1)</b>			

Where:

<b>Source</b> AuditMessage/ ActiveParticipant	UserID	M	If Asynchronous Web Services Exchange is being used, the content of the <wsa:ReplyTo/> element. Otherwise, not specialized.
	AlternativeUserID	M	The process ID as used within the local operating system in the local system logs.
	<i>UserName</i>	<i>U</i>	<i>not specialized</i>
	<i>UserIsRequestor</i>	<i>U</i>	<i>not specialized</i>
	RoleIDCode	M	EV(110153, DCM, "Source")
	NetworkAccessPointTypeCode	M	"1" for machine (DNS) name, "2" for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Human Requestor (if known)</b> AuditMessage/ ActiveParticipant	UserID	M	Identity of the human that initiated the transaction.
	<i>AlternativeUserID</i>	<i>U</i>	<i>not specialized</i>
	<i>UserName</i>	<i>U</i>	<i>not specialized</i>
	<i>UserIsRequestor</i>	<i>U</i>	<i>not specialized</i>
	RoleIDCode	U	Access Control role(s) the user holds that allows this transaction.
	NetworkAccessPointTypeCode	<i>U</i>	<i>not specialized</i>
	NetworkAccessPointID	<i>U</i>	<i>not specialized</i>

3675

<b>Destination</b> AuditMessage/ ActiveParticipant	UserID	M	SOAP endpoint URI.
	<i>AlternativeUserID</i>	<i>U</i>	<i>not specialized</i>
	<i>UserName</i>	<i>U</i>	<i>not specialized</i>
	<i>UserIsRequestor</i>	<i>U</i>	<i>not specialized</i>
	RoleIDCode	M	EV(110152, DCM, "Destination")
	NetworkAccessPointTypeCode	M	"1" for machine (DNS) name, "2" for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Audit Source</b> AuditMessage/ AuditSourceIdentification	<i>AuditSourceID</i>	<i>U</i>	<i>not specialized</i>
	<i>AuditEnterpriseSiteID</i>	<i>U</i>	<i>not specialized</i>
	<i>AuditSourceTypeCode</i>	<i>U</i>	<i>not specialized</i>

<b>Patient</b> (AuditMessage/ ParticipantObjectIdentifi- cation)	ParticipantObjectTypeCode	M	"1" (Person)
	ParticipantObjectTypeCodeRole	M	"1" (Patient)
	<i>ParticipantObjectDataLifeCycle</i>	<i>U</i>	<i>not specialized</i>
	ParticipantObjectIDTypeCode	M	<i>not specialized</i>
	<i>ParticipantObjectSensitivity</i>	<i>U</i>	<i>not specialized</i>
	ParticipantObjectID	M	The patient ID in HL7 CX format.
	<i>ParticipantObjectName</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectQuery</i>	<i>U</i>	<i>not specialized</i>
<i>ParticipantObjectDetail</i>	<i>U</i>	<i>not specialized</i>	

<b>Query</b>	ParticipantObjectTypeCode	M	"2" (system object)
--------------	---------------------------	---	---------------------

	ParticipantObjectTypeCodeRole	M	“24” (query)
	ParticipantObjectDataLifeCycle	U	not specialized
	ParticipantObjectIDTypeCode	M	EV(“ITI-18”, “IHE Transactions”, “Registry Stored Query”)
	ParticipantObjectSensitivity	U	not specialized
	ParticipantObjectID	M	Stored Query ID (UUID)
	ParticipantObjectName	U	not specialized
	ParticipantObjectQuery	M	the AdhocQueryRequest, base64 encoded.
	ParticipantObjectDetail	C	The ParticipantObjectDetail element may occur more than once. In one element, set “QueryEncoding” as the value of the attribute <i>type</i> . Set the attribute <i>value</i> to the character encoding, such as “UTF-8”, used to encode the ParticipantObjectQuery before base64 encoding. In another element, set “urn:ihe:iti:xca:2010:homeCommunityId” as the value of the attribute <i>type</i> and the value of the homeCommunityID as the value of the attribute <i>value</i> , if known.

3680

### 3.18.5.1.2 Document Registry audit message:

	Field Name	Opt	Value Constraints
<b>Event</b> AuditMessage/ EventIdentification	EventID	M	EV(110112, DCM, “Query”)
	EventActionCode	M	“E” (Execute)
	EventDateTime	M	not specialized
	EventOutcomeIndicator	M	not specialized
	EventTypeCode	M	EV(“ITI-18”, “IHE Transactions”, “Registry Stored Query”)
<b>Source (Document Consumer) (1)</b>			
<b>Destination (Document Registry) (1)</b>			
<b>Audit Source (Document Registry) (1)</b>			
<b>Patient (0..1)</b>			
<b>Query Parameters(1)</b>			

Where:

<b>Source</b> AuditMessage/ ActiveParticipant	UserID	M	If Asynchronous Web Services Exchange is being used, the content of the <wsa:ReplyTo/> element. Otherwise, not specialized.
	AlternativeUserID	U	not specialized
	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	M	EV(110153, DCM, “Source”)
	NetworkAccessPointTypeCode	M	“1” for machine (DNS) name, “2” for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Destination</b> AuditMessage/ ActiveParticipant	UserID	M	SOAP endpoint URI.
	AlternativeUserID	M	The process ID as used within the local operating system in the local system logs.
	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	M	EV(110152, DCM, “Destination”)
	NetworkAccessPointTypeCode	M	“1” for machine (DNS) name, “2” for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Audit Source</b> (AuditMessage/ AuditSourceIdentification)	<i>AuditSourceID</i>	<i>U</i>	<i>not specialized</i>
	<i>AuditEnterpriseSiteID</i>	<i>U</i>	<i>not specialized</i>
	<i>AuditSourceTypeCode</i>	<i>U</i>	<i>not specialized</i>

<b>Patient</b> (AuditMessage/ ParticipantObjectIdentifi- cation)	<i>ParticipantObjectTypeCode</i>	<i>M</i>	"1" (Person)
	<i>ParticipantObjectTypeCodeRole</i>	<i>M</i>	"1" (Patient)
	<i>ParticipantObjectDataLifeCycle</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectIDTypeCode</i>	<i>M</i>	<i>not specialized</i>
	<i>ParticipantObjectSensitivity</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectID</i>	<i>M</i>	The patient ID in HL7 CX format.
	<i>ParticipantObjectName</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectQuery</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectDetail</i>	<i>U</i>	<i>not specialized</i>

3685

<b>Query Parameters</b> (AuditMessage/ ParticipantObjectIdentifi- cation)	<i>ParticipantObjectTypeCode</i>	<i>M</i>	"2" (system object)
	<i>ParticipantObjectTypeCodeRole</i>	<i>M</i>	"24" (query)
	<i>ParticipantObjectDataLifeCycle</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectIDTypeCode</i>	<i>M</i>	EV("ITI-18", "IHE Transactions", "Registry Stored Query")
	<i>ParticipantObjectSensitivity</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectID</i>	<i>M</i>	Stored Query ID (UUID)
	<i>ParticipantObjectName</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectQuery</i>	<i>M</i>	the AdhocQueryRequest, base64 encoded.
	<i>ParticipantObjectDetail</i>	<i>C</i>	The ParticipantObjectDetail element may occur more than once. In one element, set "QueryEncoding" as the value of the attribute <i>type</i> . Set the attribute <i>value</i> to the character encoding, such as "UTF-8", used to encode the ParticipantObjectQuery before base64 encoding. In another element, set "urn:ihe:iti:xca:2010:homeCommunityId" as the value of the attribute <i>type</i> and the value of the homeCommunityID as the value of the attribute <i>value</i> , if known.

### 3.19 Authenticate Node [ITI-19]

This section corresponds to Transaction 19 of the IHE ITI Technical Framework. Transaction 19 is used by the Secure Node Actors

3690


#### 3.19.1 Scope

In the Authenticate Node transaction, the local Secure Node presents its identity to a remote Secure Node, and authenticates the identity of the remote node. After this mutual authentication other secure transactions may take place through this secure pipe between the two nodes.

3695

In addition, the Secure Node authenticates the identity of the user who requests access to the node. This user authentication is a local operation that does not involve communication with a remote node.

#### 3.19.2 Use Case Roles

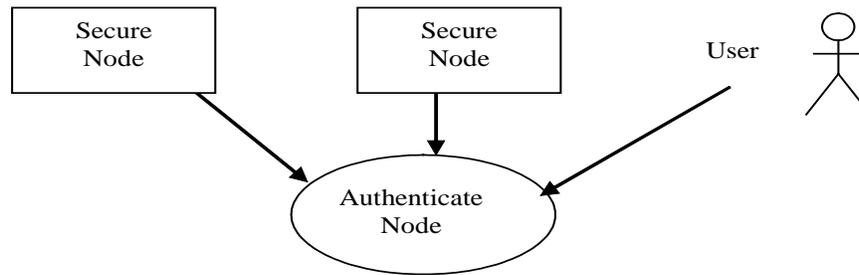

**Actor:** Secure Node

3700 **Role:** Establish a protocol specific trust relationship between two nodes in a network. Establishes the identity of a user, and authorizes access to the patient data and applications at the node.

**Actor:** User

**Role:** Someone who wants to have access to the data and applications available at the node.

### 3705 3.19.3 Referenced Standards

DICOM PS 3.15:  
Security Profiles. Annex B1: The Basic TLS Secure Transport Connection Profile.


IETF: Transport Layer Security (TLS) 1.0 (RFC 2246)

3710 ITU-T: Recommendation X.509 (03/00). "Information technology - Open Systems Interconnection - The directory: Public-key and attribute certificate frameworks"

RFC 3851 Secure/Multipurpose Internet Mail Extensions (S/MIME) Version 3.1 Message Specification

### 3.19.4 Interaction Diagram

Note: This diagram does not imply sequencing of Authentication Node and Local User Authentication.

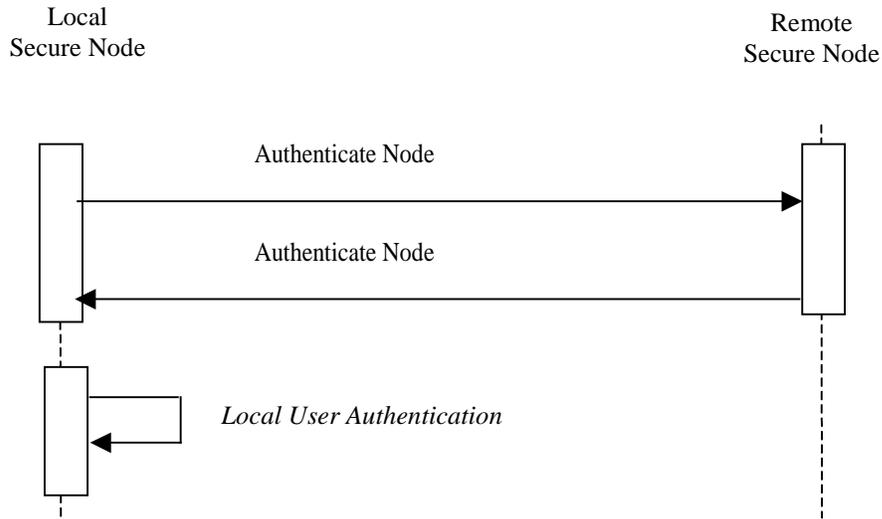

3715

### 3.19.5 Trigger Events

The Local Secure Node starts the authentication process with the Remote Secure Node when information exchange between the two nodes is requested. The first transaction shall be the Authenticate Node transaction, and all other PHI transactions performed by IHE actors shall be secure transactions. This authentication process is needed when a secure connection is established.

3720

The Basic Secure Node shall always apply the Authenticate Node process to every DICOM, HTTP, or HL7 connection.

### 3.19.6 Message Semantics

3725

The Authenticate node transaction involves the exchange of certificates representing the identities of the nodes. These identities are used to authenticate the nodes, to inform authorization, and audit logging.

#### 3.19.6.1 Certificate Validation

The local organization (e.g., XDS Affinity Domain) will make the choice of what mixture of chain of trust and direct comparison is used to authenticate communications. This may be entirely based on chaining trust to selected CAs, entirely based upon provision of node certificates for direct comparison, or a mixture of both.

3730

Note: The CAs used for ATNA chain of trust will be different than the default browser trusted list of CAs used for authenticating internet web servers. A worldwide CA, such as VeriSign, is not generally trusted to determine which individual nodes within an organization should and should not communicate patient identifiable information.

3735

When Authenticating the Remote Secure Node, the Local Secure Node:

- 3740
- Shall be able to perform certificate validation based on signature by a trusted CA (See Section 3.19.6.1.1) and
  - Shall be able to perform direct certificate validation to a set of trusted certificates (See Section 3.19.6.1.2)

It may reject communications when the certificate validation fails, or may restrict communications to only that which is appropriate for an unidentified other party.

3745 **3.19.6.1.1 Chain to a trusted certificate authority**

The Secure Node or Secure Application:

- Shall provide the means for configuring which CAs are trusted to authenticate node certificates for use in a chain of trust. These CAs shall be identified by means of the public signing certificate for the signing CA.
- 3750
- Shall support digital certificates encoded using both Deterministic Encoding Rules (DER) and Basic Encoding Rules (BER).
  - Shall accept communications for which there is a certificate that is signed by a CA that is listed as a trusted signing authority.

**3.19.6.1.2 Direct certificate validation**

3755 The Secure Node or Secure Application:

- Shall provide means for installing of the required certificates, for example, via removable media or network interchange (where the set of trusted certificates can be a mixture of CA signed certificates and self-signed certificates).
- 3760
- Shall support digital certificates encoded using both Deterministic Encoding Rules (DER) and Basic Encoding Rules (BER).
  - Shall accept communications for which there is a certificate configured as acceptable for direct certificate validation.

**3.19.6.1.3 Other Certificate requirements**

3765 The Secure Node shall not require any specific certificate attribute contents, nor shall it reject certificates that contain unknown attributes or other parameters. Note that for node certificates the CN often is a hostname, attempting to use this hostname provides no additional security and will introduce a new failure mode (e.g., DNS failure).

3770 The certificates used for mutual authentication shall be X509 certificates based on RSA key with key length in the range of 1024-4096, where the key length chosen is based on local site policy. Maximum expiration time acceptable for certificates should be defined in the applicable security policy. The IHE Technical Framework recommends a maximum expiration time of 2 years.

The method used to determine whether a node is authorized to perform transactions is not specified. This may be use of a set of trusted certificates, based on some attribute value contained

3775 in the certificates, access control lists, or some other method. Using a certificate chain back to an external trusted certificate authority to determine authorizations is strongly discouraged.

### **3.19.6.2 All Connections carrying Protected Information (PI)**

When configured for use on a physically secured network, the normal connection mechanisms may be used.

3780 When configured for use not on a physically secured network implementations shall use the TLS protocol, and the following ciphersuite shall be supported:

TLS\_RSA\_WITH\_AES\_128\_CBC\_SHA.

3785 The recommended "well-known port 2762" as specified by DICOM shall be used when the Secure node is configured for use not on a physically secured network. When the secure node is configured for use on a physically secured network, a different port number shall be used, preferably the standard port 104. HL7 does not specify port numbers, but the port number used when configured for use on a physically secured network shall be different than the port number used when configured for use not on a physically secured network.

3790 All Secure Nodes shall be configurable for use on a physically secured network or not on a physically secured network. If Secure Node is configured for physical security, then it may use the non-TLS DICOM port and protocol.

### **3.19.6.3 This Header is empty to preserve header numbering**

### **3.19.6.4 Web-Services carrying Protected Information(PI)**

3795 A trusted association shall be established between the two nodes utilizing WS-I Basic Security Profile Version 1.1. This association will be used for all secure transactions between the IHE actors in the two nodes. Note that Section 3.19.6.2 "All Connections carrying Protected Information (PI)" and WS-I Basic Security Profile – Section 3 "Transport Layer Mechanisms" (i.e., <http://ws-i.org/profiles/basic-security/1.1/transport>) are identical and interoperable.

### **3.19.6.5 SMTP communication**

3800 When configured to use email on a network that is not physically secured, implementations shall use S/MIME (RFC 3851):

- 3805 • The message shall be signed using the signedData format (i.e., encapsulated signature rather than multipart/signed format for detached signature) making the signature verification easier for the remote node. The email shall be digitally signed by the sender, by a one level only detached signature. This digital signature shall be interpreted to mean that the sender is attesting to their authorization to disclose the information to the intended recipient(s). RSA/SHA-1 signature shall be supported by both the sender and the receiver.
- All the certificates of the "trust chain" shall be contained within the signature when using a PKI or out of bound certificate.

3810 The following ciphersuites shall also be supported for encrypted email:

- S/MIME\_RSA\_WITH\_AES\_128\_CBC\_SHA (sender).
  - S/MIME\_RSA\_WITH\_3DES\_128\_CBC\_SHA (sender and receiver). Receivers must be able to receive older encryption methods, but for IHE Authenticate Node compliance the sender will use AES.
- 3815      • The email shall be digitally signed by the sender, by a one level only detached signature, applied BEFORE the encryption. This digital signature shall be interpreted to mean that the sender is attesting to their authorization to disclose the information to the intended recipient(s).

3820      As explained in S/MIME, the sender will generate a unique session key, encrypt the payload of the message using the symmetrical AES algorithm, encrypt the key using the RSA asymmetrical algorithm with each one of receiver(s) public key and attach the result to the message. Each one of the receiver(s) will decrypt this result using its private key, revealing the session key, and decrypt the payload of the message.

This profile does not specify how certificates and keys are obtained or exchanged.

### 3825      **3.19.7 Local User Authentication**

The Secure Node starts the authentication process with a User when the User wants to log on to the node. The secure node shall not allow access to PHI to an operator who has not successfully completed the local user authentication. Local user authentication is not an IHE specified network transaction, although it may utilize a network system for user authentication.

3830      This is a local invocation of functions at the Secure Node. The identity of the User will be established by the Secure Node Actor based on methods such as:

- Username with Password
  - Biometrics
  - Smart card
- 3835      • Magnetic Card

The User shall log in using his or her own unique individually assigned identity. Identities must be unique across the secure domain. A user may have more than one identity. The Secure Node shall be configurable to maintain a list of authorized users for the Secure Node.

3840      The rules for assignment of unique individual identities to users is part of the Security Policy of the healthcare enterprise. Development of these rules is outside the scope of the IHE Technical Framework. The following examples list a few special cases related to user identification that may occur in practice.

#### **3.19.7.1 Example: Team approach**

3845      When the operator is part of a team performing a procedure, the other members of the team involved in creating and accessing the data should be manually identified and recorded in the procedure log (which may be paper or electronic), and it is assumed that all have accessed the

data even though they were not (and cannot be in most cases) actually logged on to the piece of equipment.

3850 During some procedures, it may be necessary for one operator to relieve the operator who has already been authenticated by the system. It is recommended that the first operator log off and that the system authenticate the new operator.

The audit log supports identification of the active participant. This is often defined as one key member of the team. Other means are used to track the entry and exit of various members of the team. IHE does not specify any specific team identification process.

3855 **3.19.7.2 Example: Access to locked exam room, no user logon on modality.**

There may be situations where the acquisition modality has no user logon features, and access to the equipment is controlled by controlling access to the examination room. In these situations an equipment-specific user ID will be used, and access to the room should be recorded in the procedure log (which may be paper or electronic).

3860 **3.19.7.3 Example: Enterprise User Authentication**

The healthcare enterprise may implement local user authentication using the Enterprise User Authentication Profile (EUA). This implementation may be mixed with other non-EUA access to the secure domain, based upon each node's internal use an EUA availability.

3865

### 3.20 Record Audit Event [ITI-20]

3870 This section corresponds to the Record Audit Event [ITI-20] transaction of the IHE IT Infrastructure Technical Framework. This transaction is used to report auditable events to an Audit Record Repository.

#### 3.20.1 Scope

This transaction is used to report auditable events to an Audit Record Repository.

#### 3.20.2 Actor Roles

3875

**Figure 3.20.2-1: Use-case Diagram**

**Table 3.20.2-1: Actor Roles**


<b>Actor:</b>	Any actor or any other application that is grouped with the Secure Node Actor or Secure Application Actor.
<b>Role:</b>	Create an audit record and transmit this record to the Audit Record Repository.
<b>Actor:</b>	Audit Record Repository
<b>Role:</b>	Receive an audit record from the Audit Record Creator and store this for audit purposes.
<b>Actor:</b>	Audit Record Forwarder
<b>Role:</b>	Forward an audit record to Audit Record Repositories.

#### 3880 3.20.3 Referenced Standards

RFC 5424	The Syslog Protocol.
RFC 5425	Transmission of Syslog Messages over TLS

RFC 5426	Transmission of Syslog Messages over UDP
DICOM	DICOM PS 3.15 Annex A.5 <a href="http://medical.nema.org/medical/dicom/current/output/chtml/part15/sect_A.5.html">http://medical.nema.org/medical/dicom/current/output/chtml/part15/sect_A.5.html</a>
ASTM E2147-01	Standard Specification for Audit and Disclosure Logs for Use in Health Information Systems
NIST SP 800-92	Guide to Computer Security Log Management.
W3C XML 1.0	Extensible Markup Language (XML) 1.0

### 3.20.4 Interaction Diagram

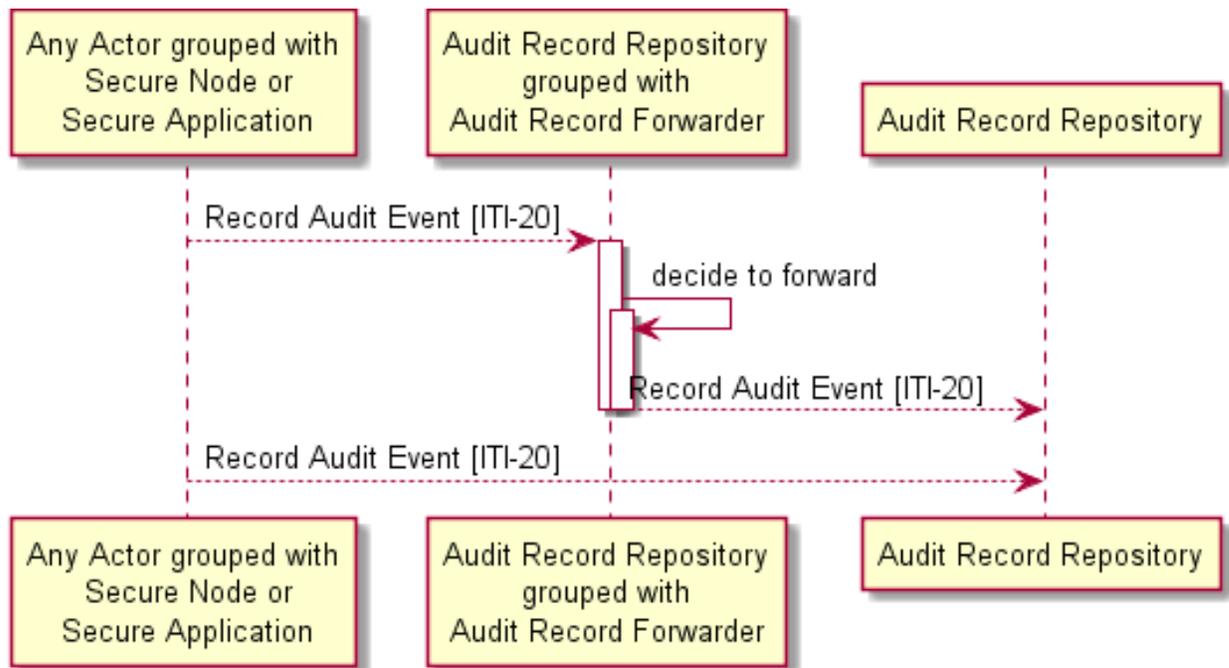

3885 **Note 1:** Any actor initiating [ITI-20] may send to more than one Audit Record Repository.

**Note 2:** The Audit Repository that receives an [ITI-20] transaction may or may not be grouped with an Audit Record Forwarder. This diagram does not show a chain of forwarding between actors.

#### 3890 3.20.4.1 Audit Event message

An actor that is grouped with Secure Node or Secure Application detects an event that should be reported and uses the Audit Event message to send a report about the event to an Audit Record Repository.

3895 This Audit Event message uses the Syslog protocol defined by RFC 5424. The Syslog protocol is also used for a wide variety of other event reporting purposes.

RFC 5424 defines a Syslog message that includes a free-form message. This Audit Event constrains the Syslog message to use a DICOM schema to specify the message content. See Section 3.20.7.

3900 DICOM has defined a basic event report schema, and some basic event descriptions. IHE has extended this to define other specific event reports for security and privacy events. The Audit Event messages defined in this transaction can be mixed together with other Syslog messages. Organizations and systems may also be using these event schema for reporting events not defined by IHE or DICOM.

3905 The Audit Record Repository and Audit Record Forwarder should be prepared to handle Syslog messages in other formats, as well as messages complying with the IHE Audit Trail Format (defined in Section 3.20.7) that are being used for other purposes.

#### **3.20.4.1.1 Trigger Events**

There are two trigger events:

- 3910 1. A Secure Node or Secure Application detects an event that should be reported to the Audit Record Repository. This transaction does not specify all of the policies or reasons for reporting events. They may be specified in other IHE profiles, they may be specified by local law or regulation, or they may be specified by local policy.
- 3915 2. An Audit Record Forwarder determines that a received Syslog message should be sent to another Audit Record Repository. This transaction does not specify what rules or policies determine whether a Syslog message should be forwarded.

The Secure Node or Secure Application shall create the Audit Event message and transmit it to the Audit Record Repository as soon as possible.

The Audit Record Forwarder shall forward the Audit Event message to the Audit Record Repository as soon as possible.

3920 If the Secure Application, Secure Node, or Audit Record Forwarder actor is unable to send the message to the Audit Record Repository (e.g., it has lost network connectivity or has lost the TLS connection to the Audit Record Repository), then the actor shall store the audit record locally and send it when it is able.

3925 The Audit Record Forwarder may delete its local copy of the Audit Record after this record has been transmitted to the target Audit Record Repository.

#### **3.20.4.1.1.1 DICOM and IHE Audit Event messages**

3930 An actor in any IHE profile, when grouped with a Secure Node or Secure Application actor, shall be able to report the events defined in Table 3.20.4.1.1.1-1 (previously Table 3.20.6-1). Additional reportable events are often identified for specific events in other IHE profiles, and are documented in that profile or transaction.

These events in this table shall be formatted in accordance with Section 3.20.7.

**Table 3.20.4.1.1.1-1 Audit Event triggers (previously Table 3.20.6-1)**

<b>Audit Event Trigger</b>	<b>Description</b>	<b>Source Vocabulary</b>
Actor-start-stop	Startup and shutdown of any actor. Applies to all actors. Is distinct from hardware powerup and shutdown.	DICOM PS 3.15 A.5.3 “Application Activity”
Audit-Log-Used	The audit trail repository has been accessed or modified by something other than the arrival of audit trail messages.	DICOM PS 3.15 A.5.3 “Audit Log Used”
Begin-storing-instances	Begin storing SOP Instances for a study. This may be a mix of instances.	DICOM PS 3.15 A.5.3 “Begin Transferring DICOM Instances”
Health-service-event	Health services scheduled and performed within an instance or episode of care. This includes scheduling, initiation, updates or amendments, performing or completing the act, and cancellation. See note below.	IHE Extension (ITI TF-2a: 3.20.7.3) “Health Services Provision Event”
Instances-deleted	SOP Instances are deleted from a specific study. One event covers all instances deleted for the particular study.	DICOM PS 3.15 A.5.3 “DICOM Instances Accessed” or “DICOM Study Deleted”
Instances-Stored	Instances for a particular study have been stored on this system. One event covers all instances stored for the particular study.	DICOM PS 3.15 A.5.3 “DICOM Instances Transferred”
Medication	Medication orders and administration within an instance or episode of care. This includes initial order, dispensing, delivery, and cancellation. See note below.	IHE Extension (ITI TF-2a: 3.20.7.3) “Medication Event”
Mobile-machine-event	Mobile machine joins or leaves secure domain.	DICOM PS 3.15 A.5.3 “Network Entry”
Node-Authentication-failure	A secure node authentication failure has occurred during TLS negotiation, e.g., invalid certificate.	DICOM PS 3.15 A.5.3 “Security Alert”
Order-record-event	Order record created, accessed, modified or deleted. Involved actors: Order Placer. This includes initial order, updates or amendments, delivery, completion, and cancellation. See note below.	DICOM PS 3.16 Annex D “Order Record”
Patient-care-assignment	Staffing or participant assignment actions relevant to the assignment of healthcare professionals, caregivers attending physician, residents, medical students, consultants, etc. to a patient. It also includes change in assigned role or authorization, e.g., relative to healthcare status change, and de-assignment	IHE Extension (ITI TF-2a: 3.20.7.3) “Patient Care Resource Assignment”
Patient-care-episode	Specific patient care episodes or problems that occur within an instance of care. This includes initial assignment, updates or amendments, resolution, completion, and cancellation. See note below.	IHE Extension (ITI TF-2a: 3.20.7.3) “Patient Care Episode”
Patient-care-protocol	Patient association with a care protocol. This includes initial assignment, scheduling, updates or amendments, completion, and cancellation. See note below.	IHE Extension (ITI TF-2a: 3.20.7.3) “Patient Care Protocol”
Patient-record-event	Patient record created, modified, or accessed.	DICOM PS 3.16 Annex D “Patient Record”
PHI-export	Any export of PHI on media, either removable physical media such as CD-ROM or electronic transfer of files such as email. Any printing activity, paper or film, local or	DICOM PS 3.15 A.5.3 “Export”

Audit Event Trigger	Description	Source Vocabulary
	remote, which prints PHI.	
PHI-import	Any import of PHI on media, either removable physical media such as CD-ROM or electronic transfers of files such as email.	DICOM PS 3.15 A.5.3 "Import"
Procedure-record-event	Procedure record created, modified, accessed or deleted.	DICOM PS 3.16 Annex D "Procedure Record"
Query Information	<p>A query has been received, either as part of an IHE transaction, or as part other products functions. For example:</p> <ol style="list-style-type: none"> <li>1) Modality Worklist Query</li> <li>2) Instance or Image Availability Query</li> <li>3) PIX, PDQ, or XDS Query</li> </ol> <p>Notes: The general guidance is to log the query event with the query parameters and not the result of the query. The result of a query may be very large and is likely to be of limited value vs. the overhead. The query parameters can be used effectively to detect bad behavior and the expectation is that given the query parameters the result could be regenerated if necessary.</p>	DICOM PS 3.15 A.5.3 "Query"

Audit Event Trigger	Description	Source Vocabulary
Security Alert	<p>Security Administrative actions create, modify, delete, query, and display the following:</p> <p>Configuration and other changes, e.g., software updates that affect any software that processes protected information.</p> <p>Hardware changes may also be reported in this event.</p> <ol style="list-style-type: none"> <li>1. Security attributes and auditable events for the application functions used for patient management, clinical processes, registry of business objects and methods (e.g., WSDL, UDDI), program creation and maintenance, etc.</li> <li>2. Security domains according to various organizational categories such as entity-wide, institutional, departmental, etc.</li> <li>3. Security categories or groupings for functions and data such as patient management, nursing, clinical, etc.</li> <li>4. The allowable access permissions associated with functions and data, such as create, read, update, delete, and execution of specific functional units or object access or manipulation methods.</li> <li>5. Security roles according to various task-grouping categories such as security administration, admissions desk, nurses, physicians, clinical specialists, etc. It also includes the association of permissions with roles for role-based access control.</li> <li>6. User accounts. This includes assigning or changing password or other authentication data. It also includes the association of roles with users for role-based access control, or permissions with users for user-based access control.</li> <li>7. Unauthorized user attempt to use security administration functions.</li> <li>8. Audit enabling and disabling.</li> <li>9. User authentication revocation.</li> <li>10. Emergency Mode Access (aka Break-Glass)</li> </ol> <p>Security administration events should always be audited.</p>	DICOM PS 3.15 A.5.3 "Security Alert"
User Authentication	This message describes the event of a user log on or log off, whether successful or not. No Participant Objects are needed for this message.	DICOM PS 3.15 A.5.3 "User Authentication". For log off based on inactivity, specify UserIsRequestor=false in the User element to indicate that this was not user initiated.
Study-Object-Event	Study is created, modified, accessed, or deleted. This reports on addition of new instances to existing studies as well as creation of new studies.	DICOM PS 3.15 A.5.3 "DICOM Instances Accessed"
Study-used	SOP Instances from a specific study are created, modified or accessed. One event covers all instances used for the particular study.	DICOM PS 3.15 A.5.3 "DICOM Instances Accessed"

### **3.20.4.1.1.2 Other event reports**

3935 A Secure Node or Secure Application may also report audit events that do not correspond to DICOM events or audit events defined in IHE profiles.

These events may be reported using extensions to the format in Section 3.20.7 or may be reported in another format.

### **3.20.4.1.2 Message Semantics**

3940 The Audit Event message describes an event performed by users or systems. Typical events are queries, views, additions, deletions and changes to data.

An Audit Record Forwarder shall filter and forward Syslog messages unchanged, regardless of their internal format.

3945 A Secure Node or Secure Application shall create and transmit an Audit Event message when reporting an event. This message shall be a Syslog message that is transmitted as described in RFC 5424 and formatted as described in Section 3.20.7 Audit Message Format.

Secure Node and Secure Application Actors shall construct the Audit Event message according to the following:

- 3950 1. If the message contains Unicode characters, the characters shall be encoded using the UTF-8 encoding rules. UTF-8 avoids utilizing the control characters that are mandated by the Syslog protocol, but it may appear to be gibberish to a system that is not prepared for UTF-8.
- 3955 2. The PRI field shall be set using the facility value of 10 (security/authorization messages). Most Audit Event messages should have the severity value of 5 (normal but significant), although applications may choose values of 4 (Warning condition) if that is appropriate to the more detailed information in the audit message. This means that for most Audit Event messages the PRI field will contain the value “<85>”.
- 3960 3. The MSGID field in the HEADER of the SYSLOG-MSG shall be set to “IHE+RFC-3881” (minus the quotes). (Note that the use of RFC 3881 in the value is retained for backward compatibility.)
- 3965 4. The STRUCTURED-DATA is not used. The MSG field holds the structured event data.
5. The MSG field of the SYSLOG-MSG shall be present and shall be an XML structure using UTF-8 minimal length encoding following the DICOM PS3.15 A.5 format, as described in Section 3.20.7 Audit Message Format. The BOM as specified in RFC 5424 for use when the MSG is UTF-8 encoded is discouraged, but acceptable, as this is not well supported and discouraged by Unicode.

### **3.20.4.1.2.1 Audit Message Transports**

This transaction defines two transport mechanisms for Record Audit Event messages:

- 3970
6. Transmission of Syslog messages over TLS (RFC 5425) with The Syslog Protocol (RFC 5424) which formalizes sending Syslog messages over a streaming protocol protectable by TLS. See Section 3.20.4.1.2.1.1.
  7. Transmission of Syslog messages over UDP (RFC 5426) with The Syslog Protocol (RFC 5424) which formalizes and obsoletes BSD Syslog protocol defined in RFC 3164. See Section 3.20.4.1.2.1.2.

3975 The Audit Record Repository shall support both transport mechanisms.

The Secure Node, Secure Application, and Audit Record Forwarder Actors shall support at least one of the transport mechanisms.

#### **3.20.4.1.2.1.1 Transmission of Syslog Messages over TLS**

3980 Transmission of Syslog messages over TLS (RFC 5425) with the Syslog Protocol (RFC 5424) formalizes sending Syslog messages over a streaming protocol protectable by TLS.

RFC 5424 states that this MUST be TLS version 1.2. For this transaction, that requirement is relaxed to be that it MUST be TLS; version 1.2 is RECOMMENDED.

#### **3.20.4.1.2.1.2 Transmission of Syslog Messages over UDP (formerly:BSD Syslog)**

3985 Transmission of Syslog Messages over UDP (RFC 5426) with The Syslog Protocol (RFC 5424) formalizes and obsoletes the BSD Syslog protocol (RFC 3164). This transport mechanism, originally defined in the IHE Radiology Technical Framework, is appropriate in some situations.

3990 The underlying UDP transport may truncate messages longer than 1024 bytes or the MTU size minus the UDP header length. The Audit Record Repository shall accept arbitrarily truncated messages. The Audit Record Repository shall modify truncated messages so that such messages are well-formed XML (e.g., closing open elements), including possibly partial multi-byte encodings of characters.

Because of the potential for truncated messages and other security concerns, the transmission of Syslog messages over TLS is recommended.

#### **3.20.4.1.2.1.3 Reliable Syslog (deprecated)**

3995 The Reliable Syslog “cooked” mode is no longer specified by this transaction. Applications using Reliable Syslog should switch to transmission of Syslog Messages over TLS.

#### **3.20.4.1.3 Expected Actions**

4000 An Audit Record Repository (ARR) shall accept any Syslog message that complies with RFC 5424. For each Syslog message it may:

1. Discard the Syslog message as irrelevant.
2. Retain the Syslog message in an internal data store.
3. Perform other processing on the Syslog message.

4005 Audit Record Repositories shall accept UTF-8 encodings and store them without damage, i.e., preserve all 8 bits.

Audit Record Forwarders shall accept UTF-8 encodings and forward them without damage, i.e., preserve all 8 bits.

4010 This transaction does not constrain the kind of Syslog messages that can be conveyed, nor does it specify the capacity or capabilities of the data store in the Audit Record Repository. The expectation is that the internal data store on the Audit Record Repository will be used for subsequent analysis and reporting purposes. This transaction does not specify what such activities will be.

4015 The Audit Record Repository may apply a variety of data retention rules to the data store. This transaction does not specify data retention rules. These are usually dependent upon the purposes assigned to a specific Audit Record Repository.

When the Audit Record Repository is grouped with an Audit Record Forwarder, the Audit Record Forwarder shall:

1. Apply filtering rules to all Syslog messages received by the Audit Record Repository.
2. Forward all Syslog messages that match filters to their configured destinations.

### 4020 **3.20.5 Security Considerations**

The use of the TLS transport mechanism is recommended because the audit event messages often contain PHI or other sensitive information. See Section 3.20.4.1.2.1.

4025 The use of the TLS transport mechanism is not always required because there are other means of protection that may be more appropriate in some situations. The decision to use the UDP transport mechanism should be based upon a security and privacy risk analysis.

The data store within the Audit Record Repository may contain sensitive information, and the Audit Record Repository analysis facilities may allow sensitive queries. It will be a high value target for malicious actors, and should be protected accordingly.

4030 The Audit Record Repository is required to generate audit event messages for various kinds of use of the data store and configuration changes. This is specified in Section 3.20.4.1.1.

### **3.20.6 Retired**

This section has been retired. Most of the previous content has been moved to Section 3.20.4. Table 3.20.6-1 "Audit Record trigger events" is now Table 3.20.4.1.1.1-1.

### 4035 **3.20.7 Audit Message Format**

All IHE actors shall utilize the IHE Audit Trail Message Format in Section 3.20.7.1. This is a schema based on the standards developed and issued by the IETF, HL7®, and DICOM organizations to meet the medical auditing needs as specified by ASTM E2147-01.

Note: The IHE Provisional Audit Message Format has been retired.

4040 **3.20.7.1 IHE Audit Trail Message Format**

The DICOM Standard, Part 15, Annex A.5 Audit Trail Message Format Profile (see [http://medical.nema.org/medical/dicom/current/output/chtml/part15/sect\\_A.5.html](http://medical.nema.org/medical/dicom/current/output/chtml/part15/sect_A.5.html)) provides vocabulary and specification of a schema for events that may occur in the context of DICOM equipment. This XML schema was defined based upon joint work by IHE, HL7, DICOM, 4045 ASTM E31, and the Joint NEMA/COCIR/JIRA Security and Privacy Committee.

The DICOM Standard provides a schema for the basic messages and states that extensions are valid. This profile does not restrict private extensions that comply with the W3C XML encoding rules for the use of schemas, namespaces, etc.

4050 IHE has extended the DICOM audit schema for more general healthcare use. Some IHE profiles have defined additional events and appropriate audit event messages for those events. Those audit event messages are often directly associated with IHE transactions. The events are documented in the context of those transactions, and are not documented as part of this transaction.

4055 These audit requirements may be found in the Technical Frameworks from any IHE domain, not just the ITI domain. The notation used in this documentation, which often is in the form of an audit message table, is that used in the DICOM standard. The messages shall be encoded as instances based on the DICOM schema.

4060 The IHE Audit Trail Message Format describes events with respect to a single patient. In situations where there is an event that applies to more than one identifiable patient, there shall be a separate audit event message for each patient.

**3.20.7.1.1 RoleIDCode with access control roles**

When describing a human user's participation in an event, the RoleIDCode value should represent the access control roles/permissions that authorized the event. RoleIDCode is a CodedValueType. Use of standards-based roles/permissions is recommended, rather than use of 4065 site or application specific codes. Many older security systems are unable to produce this data, hence it is optional, but should be provided when known.

For example: at a site "St Fraser" they have defined a functional role code "NURSEA" for attending nurse. This can be represented as

EV("NURSEA", "St Fraser", "Attending Nurse")

4070 Candidate standards based structural/functional role codes can be found at ISO, HL7, ASTM, and various other sources.

**3.20.7.1.2 Audit Encoding of the Purpose of Use value**

4075 The Purpose of Use value in the schema indicates the expected ultimate use of the data, rather than a likely near term use such as "send to X". As explained in the [IHE Access Control White Paper](#), there are Access Control decisions that are based on the ultimate use of the data. For example a Patient may have provided a BPPC Consent/Authorization for treatment purposes, but explicitly disallowed any use for research regardless of de-identification methods used.

4080 The Purpose Of Use is also included in the Audit Event message to enable some forms of reporting of Accounting of Disclosures and Breach Notification. To enable this type of Audit Logging and Access Control decision, the assertion in the Provide User Assertion [ITI-40] transaction in the Cross-Enterprise User Assertion (XUA) Profile includes the intended purpose for which the data will be used. One specific PurposeOfUse would be a “Break-Glass”/Emergency-Mode-Access.

4085 The PurposeOfUse value will come from a Value Set. This Value Set should be derived from the codes found in ISO 14265, or XSPA (Cross-Enterprise Security and Privacy Authorization). Implementations should expect that the Value Set used may be using locally defined values. The use of the IHE Sharing of Value Sets (SVS) Profile may assist with this.

When a PurposeOfUse value is available it shall be encoded in the EventIdentification section as “PurposeOfUse” element encoded as a CodedValueType.

4090 For example, the following is how an explicit Disclosure can be recorded when an application knows that the act meets the measure of a Disclosure in the legal domain.

	Field Name	Opt	Value Constraints
<b>Event</b> AuditMessage/ EventIdentification	EventID	M	EV(110106, DCM, “Export”)
	EventActionCode	M	“R” (Read)
	EventDateTime	M	<i>not specialized</i>
	EventOutcomeIndicator	M	<i>not specialized</i>
	PurposeOfUse	O	EV(12, 1.0.14265.1, “Law Enforcement”)
	EventTypeCode	M	EV(“IHE0006”, “IHE”, “Disclosure”)
Source (Document Repository) (1)			
Destination (Document Consumer) (1)			
Audit Source (Document Repository) (1)			
Document (1..n)			

### 3.20.7.1.3 ParticipantObjectIDTypeCode

4095 The DICOM schema mandates codeSystemName and originalText for all coded types. When standard codes are not available and the Audit Event Report is still using the integer values that were specified in RFC 3881, IHE actors shall use the integer from RFC 3881 as the codeValue, the description from RFC 3881 in the originalText attribute and “RFC-3881” in the codeSystemName attribute. Where codes from other coding systems are available, those codes should be used because RFC 3881 has been deprecated.

### 4100 3.20.7.2 RFC 3881 format (Deprecated)

The use of RFC 3881 has been deprecated by IHE and IETF.


4105 **3.21 Patient Demographics Query [ITI-21]**

This section corresponds to Transaction ITI-21 of the IHE IT Infrastructure Technical Framework. Transaction ITI-21 is used by the Patient Demographics Consumer and Patient Demographics Supplier Actors.

**3.21.1 Scope**

4110 This transaction involves a request by the Patient Demographics Consumer Actor for information about patients whose demographic data match data provided in the query message. The request is received by the Patient Demographics Supplier Actor. The Patient Demographics Supplier Actor immediately processes the request and returns a response in the form of demographic information for matching patients.

4115 **3.21.2 Use Case Roles**

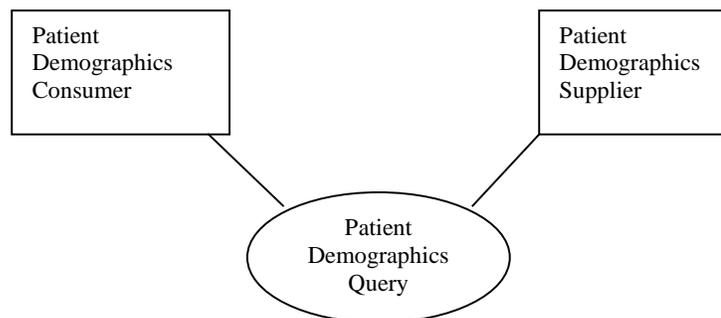

**Actor:** Patient Demographics Consumer

**Role:** Requests a list of patients matching a minimal set of demographic criteria (e.g., ID or partial name) from the Patient Demographics Supplier. Populates its attributes with demographic information received from the Patient Demographics Supplier.


**Actor:** Patient Demographics Supplier

**Role:** Returns demographic information for all patients matching the demographic criteria provided by the Patient Demographics Consumer.

**3.21.3 Referenced Standards**

4125 **HL7:** Version 2.5, Chapter 2 – Control  
Version 2.5, Chapter 3 – Patient Administration  
Version 2.5, Chapter 5 – Query

### 3.21.4 Interaction Diagram

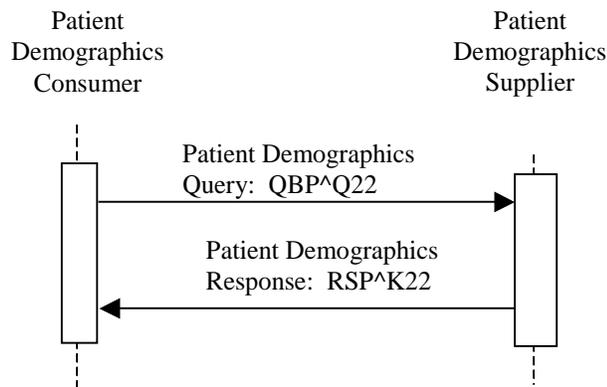

#### 4130 3.21.4.1 Patient Demographics Query

##### 3.21.4.1.1 Trigger Events

A Patient Demographics Consumer’s need to select a patient based on demographic information about patients whose information matches a minimal set of known data will trigger the Patient Demographics Query based on the following HL7 trigger event:

4135 Q22 – Find Candidates

##### 3.21.4.1.2 Message Semantics

4140 The Patient Demographics Query is conducted by the HL7 QBP^Q22 message. The Patient Demographics Consumer Actor shall generate the query message whenever it needs to select from a list of patients whose information matches a minimal set of demographic data. The segments of the message listed below are required, and their detailed descriptions are provided in the following subsections.

**Table 3.21-1: QBP Query by Parameter**

QBP	Query by Parameter	Chapter in HL7 2.5
MSH	Message Header	2
QPD	Query Parameter Definition	5
RCP	Response Control Parameter	5
[DSC]	Continuation Pointer	2

4145 The receiver shall respond to the query by sending the RSP^K22 message. This satisfies the requirements of original mode acknowledgment; no intermediate ACK message is to be sent.

4150 Each Patient Demographics Query request specifies two distinct concepts. The Patient Demographics Query is always targeted at a single source of patient demographic information (referred to in this Transaction as the *patient information source*). A Patient Demographics Supplier may have knowledge of more than one source of demographics. A Patient

Demographics Supplier shall support at least one source of patient demographics and may support multiple sources of demographics. Section 3.21.4.1.2.1 describes how the Patient Demographics Consumer specifies which source of demographics are requested by the query. Each query response shall return demographics from a single patient information source.

- 4155 The second concept present in the query is the set of patient identifier domains referenced by the query. These patient identifier domains may or may not be associated with the patient information source. A Patient Demographics Supplier shall support at least one patient identifier domain and may support multiple identifier domains. Section 3.21.4.1.2.2 describes how the Patient Demographics Consumer requests identifiers from one or more patient identifier domains. Query responses may return patient identifiers from 0, 1 or multiple patient identifier domains.

**3.21.4.1.2.1 MSH Segment**

The MSH segment shall be constructed as defined in the “Message Control” section (ITI TF-2x: C.2.2).

- 4165 The Patient Demographics Supplier is able to obtain demographics from at least one and possibly multiple patient information sources. When more than one patient information source is available, Field *MSH-5-Receiving Application* specifies the patient information source that this query is targeting. The Patient Demographics Supplier shall return this value in *MSH-3-Sending Application* of the RSP^K22 response. The value specified in MSH-5 is not related to the value requested in QPD-8 What Domains Returned.

A list shall be published of all Receiving Applications that the Patient Demographics Supplier supports, for the Patient Demographics Consumer to choose from. Each query is processed against one and only one source of patient demographic information.

- 4175 Field *MSH-9-Message Type* shall have all three components populated with a value. The first component shall have a value of **QBP**; the second component shall have a value of **Q22**. The third component it shall have a value of **QBP\_Q21**.

**3.21.4.1.2.2 QPD Segment**

The Patient Demographics Consumer Actor shall send attributes within the QPD segment as described in Table 3.21-2.

4180

**Table 3.21-2: IHE Profile - QPD segment**

SEQ	LEN	DT	OPT	TBL#	ITEM#	ELEMENT NAME
1	250	CE	R	0471	01375	Message Query Name
2	32	ST	R+		00696	Query Tag
3		QIP	R			Demographics Fields
8		CX	O			What Domains Returned

Adapted from the HL7 standard, version 2.5

4185 The Consumer shall specify “IHE PDQ Query” for QPD-1.1 Message Query Name. All other components of Message Query Name shall not be populated.

**3.21.4.1.2.2.1 Populating QPD-3-Demographics Fields**

4190 Field *QPD-3-Demographics Fields* consists of one or more repetitions, each of which contains two components that together contain the name and value of a distinct parameter to the query. Acceptable segments are PID and PD1. Requirements stated in Appendix E apply to parameters of the datatype CX. In particular, specifying @PID.3.1 without @PID.3.4 is not allowed.

Note: The Patient Demographics Consumer may need to provide an Assigning Authority if the human operator has not provided one.

The first component of each parameter contains the name of an HL7 element in the form

@<seg>.<field no>.<component no>.<subcomponent no>

4195 The above format is populated according to common HL7 usage for specifying elements used in query parameters, as follows:

<seg> represents a 3-character segment ID from the HL7 Standard.

<field no> is the number of a field within the segment as shown in the SEQ column of the segment attribute table for the segment selected.

4200 <component no>, for fields whose data types contain multiple components, shall contain the cardinal number of the component being valued. For fields whose data types do not contain multiple components, <component no> shall not be valued and its preceding period shall not appear.

4205 <subcomponent no>, for components whose data types contain multiple subcomponents, shall contain the cardinal number of the subcomponent being valued. For components whose data types do not contain multiple subcomponents, <subcomponent no> shall not be valued and its preceding period shall not appear.

4210 The second subcomponent of each parameter contains the value that is to be matched. If it is desired to constrain the quality of a match within the bounds of an algorithm known to the Supplier, the algorithm and constraint values may be specified in Fields QPD-4 through QPD-7.

The Patient Demographics Consumer may specify, and the Patient Demographics Supplier shall support, the fields in Table 3.21-3. If the Pediatric Demographics Option is supported, then additionally, the Patient Demographics Consumer may specify, and the Patient Demographics Supplier shall support, the fields in Table 3.21-4.

4215 The Patient Demographics Supplier shall return demographic records that reflect the best fit to all of the search criteria.

**Table 3.21-3: IHE Profile – QPD-3 fields required to be supported**

FLD	ELEMENT NAME
PID.3	Patient Identifier List
PID.5	Patient Name

FLD	ELEMENT NAME
PID.7	Date/Time of Birth
PID.8	Administrative Sex
PID.11	Patient Address
PID.18	Patient Account Number

4220 **Table 3.21-4: IHE Profile – Additional QPD-3 fields required to be supported if the Pediatric Demographic Option is supported**

FLD	ELEMENT NAME
PID.6	Mother’s Maiden Name
PID.13	Phone Number - Home

An example of parameter expressions in QPD-3:

4225 @PID.5.1.1^SMITH~@PID.8^F

requests all patients whose family name (first subcomponent (data type ST) of the first component (data type FN) of PID-5-Patient Name (data type XPN)) matches the value ‘SMITH’ and whose sex (PID-8-Sex (data type IS)) matches the value ‘female’.

**3.21.4.1.2.2 Populating QPD-8-What Domains Returned**

4230 As is specified in the discussion of the Find Candidates (Q22) Query in Chapter 3 of the HL7 Standard, field QPD-8 restricts the set of domains for which identifiers are returned in PID-3:

1. In a multiple-domain environment, QPD-8 may be used to identify one or more domains of interest to the Patient Demographics Consumer and from which the Consumer wishes to obtain a value for *PID-3-Patient Identifier*. Note that the patient information source designated by MSH-5 may or may not be associated with any of the Patient ID Domains listed in *QPD-8-What Domains Returned*.
2. If QPD-8 is empty, the Patient Demographics Supplier shall return all Patient IDs known by the Patient Demographics Supplier for each patient that matches the search criteria. See Case 1 in Section 3.21.4.2.2.8 for details on how this information is returned.
3. If QPD-8 is specified and the domains are recognized, the Patient Demographics Supplier shall return the Patient IDs for each patient that matches the search criteria. See Case 2 in Section 3.21.4.2.2.8 for details on how this information is returned.
4. Any domain not recognized by the Patient Demographics Supplier is an error condition. See Case 3 in Section 3.21.4.2.2.8 how to handle this condition.
5. In a single-domain environment, QPD-8 may be ignored by the Patient Demographics Supplier. The Supplier shall always return the identifier from the Patient ID Domain known by the Patient Demographics Supplier.

Within field QPD-8, only component 4 (Assigning Authority) shall be valued.

4250 The Patient Demographics Supplier may or may not be able to supply additional identifiers from the domains specified in QPD-8. A discussion of how QPD-8 is processed is included in the architectural discussion in the “Using Patient Data Query (PDQ) in a Multi-Domain Environment” section (ITI TF-2x: Appendix M).

The Patient Demographics Consumer shall be able to support at least one of the following mechanisms for specifying QPD-8:

- 4255
1. Transmit an empty value and receive all identifiers in all domains known by the Patient Demographics Supplier (one or more domains), or
  2. Transmit a single value and receive zero or more identifiers in a single domain, or
  3. Transmit multiple values and receive multiple identifiers in those multiple domains.

### 3.21.4.1.2.3 RCP Segment

4260 The Patient Demographics Consumer Actor shall send attributes within the RCP segment as described in Table 3.21-5. Fields not listed are optional and may be ignored.

**Table 3.21-5: IHE Profile - RCP segment**

SEQ	LEN	DT	OPT	TBL#	ITEM#	ELEMENT NAME
1	1	ID	R	0091	00027	Query Priority
2	10	CQ	O	0126	00031	Quantity Limited Request

Adapted from the HL7 standard, version 2.5

4265

#### 3.21.4.1.2.3.1 Populating RCP-1-Query Priority

Field *RCP-1-Query Priority* shall always contain **I**, signifying that the response to the query is to be returned in Immediate mode.

#### 3.21.4.1.2.3.2 Populating RCP-2-Quantity Limited Request

4270 The Patient Demographics Consumer Actor may request that responses to the query be sent, using the HL7 Continuation Protocol, in increments of a specified number of patient records. (In the context of the HL7 query, a patient record is defined as the PID segment and any segments accompanying it for each patient.) It is desirable to request an incremental response if the query could result in hundreds or thousands of matches or “hits.”

4275 The Patient Demographics Supplier Actor shall support the HL7 Continuation Protocol.

Field RCP-2 is of data type CQ, which contains two components. The first component contains the number of increments, always expressed as an integer greater than 0, while the second component contains the kind of increment, always **RD** to signify that incremental replies are specified in terms of records.

4280 For example, **50^RD** requests 50 records at a time.

See the “Incremental Response Processing” (Section 3.21.4.1.3.3) and the “Expected Actions” section of the Patient Demographics Query Response message (Section 3.21.4.2.3) for more information on the implementation of the continuation protocol.

**3.21.4.1.2.4 DSC Segment**

4285 The Patient Demographics Consumer Actor may request additional increments of data by specifying this segment on the query request. This segment should be omitted on the initial query request. Its purpose is to request additional increments of the data from the Patient Demographic Supplier Actor.

4290

**Table 3.21-9: IHE Profile - DSC segment**

SEQ	LEN	DT	OPT	TBL#	ITEM #	ELEMENT NAME
1	180	ST	O		00014	Continuation Pointer
2	1	ID	O	0398	01354	Continuation Style

**3.21.4.1.2.4.1 Populating DSC-1 Continuation Pointer**

To request additional increments of data, DSC-1 (Continuation Pointer) shall echo the value from RSP^K22 DSC-1.

4295

**3.21.4.1.2.4.2 Populating DSC-2 Continuation Style**

DSC-2 (Continuation Style) shall always contain I, signifying that this is part of an interactive continuation message.

**3.21.4.1.3 Expected Actions**

**3.21.4.1.3.1 Immediate Acknowledgement**

4300

The Patient Demographics Supplier shall immediately return an RSP^K22 response message as specified below in Section 3.21.4.2, “Patient Demographics Response.” The RSP^K22 response message incorporates original mode application acknowledgment as specified in the “Acknowledgment Modes” section (ITI TF-2x: C.2.3). The Supplier shall use *MSH-3-Sending Application* of the RSP^K22 to return the value it received from the Patient Demographics

4305

Consumer in Field *MSH-5-Receiving Application* of the QBP^Q22 message.

**3.21.4.1.3.2 Query Parameter Processing**

The Patient Demographics Supplier Actor shall be capable of accepting, searching on, and responding with attributes in the QPD segment as specified in Table 3.21-2.

4310

The Patient Demographics Supplier Actor must be capable of receiving all possible representations of an Assigning Authority (patient identifier domain) in QPD.8.4 (What Domain Returned): 1) namespace, 2) universal id (OID) and 3) both namespace and universal id (OID).

4315 Handling of phonetic issues, alternate spellings, upper and lower case, wildcards, accented characters, etc., if deemed appropriate, is to be supported by the Patient Demographics Supplier rather than by the Patient Demographics Consumer. The Supplier shall return at least all exact matches to the query parameters sent by the Consumer; IHE does not further specify matching requirements.

**3.21.4.1.3.3 Incremental Response Processing**

4320 The Patient Demographics Supplier Actor shall be capable of accepting and processing attributes in the RCP segment as listed in Table 3.21-5. In particular, the Patient Demographics Supplier Actor shall respond in immediate mode (as specified by a *RCP-1-Query Priority* value of **I**).

Also, the Patient Demographics Supplier Actor shall be able to interpret *RCP-2-Quantity Limited Request* to return successive responses of partial lists of records according to the HL7 Continuation Protocol, as described in Section 3.21.4.2 below and in the HL7 Standard.

**3.21.4.2 Patient Demographics Response**

4325 **3.21.4.2.1 Trigger Events**

The Patient Demographics Supplier’s response to the Find Candidates message shall be the following message:

K22 – Find Candidates response

**3.21.4.2.2 Message Semantics**

4330 The Patient Demographics Response is conducted by the RSP^K22 message. The Patient Demographics Supplier Actor shall generate this message in direct response to the QBP^Q22 message previously received. This message satisfies the Application Level, Original Mode Acknowledgement for the HL7 QBP^Q22 message.

4335 The segments of the message listed without enclosing square brackets in the table below are required. Detailed descriptions of all segments listed in the table below are provided in the following subsections. Other segments of the message are optional.

**Table 3.21-6: RSP Segment Pattern Response**

RSP	Segment Pattern Response	Chapter in HL7 2.5
MSH	Message Header	2
MSA	Message Acknowledgement	2
[ {ERR} ]	Error	2
QAK	Query Acknowledgement	5
QPD	Query Parameter Definition	5
[ { PID	Patient Identification	3
[ PD1 ]		
[ QRI ] ]	Query Response Instance	5
[ DSC ]	Continuation Pointer	2

**3.21.4.2.2.1 MSH Segment**

4340 The MSH segment shall be constructed as defined in the “Message Control” section (ITI TF-2x: C.2.2).

4345 Field *MSH-3-Sending Application* specifies the patient information source that processed the query. The Patient Demographics Supplier shall use Field *MSH-3-Sending Application* of the RSP^K22 message to return the value it received from the Patient Demographics Consumer in Field *MSH-5-Receiving Application* of the QBP^Q22 message.

Field *MSH-9-Message Type* shall have all three components populated with a value. The first component shall have a value of **RSP**; the second component shall have a value of **K22**. The third component shall have a value of **RSP\_K21**.

**3.21.4.2.2.2 MSA Segment**

4350 The Patient Demographics Supplier Actor is not required to send any attributes within the MSA segment beyond what is specified in the HL7 standard. See the “Acknowledgment Modes” section (ITI TF-2x: C.2.3) for the list of all required and optional fields within the MSA segment.

**3.21.4.2.2.3 QAK Segment**

4355 The Patient Demographics Supplier Actor shall send attributes within the QAK segment as defined in Table 3.21-7. For the details on filling in QAK-2 (Query Response Status) refer to the “Patient Demographics Supplier Actor Query Response Behavior” in Section 3.21.4.2.2.8.

QAK-1 (Query Tag) shall echo the same value of QPD-2 (Query Tag) of the QBP^Q22 message, to allow the Patient Demographics Query Consumer to match the response to the corresponding query request.

4360

**Table 3.21-7: IHE Profile - QAK segment**

SEQ	LEN	DT	OPT	TBL#	ITEM#	ELEMENT NAME
1	32	ST	R		00696	Query Tag
2	2	ID	R+	0208	00708	Query Response Status

Adapted from the HL7 standard, version 2.5

**3.21.4.2.2.4 QPD Segment**

4365 The Patient Demographics Supplier Actor shall echo the QPD Segment value that was sent in the QBP^Q22 message.

**3.21.4.2.2.5 PID Segment**

4370 The Patient Demographics Supplier Actor shall return one PID segment group (i.e., one PID segment plus any segments associated with it in the message syntax shown in Table 3.21-6) for each matching patient record found. The Supplier shall return the attributes within the PID

segment as specified in Table 3.21-8. In addition, the Patient Demographics Supplier Actor shall return all other attributes within the PID segment for which it is able to supply values.

**Table 3.21-8: IHE Profile - PID segment**

SEQ	LEN	DT	OPT	TBL#	ITEM#	ELEMENT NAME
3	250	CX	R		00106	Patient Identifier List
5	250	XPN	R		00108	Patient Name
7	26	TS	R2		00110	Date/Time of Birth
8	1	IS	R2	0001	00111	Administrative Sex
11	250	XAD	R2		00114	Patient Address
18	250	CX	R2		00121	Patient Account Number

4375 Adapted from the HL7 standard, version 2.5

The Patient Demographics Supplier may or may not be able to supply additional identifiers from the domains specified in QPD-8. Inability to supply an identifier in a particular domain is not an error, provided that the domain is recognized.

4380 The PID segment and its associated PD1 and QRI segments are returned only when the Patient Demographics Supplier Actor is able to associate the search information in QPD-3 with one or more patient records in the patient information source associated with *MSH-5-Receiving Application*. See the “Patient Demographics Supplier Actor Query Response Behavior” Section 3.21.4.2.2.8 for a detailed description of how the Patient Demographics Supplier Actor responds to the query request under various circumstances.

4385

**3.21.4.2.2.6 QRI Segment**

For each patient for which the Patient Demographics Supplier Actor returns a PID Segment, it may optionally return the QRI (Query Response Instance) segment, but is not required to do so. Refer to the HL7 Standard, Version 2.5, Chapter 5, Section 5.5.5, for more information.

4390 **3.21.4.2.2.7 DSC Segment**

If the number of records is specified in *RCP-2-Quantity Limited Request*, the Patient Demographics Supplier Actor shall return an incremental response of that number of records when the number of matching records it finds exceeds the number of records specified in *RCP-2*.

4395 As long as the Patient Demographics Supplier Actor has records to return in addition to those returned in the incremental response, the Supplier shall return a DSC Segment. The single field of the DSC Segment shall contain a unique alphanumeric value (the Continuation Pointer) that the Patient Demographics Consumer may return in the DSC of the QBP^Q22 message to request the next increment of responses. The Supplier shall return increments as many times as the Consumer requests them (and there are increments to return), and shall stop when the Consumer sends a cancel query (QCN^J01) message (or when there are no more increments to return).

4400

### 3.21.4.2.2.8 Patient Demographics Supplier Actor Query Response Behavior

4405 The Patient Demographics Supplier shall perform the matching of patient data based on the query parameter values it receives. The information provided by the Patient Demographics Supplier Actor to Patient Demographics Consumer Actors is a list of possible matching patients from the patient information source associated with the value that the Consumer sent in *MSH-5-Receiving Application* of the query message.

If domains are specified in *QPD-8-What Domains Returned* and are recognized by the Patient Demographics Supplier, the response will also, for each patient, contain any Patient ID values found in the specified domains.

4410 The mechanics of the matching algorithms used are internal to the Patient Demographics Supplier Actor and are outside of the scope of this framework.

The Patient Demographics Supplier Actor shall respond to the query request as described by the following 3 cases:

4415 **Case 1:** The Patient Demographics Supplier Actor finds (in the patient information source associated with *MSH-5-Receiving Application*) at least one patient record matching the criteria sent in *QPD-3-Demographics Fields*. No patient identifier domains are requested in *QPD-8-What Domains Returned*.

**AA** (application accept) is returned in MSA-1.

**OK** (data found, no errors) is returned in QAK-2.

4420 One PID segment group (i.e., one PID segment plus any segments associated with it in the message syntax shown in Table 3.21-6) is returned from the patient information source for each patient record found. If the Patient Demographics Supplier Actor returns data for multiple patients, it shall return these data in successive occurrences of the PID segment group.

4425 Within each PID segment, field *PID-3-Patient Identifier List* contains one or more identifiers from the set of Patient ID Domains known by the Patient Demographics Supplier.

If an incremental number of records are specified in *RCP-2-Quantity Limited Request*, and the number of records to be sent exceeds that incremental number, the Supplier returns only the incremental number of records, followed by a DSC segment containing a uniquely valued Continuation Pointer.

4430 The consumer will specify the value of the continuation pointer in the DSC segment on the subsequent query request to request the next increment of responses.

4435 **Case 2:** The Patient Demographics Supplier Actor finds (in the patient information source associated with *MSH-5-Receiving Application*) at least one patient record matching the criteria sent in *QPD-3-Demographics Fields*. One or more patient identifier domains are requested in *QPD-8-What Domains Returned*; the Supplier recognizes all the requested domains.

**AA** (application accept) is returned in MSA-1.

**OK** (data found, no errors) is returned in QAK-2.

4440 One PID segment group (i.e., one PID segment plus any segments associated with it in the message syntax shown in Table 3.21-6) is returned for each matching patient record found. If the Patient Demographics Supplier Actor returns data for multiple patients, it shall return these data in successive occurrences of the PID segment group.

4445 Within each PID segment, field *PID-3-Patient Identifier List* contains, in successive occurrences delimited by the repetition separator, the identifiers from all the Patient ID Domains requested in QPD-8. In each occurrence of PID-3, component 4 contains the assigning authority value for one Patient ID Domain, and component 1 contains the Patient ID value in that domain. If an identifier does not exist for a domain that was specified on QPD-8, that identifier is not returned in the list. If all entries in the list of patient identifiers are eliminated, which would leave PID-3 empty, then the corresponding PID segment group shall not be present in the response at all.

4450 If an incremental number of records is specified in *RCP-2-Quantity Limited Request*, and the number of records to be sent exceeds that incremental number, the Supplier returns only the incremental number of records, followed by a DSC segment containing a uniquely valued Continuation Pointer.

The consumer will specify the value of the continuation pointer in the DSC segment on the subsequent query request to request the next increment of responses.

4455 **Case 3:** The Patient Demographics Supplier Actor does not recognize one or more of the domains in *QPD-8-What Domains Returned*.

**AE** (application error) is returned in MSA-1 and in QAK-2.

For each domain that was not recognized, an ERR segment is returned in which the components of *ERR-2-Error Location* are valued as follows.

4460

COMP #	COMPONENT NAME	VALUE
1	Segment ID	QPD
2	Sequence	1
3	Field Position	8
4	Field Repetition	<i>(see below)</i>
5	Component Number	<i>(empty)</i>
6	Subcomponent Number	<i>(empty)</i>

*ERR-2.4-Field Repetition* identifies the ordinal occurrence of QPD-8 that contained the unrecognized domain. As specified by HL7, *ERR-2.5-Component Number* and *ERR-2.6-Subcomponent Number* are not valued because we are referring to the entire field QPD-8.

4465 *ERR-3-HL7 Error Code* is populated with the error condition code 204 (unknown key identifier). Together with the values in ERR-2, this signifies that the Patient Demographics Supplier Actor did not recognize the domain for *QPD-8-What Domains Returned*.

### 3.21.4.2.3 Expected Actions

4470 The Patient Demographics Consumer will use the demographic information provided by the Patient Demographics Supplier to perform the functions for which it requested the information, e.g., providing a pick list to the user.

4475 If the Supplier has sent a DSC segment containing a continuation pointer value, additional increments of data are available upon request by the Consumer. After receiving each increment of data that includes a DSC segment containing a continuation pointer value, the Consumer should take one of the following actions.

- If the Consumer wishes to receive another increment of the data, the Consumer reissues the query message using a new unique value in *MSH-10-message control ID* and adding the DSC segment after the RCP segment. DSC-1 shall echo the continuation pointer returned in RSP^K22 DSC-1 segment.
- 4480 • If the Consumer does not wish to receive another increment of the data, the Consumer issues a cancel query (QCN^J01) message. The consumer shall echo the query tag from QAK-1 in QID-1 and the query message name from QPD-1 in QID-2.
- If the Consumer does not reissue the query or send a cancel query message, the query will eventually terminate.

4485 If the Supplier has not sent a DSC segment containing a continuation pointer value, no more increments of data are available and no further action by the Consumer is required.

### 3.21.4.3 Canceling a query

4490 The Patient Demographic Consumer can send a cancel trigger to notify the Patient Demographic Supplier that no more incremental responses will be requested, and the interactive query can be terminated. This cancellation trigger is optional. How long the Patient Demographic Supplier retains query results (for incremental response) is an implementation decision and therefore beyond the scope of IHE.

#### 3.21.4.3.1 Trigger Events

4495 The Patient Demographic Consumer which received a RSP^K22 response message indicating there are more incremental responses data available, can terminate the interactive query with the following HL7 trigger event:

J01 – Cancel query status

#### 3.21.4.3.2 Message Semantics

4500 Canceling a query is conducted by the QCN^J01 message. The Patient Demographic Consumer can generate this message to notify the Patient Demographic Supplier that no more data is desired. The segments of the message listed below are required, and their details descriptions are provided in the following subsections.

**Table 3.21-10: QCN Cancel query**

QCN	Cancel query	Chapter in HL7 2.5
MSH	Message Header	2
QID	Query identification Segment	5

4505

The receiver shall acknowledge this cancel by the HL7 ACK message. See ITI TF-2x: C.2.3, “Acknowledgement Modes”, for definition and discussion of the ACK message.

**3.21.4.3.2.1 MSH Segment**

4510

The MSH segment shall be constructed as defined in the “Message Control” section (ITI TF-2x: C.2.2).

MSH-9 (Message Type) shall have three components. The first component shall have the value of QCN; the second component shall have a value of J01. The third component shall have the value of QCN\_J01.

**3.21.4.3.2.2 QID Segment**

4515

The QID segment contains the information necessary to uniquely identify the query being cancelled.

**Table 3.21-11: IHE Profile - QID segment**

SEQ	LEN	DT	OPT	TBL#	ITEM#	ELEMENT NAME
1	32	ST	R		00696	Query Tag
2	250	CE	R	0471	01375	Message Query Name

4520

**3.21.4.3.2.2.1 Populating QID-1 Query Tag**

QID-1 (Query Tag) uniquely identifies the query to be canceled. This field shall contain the same value specified in QPD-2.

**3.21.4.3.2.2.2 Populating QID-2 Message Query Name**

4525

QID-2 (Message Query Name) identifies the name of the query. It is an identifier of the conformance statement for this query. This field shall contain the same value specified in QPD-1.

**3.21.5 Security Considerations**

**3.21.5.1 Audit Record Considerations**

4530

The Patient Demographics Query Transaction is a Query Information event as defined in Table 3.20.4.1.1.1-1. The Actors involved shall record audit events according to the following:

### 3.21.5.1.1 Patient Demographics Consumer audit message:

	Field Name	Opt	Value Constraints
<b>Event</b> AuditMessage/ EventIdentification	EventID	M	EV(110112, DCM, "Query")
	EventActionCode	M	"E" (Execute)
	EventDateTime	M	not specialized
	EventOutcomeIndicator	M	not specialized
	EventTypeCode	M	EV("ITI-21", "IHE Transactions", "Patient Demographics Query")
<b>Source (Patient Demographics Consumer) (1)</b>			
<b>Human Requestor (0..n)</b>			
<b>Destination (Patient Demographics Supplier) (1)</b>			
<b>Audit Source (Patient Demographics Consumer) (1)</b>			
<b>Patient (0..n)</b>			
<b>Query Parameters(1)</b>			

Where:

<b>Source</b> AuditMessage/ ActiveParticipant	UserID	M	The identity of the Patient Demographics Consumer Actor facility and sending application from the HL7 message; concatenated together, separated by the   character.
	AlternativeUserID	M	The process ID as used within the local operating system in the local system logs.
	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	M	EV(110153, DCM, "Source")
	NetworkAccessPointTypeCode	M	"1" for machine (DNS) name, "2" for IP address
	NetworkAccessPointID	M	The machine name or IP address.

4535

<b>Human Requestor (if known)</b> AuditMessage/ ActiveParticipant	UserID	M	Identity of the human that initiated the transaction.
	AlternativeUserID	U	not specialized
	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	U	Access Control role(s) the user holds that allows this transaction.
	NetworkAccessPointTypeCode	U	not specialized
	NetworkAccessPointID	U	not specialized

<b>Destination</b> AuditMessage/ ActiveParticipant	UserID	M	The identity of the Patient Demographics Source facility and receiving application from the HL7 message; concatenated together, separated by the   character.
--	--------	---	---

	<i>AlternativeUserID</i>	<i>U</i>	<i>not specialized</i>
	<i>UserName</i>	<i>U</i>	<i>not specialized</i>
	<i>UserIsRequestor</i>	<i>U</i>	<i>not specialized</i>
	<i>RoleIDCode</i>	<i>M</i>	EV(110152, DCM, "Destination")
	<i>NetworkAccessPointTypeCode</i>	<i>M</i>	"1" for machine (DNS) name, "2" for IP address
	<i>NetworkAccessPointID</i>	<i>M</i>	The machine name or IP address.

<b>Audit Source</b> <small>AuditMessage/ AuditSourceIdentification</small>	<i>AuditSourceID</i>	<i>U</i>	<i>Not specialized.</i>
	<i>AuditEnterpriseSiteID</i>	<i>U</i>	<i>not specialized</i>
	<i>AuditSourceTypeCode</i>	<i>U</i>	<i>not specialized</i>

<b>Patient</b> <small>(AuditMessage/ ParticipantObjectIdentification)</small>	<i>ParticipantObjectTypeCode</i>	<i>M</i>	"1" (Person)
	<i>ParticipantObjectTypeCodeRole</i>	<i>M</i>	"1" (Patient)
	<i>ParticipantObjectDataLifeCycle</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectIDTypeCode</i>	<i>M</i>	<i>not specialized</i>
	<i>ParticipantObjectSensitivity</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectID</i>	<i>M</i>	The patient ID in HL7 CX format.
	<i>ParticipantObjectName</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectQuery</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectDetail</i>	<i>U</i>	<i>not specialized</i>

<b>Query Parameters</b> <small>(AuditMessage/ ParticipantObjectIdentification)</small>	<i>ParticipantObjectTypeCode</i>	<i>M</i>	"2" (system object)
	<i>ParticipantObjectTypeCodeRole</i>	<i>M</i>	"24" (query)
	<i>ParticipantObjectDataLifeCycle</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectIDTypeCode</i>	<i>M</i>	EV("ITI-21", "IHE Transactions", "Patient Demographics Query")
	<i>ParticipantObjectSensitivity</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectID</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectName</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectQuery</i>	<i>M</i>	The complete query message (including MSH and QPD segments), base64 encoded.
	<i>ParticipantObjectDetail</i>	<i>M</i>	Type=MSH-10 (the literal string), Value=the value of MSH-10 (from the message content, base64 encoded)

4540

### 3.21.5.1.2 Patient Demographics Source audit message:

	<b>Field Name</b>	<b>Opt</b>	<b>Value Constraints</b>
<b>Event</b>	EventID	M	EV(110112, DCM, "Query")

	EventActionCode	M	“E” (Execute)
	EventDateTime	M	not specialized
	EventOutcomeIndicator	M	not specialized
	EventTypeCode	M	EV(“ITI-21”, “IHE Transactions”, “Patient Demographics Query”)
<b>Source (Patient Demographics Consumer) (1)</b>			
<b>Destination (Patient Demographics Supplier) (1)</b>			
<b>Audit Source (Patient Demographics Supplier) (1)</b>			
<b>Patient (0..n)</b>			
<b>Query Parameters(1)</b>			

Where:

<b>Source</b> (AuditMessage/ ActiveParticipant)	UserID	M	The identity of the Patient Demographics Consumer Actor facility and sending application from the HL7 message; concatenated together, separated by the   character.
	AlternativeUserID	U	not specialized
	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	M	EV(110153, DCM, “Source”)
	NetworkAccessPointTypeCode	M	“1” for machine (DNS) name, “2” for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Destination</b> (AuditMessage/ ActiveParticipant)	UserID	M	The identity of the Patient Demographics Supplier facility and receiving application from the HL7 message; concatenated together, separated by the   character.
	AlternativeUserID	M	The process ID as used within the local operating system in the local system logs.
	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	M	EV(110152, DCM, “Destination”)
	NetworkAccessPointTypeCode	M	“1” for machine (DNS) name, “2” for IP address
	NetworkAccessPointID	M	The machine name or IP address.

4545

<b>Audit Source</b> (AuditMessage/ AuditSourceIdentification)	AuditSourceID	U	not specialized
	AuditEnterpriseSiteID	U	not specialized
	AuditSourceTypeCode	U	not specialized

<b>Patient</b> (AuditMessage/ ParticipantObjectIdentification)	ParticipantObjectTypeCode	M	“1” (Person)
	ParticipantObjectTypeCodeRole	M	“1” (Patient)
	ParticipantObjectDataLifeCycle	U	not specialized
	ParticipantObjectIDTypeCode	M	not specialized
	ParticipantObjectSensitivity	U	not specialized
	ParticipantObjectID	M	The patient ID in HL7 CX format.
	ParticipantObjectName	U	not specialized
ParticipantObjectQuery	U	not specialized	

	<i>ParticipantObjectDetail</i>	<i>U</i>	<i>not specialized</i>
--	--------------------------------	----------	------------------------

<b>Query Parameters</b> <small>(AuditMessage/ ParticipantObjectIdentification)</small>	ParticipantObjectTypeCode	M	"2" (system object)
	ParticipantObjectTypeCodeRole	M	"24" (query)
	<i>ParticipantObjectDataLifeCycle</i>	<i>U</i>	<i>not specialized</i>
	ParticipantObjectIDTypeCode	M	EV("ITI-21", "IHE Transactions", "Patient Demographics Query")
	<i>ParticipantObjectSensitivity</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectID</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectName</i>	<i>U</i>	<i>not specialized</i>
	ParticipantObjectQuery	M	The complete query message (including MSH and QPD segments), base64 encoded.
ParticipantObjectDetail	M	Type=MSH-10 (the literal string), Value=the value of MSH-10 (from the message content, base64 encoded)	


4550 **3.22 Patient Demographics and Visit Query [ITI-22]**

This section corresponds to Transaction ITI-22 of the IHE IT Infrastructure Technical Framework. Transaction ITI-22 is used by the Patient Demographics Consumer and Patient Demographics Supplier Actors.

**3.22.1 Scope**

4555 This transaction involves a request by the Patient Demographics Consumer Actor for information about patients whose demographic and visit data match data provided in the query message. The request is received by the Patient Demographics Supplier Actor. The Patient Demographics Supplier Actor immediately processes the request and returns a response in the form of demographic and visit information for matching patients.

4560 **3.22.2 Use Case Roles**

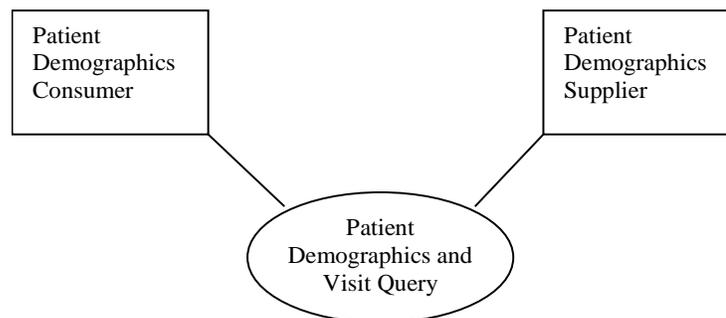

**Actor:** Patient Demographics Consumer

4565 **Role:** Requests a list of patients matching a minimal set of demographic (e.g., ID or partial name) and visit criteria from the Patient Demographics Supplier. Populates its attributes with demographic and visit information received from the Patient Demographics Supplier.

**Actor:** Patient Demographics Supplier

**Role:** Returns demographic and visit information for all patients matching the demographic and visit criteria provided by the Patient Demographics Consumer.

4570 **3.22.3 Referenced Standards**


**HL7:**

Version 2.5, Chapter 2 – Control

Version 2.5, Chapter 3 – Patient Administration

Version 2.5, Chapter 5 – Query

4575 **3.22.4 Interaction Diagram**

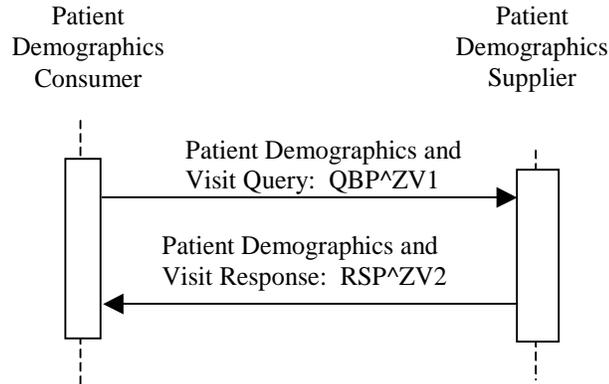

### 3.22.4.1 Patient Demographics and Visit Query

#### 4580 3.22.4.1.1 Trigger Events

A Patient Demographics Consumer’s need to select a patient based on demographic and visit information about patients whose information matches a minimal set of known data will trigger the Patient Demographics and Visit Query based on the following HL7 trigger event:

ZV1 – Find Candidates from Visit Information

#### 4585 3.22.4.1.2 Message Semantics

The Patient Demographics and Visit Query transaction is conducted by the HL7 QBP^ZV1 message. The Patient Demographics Consumer Actor shall generate the query message whenever it needs to select from a list of patients whose information matches a minimal set of demographic and visit data. The segments of the message listed below are required, and their detailed descriptions are provided in the following subsections.

4590

**Table 3.22-1: QBP Query by Parameter**

QBP	Query by Parameter	Chapter in HL7 2.5
MSH	Message Header	2
QPD	Query Parameter Definition	5
RCP	Response Control Parameter	5
[DSC]	Continuation Pointer	2

4595 The receiver shall respond to the query by sending the RSP^ZV2 message. This satisfies the requirements of original mode acknowledgment; no intermediate ACK message is to be sent.

Each Patient Demographics and Visit Query request specifies two distinct concepts. The Patient Demographics and Visit Query is always targeted at a single source of patient demographic information (referred to in this Transaction as the *patient information source*). A Patient Demographics Supplier may have knowledge of more than one source of demographics. A

4600 Patient Demographics Supplier shall support at least one source of patient demographics and may support multiple sources of demographics. Section 3.21.4.1.2.1 describes how the Patient Demographics Consumer specifies which source of demographics are requested by the query. Each query response shall return demographics from a single patient information source.

4605 The second concept present in the query is the set of patient identifier domains referenced by the query. These patient identifier domains may or may not be associated with the patient information source. A Patient Demographics Supplier shall support at least one patient identifier domain and may support multiple identifier domains. Section 3.21.4.1.2.2 describes how the Patient Demographics Consumer requests identifiers from one or more patient identifier domains. Query responses may return patient identifiers from 0, 1 or multiple patient identifier domains.

**3.22.4.1.2.1 MSH Segment**

The MSH segment shall be constructed as defined in the “Message Control” section (ITI TF-2x: C.2.2).

4615 The Patient Demographics Supplier is able to obtain demographics from at least one and possibly multiple patient information sources. When more than one patient information source is available, Field *MSH-5-Receiving Application* specifies the patient information source that this query is targeting. The Patient Demographics Supplier shall return this value in *MSH-3-Sending Application* of the RSP^ZV2 response. The value specified in MSH-5 is not related to the value requested in QPD-8 What Domains Returned.

4620 A list shall be published of all Receiving Applications that the Patient Demographics Supplier supports, for the Patient Demographics Consumer to choose from. Each query is processed against one and only one source of patient demographic information.

4625 Field *MSH-9-Message Type* shall have all three components populated with a value. The first component shall have a value of **QBP**; the second component shall have a value of **ZV1**. The third component shall have a value of **QBP\_Q21**.

**3.22.4.1.2.2 QPD Segment**

The Patient Demographics Consumer Actor shall send attributes within the QPD segment as described in Table 3.22-2.

4630

**Table 3.22-2: IHE Profile - QPD segment**

SEQ	LEN	DT	OPT	TBL#	ITEM#	ELEMENT NAME
1	250	CE	R	0471	01375	Message Query Name
2	32	ST	R+		00696	Query Tag
3		QIP	R			Demographics and Visit Fields
8		CX	O			What Domains Returned

Adapted from the HL7 standard, version 2.5

The Consumer shall specify “IHE PDQ Query” for QPD-1.1 Message Query Name. All other components of Message Query Name shall not be populated.

4635 **3.22.4.1.2.2.1 Parameters in QPD-3-Demographics and Visit-Related Fields**

Field *QPD-3-Demographics and Visit-Related Fields* consists of one or more repetitions, each of which contains two components that together contain the name and value of a distinct parameter to the query. Acceptable segments are PID, PD1, PV1, and PV2.

The first component of each parameter contains the name of an HL7 element in the form

4640 @<seg>.<field no>.<component no>.<subcomponent no>

The above format is populated according to common HL7 usage for specifying elements used in query parameters, as follows:

<seg> represents a 3-character segment ID from the HL7 Standard.

4645 <field no> is the number of a field within the segment as shown in the SEQ column of the segment attribute table for the segment selected.

<component no>, for fields whose data types contain multiple components, shall contain the cardinal number of the component being valued. For fields whose data types do not contain multiple components, <component no> shall not be valued and its preceding period should not appear.

4650 <subcomponent no>, for components whose data types contain multiple subcomponents, shall contain the cardinal number of the subcomponent being valued. For components whose data types do not contain multiple subcomponents, <subcomponent no> shall not be valued and its preceding period shall not appear.

4655 The second subcomponent of each parameter contains the value that is to be matched. If it is desired to constrain the quality of a match within the bounds of an algorithm known to the Supplier, the algorithm and constraint values may be specified in Fields QPD-4 through QPD-7.

4660 The Patient Demographics Consumer may specify, and the Patient Demographics Supplier shall support, the fields in Table 3.22-3. If the Pediatric Demographics Option is supported, then additionally, the Patient Demographics Consumer may specify, and the Patient Demographics Supplier shall support, the fields in Table 3.22-4.

**Table 3.22-3: IHE Profile – QPD-3 fields required to be supported**

FLD	ELEMENT NAME
PID.3	Patient Identifier List
PID.5	Patient Name
PID.7	Date/Time of Birth
PID.8	Administrative Sex
PID.11	Patient Address
PID.18	Patient Account Number

4665

**Table 3.22-4: IHE Profile – QPD-3 fields required to be additionally supported if Pediatric Demographics is supported**

FLD	ELEMENT NAME
PID.6	Mother’s Maiden Name
PID.13	Phone Number - Home

4670

In addition, the Patient Demographics Supplier should support the fields in the following table, and it shall support at least one of them. Some fields may not be relevant to particular care settings (e.g., inpatient, day patient) and will thus not be supportable by domains in those care settings.

**Table 3-22.4: IHE Profile – QPD-3 fields recommended to be supported**

FLD	ELEMENT NAME
PV1.2	Patient Class
PV1.3	Assigned Patient Location
PV1.7	Attending Doctor
PV1.8	Referring Doctor
PV1.9	Consulting Doctor
PV1.10	Hospital Service
PV1.17	Admitting Doctor
PV1.19	Visit Number

4675

The Patient Demographics Supplier shall return demographic records that reflect the best fit to all of the search criteria.

Examples of parameter expressions in QPD-3:

**@PID.5.1.1^SMITH~@PID.8^F**

4680

requests all patients whose family name (first subcomponent (data type ST) of the first component (data type FN) of PID-5-Patient Name (data type XPN)) matches the value ‘SMITH’ and whose sex (PID-8-Sex (data type IS)) matches the value ‘female’.

**@PV1.3.2^389~@PV1.3.3^2**

4685

requests all patients whose room number (second component (data type IS) of PV1-3-Assigned Patient Location (data type PL)) matches the value 389 and whose bed number (third component (data type IS) of PV1-3-Assigned Patient Location (data type PL)) matches the value 2.

**3.22.4.1.2.2.2 Populating QPD-8-What Domains Returned**

As in the Patient Demographics Query [ITI-21] transaction, field QPD-8 restricts the set of domains for which identifiers are returned in PID-3:

- 4690 1. In a multiple-domain environment, QPD-8 may be used to identify one or more domains of interest to the Patient Demographics Consumer and from which the Consumer wishes to obtain a value for *PID-3-Patient Identifier*. Note that the patient information source designated by MSH-5 may or may not be associated with any of the Patient ID Domains listed in *QPD-8-What Domains Returned*.
- 4695 2. If QPD-8 is empty, the Patient Demographics Supplier shall return all Patient IDs known by the Patient Demographics Supplier for each patient that matches the search criteria. See Case 1 in Section 3.21.4.2.2.8 for details on how this information is returned.
- 4700 3. If QPD-8 is specified and the domains are recognized, the Patient Demographics Supplier shall return the Patient IDs for each patient that matches the search criteria. See Case 2 in Section 3.21.4.2.2.8 for details on how this information is returned.
- 4705 4. Any domain not recognized by the Patient Demographics Supplier is an error condition. See Case 3 in Section 3.21.4.2.2.8 how to handle this condition.
- 4705 5. In a single-domain environment, QPD-8 may be ignored by the Patient Demographics Supplier. The Supplier shall always return the identifier from the Patient ID Domain known by the Patient Demographics Supplier.

Within field QPD-8, only component 4 (Assigning Authority) shall be valued.

4710 The Patient Demographics Supplier may or may not be able to supply additional identifiers from the domains specified in QPD-8. A discussion of how QPD-8 is processed is included in the architectural discussion in the “Using Patient Data Query (PDQ) in a Multi-Domain Environment” section (ITI TF-2x: Appendix M).

The Patient Demographics Consumer shall be able to support at least one of the following mechanisms for specifying QPD-8:

- 4715 1. Transmit an empty value and receive all identifiers in all domains known by the Patient Demographics Supplier (one or more domains), or
2. Transmit a single value and receive zero or more identifiers in a single domain, or
3. Transmit multiple values and receive multiple identifiers in those multiple domains.

### 3.22.4.1.2.3 RCP Segment

The Patient Demographics Consumer Actor shall send attributes within the RCP segment as described in Table 3.22-5. Fields not listed are optional.

4720

**Table 3.22-5: IHE Profile - RCP segment**

SEQ	LEN	DT	OPT	TBL#	ITEM#	ELEMENT NAME
1	1	ID	R	0091	00027	Query Priority
2	10	CQ	O	0126	00031	Quantity Limited Request

Adapted from the HL7 standard, version 2.5

**3.22.4.1.2.3.1 Populating RCP-1-Query Priority**

4725 Field *RCP-1-Query Priority* shall always contain **I**, signifying that the response to the query is to be returned in Immediate mode.

**3.22.4.1.2.3.2 Populating RCP-2-Quantity Limited Request**

4730 The Patient Demographics Consumer Actor may request that responses to the query be sent, using the HL7 Continuation Protocol, in increments of a specified number of patient records. (In the context of the HL7 query, a patient record is defined as the PID segment and any segments accompanying it for each patient.) It is desirable to request an incremental response if the query could result in hundreds or thousands of matches or “hits.”

The Patient Demographics Supplier Actor shall support the HL7 Continuation Protocol.

4735 Field RCP-2 is of data type CQ, which contains two components. The first component contains the number of increments, always expressed as an integer greater than 0, while the second component contains the kind of increment, always **RD** to signify that incremental replies are specified in terms of records.

For example, **50^RD** requests 50 records at a time.

4740 See the “Incremental Response Processing” Section 3.22.4.1.3.3 and the “Expected Actions” Section 3.22.4.2.3 of the Patient Demographics Query Response message for more information on the implementation of the continuation protocol.

**3.22.4.1.2.4 DSC Segment**

4745 The Patient Demographics Consumer Actor may request additional increments of data by specifying this segment on the query request. This segment should be omitted on the initial query request. Its purpose is to request additional increments of the data from the Patient Demographic Supplier Actor.

**Table 3.22-9: IHE Profile - DSC segment**

SEQ	LEN	DT	OPT	TBL#	ITEM#	ELEMENT NAME
1	180	ST	O		00014	Continuation Pointer
2	1	ID	O	0398	01354	Continuation Style

**3.22.4.1.2.4.1 Populating DSC-1 Continuation Pointer**

4750 To request additional increments of data, DSC-1 (Continuation Pointer) shall echo the value from **RSP^K22 DSC-1**.

**3.22.4.1.2.4.2 Populating DSC-2 Continuation Style**

DSC-2 (Continuation Style) shall always contain “**T**”, signifying that this is part of an interactive continuation message.

4755 **3.22.4.1.3 Expected Actions**

**3.22.4.1.3.1 Immediate Acknowledgement**

4760 The Patient Demographics Supplier shall immediately return an RSP^ZV2 response message as specified below in Section 3.22.4.2, “Patient Demographics Response.” The RSP^ZV2 response message incorporates original mode application acknowledgment as specified in the “Acknowledgment Modes” section (ITI TF-2x: C.2.3). The Supplier shall use Field *MSH-3-Sending Application* of the RSP^ZV2 message to return the value it received from the Patient Demographics Consumer in Field *MSH-5-Receiving Application* of the QBP^ZV1 message.

**3.22.4.1.3.2 Query Parameter Processing**

4765 The Patient Demographics Supplier Actor shall be capable of accepting, searching on, and responding with attributes in the QPD segment as specified in Table 3.22-2.

The Patient Demographics Supplier Actor must be capable of receiving all valid combinations of subcomponents that make up the Assigning Authority component (i.e., all valid combinations of QPD-3.8).

4770 Handling of phonetic issues, alternate spellings, upper and lower case, wildcards, accented characters, etc., if deemed appropriate, is to be supported by the Patient Demographics Supplier rather than by the Patient Demographics Consumer. The Supplier shall return at least all exact matches to the query parameters sent by the Consumer; IHE does not further specify matching requirements.

**3.22.4.1.3.3 Incremental Response Processing**

4775 The Patient Demographics Supplier Actor shall be capable of accepting and processing attributes in the RCP segment as listed in Table 3.22-5. In particular, the Patient Demographics Supplier Actor shall respond in immediate mode (as specified by a *RCP-1-Query Priority* value of **I**).

4780 Also, the Patient Demographics Supplier Actor shall be able to interpret *RCP-2-Quantity Limited Request* to return successive responses of partial lists of records according to the HL7 Continuation Protocol, as described in Section 3.22.4.2 below and in the HL7 Standard.

**3.22.4.2 Patient Demographics and Visit Response**

**3.22.4.2.1 Trigger Events**

The Patient Demographics Supplier’s response to the Find Candidates with Visit Information message shall be the following message:

4785 ZV2 – Find Candidates with Visit Information response

**3.22.4.2.2 Message Semantics**

4790 The Patient Demographics and Visit Response transaction is conducted by the RSP^ZV2 message. The Patient Demographics Supplier Actor shall generate this message in direct response to the QBP^ZV1 message previously received. This message satisfies the Application Level, Original Mode Acknowledgement for the HL7 QBP^ZV1 message.

The segments of the message listed without enclosing square brackets in Table 3.22-6 are required. Detailed descriptions of all segments listed in the table below are provided in the following subsections. Other segments of the message are optional.

4795

**Table 3.22-6: RSP Segment Pattern Response**

<b>RSP</b>	<b>Segment Pattern Response</b>	<b>Chapter in HL7 2.5</b>
MSH	Message Header	2
MSA	Message Acknowledgement	2
[ {ERR} ]	Error	2
QAK	Query Acknowledgement	5
QPD	Query Parameter Definition	5
[ { PID	Patient Identification	3
[ PD1 ]	Additional Patient Demographics	3
PV1	Patient Visit	3
[ PV2 ]	Patient Visit – Additional Information	3
[ QRI ] ] ]	Query Response Instance	5
[ DSC ]	Continuation Pointer	2

#### **3.22.4.2.2.1 MSH Segment**

The MSH segment shall be constructed as defined in the “Message Control” section (ITI TF-2x: C.2.2).

4800 Field *MSH-3-Sending Application* specifies the patient information source that processed the query. The Patient Demographics Supplier shall use Field *MSH-3-Sending Application* of the RSP^ZV2 message to return the value it received from the Patient Demographics Consumer in Field *MSH-5-Receiving Application* of the QBP^Q22 message.

4805 Field *MSH-9-Message Type* shall have all three components populated with a value. The first component shall have a value of **RSP**; the second component shall have a value of **ZV2**. The third component shall have a value of **RSP\_ZV2**.

#### **3.22.4.2.2.2 MSA Segment**

4810 The Patient Demographics Supplier Actor is not required to send any attributes within the MSA segment beyond what is specified in the HL7 standard. See the “Acknowledgment Modes” section (ITI TF-2x: C.2.3) for the list of all required and optional fields within the MSA segment.

#### **3.22.4.2.2.3 QAK Segment**

The Patient Demographics Supplier Actor shall send attributes within the QAK segment as defined in Table 3.22-7. For the details on filling in QAK-2 (Query Response Status) refer to the “Patient Demographics Supplier Actor Query Response Behavior” Section 3.22.4.2.2.11.

- 4815 QAK-1 (Query Tag) shall echo the same value of QPD-2 (Query Tag) of the QBP^Q22 message, to allow the Patient Demographics Query Consumer to match the response to the corresponding query request.

**Table 3.22-7: IHE Profile - QAK segment**

SEQ	LEN	DT	OPT	TBL#	ITEM#	ELEMENT NAME
1	32	ST	R		00696	Query Tag
2	2	ID	R+	0208	00708	Query Response Status

- 4820 Adapted from the HL7 standard, version 2.5

#### 3.22.4.2.2.4 QPD Segment

The Patient Demographics Supplier Actor shall echo the QPD Segment value that was sent in the QBP^ZV1 message.

#### 3.22.4.2.2.5 PID Segment

- 4825 The Patient Demographics Supplier Actor shall return one PID segment group (i.e., one PID segment plus any segments associated with it in the message syntax shown in Table 3.22-6) for each matching patient record found. The Supplier shall return the attributes within the PID segment as specified in Table 3.22-8. If the Pediatric Demographics Option is supported, then additionally, the Supplier shall return the attributes within the PID segment as specified in Table 3.22-9. In addition, the Patient Demographics Supplier Actor shall return all other attributes within the PID segment for which it is able to supply values.
- 4830

**Table 3.22-8: IHE Profile - PID segment**

SEQ	LEN	DT	OPT	TBL#	ITEM#	ELEMENT NAME
3	250	CX	R		00106	Patient Identifier List
5	250	XPN	R		00108	Patient Name
7	26	TS	R2		00110	Date/Time of Birth
8	1	IS	R2	0001	00111	Administrative Sex
11	250	XAD	R2		00114	Patient Address
18	250	CX	R2		00121	Patient Account Number

- 4835

**Table 3.22-9: IHE Profile, Pediatric Demographics Option - PID segment**

SEQ	LEN	DT	OPT	TBL#	ITEM#	ELEMENT NAME
6	250	XPN	R2		00109	Mother's Maiden Name
13	250	XTN	R2		00116	Phone Number - Home
24	1	ID	R2	0136	00127	Multiple Birth Indicator
25	2	NM	R2		00128	Birth Order (within live births)
33	26	TS	R2		01537	Last Update Date/Time

SEQ	LEN	DT	OPT	TBL#	ITEM#	ELEMENT NAME
34	241	HD	R2		01538	Last Update Facility

Adapted from the HL7 standard, version 2.5

4840 The Patient Demographics Supplier may or may not be able to supply additional identifiers from the domains specified in QPD-8. Inability to supply an identifier in a particular domain is not an error, provided that the domain is recognized.

4845 The PID segment and the PD1, PV1, PV2, and QRI segments that are associated with it are returned only when the Patient Demographics Supplier Actor is able to associate the search information in QPD-3 with one or more patient records in the patient information source associated with *MSH-5-Receiving Application*. See the “Patient Demographics Supplier Actor Query Response Behavior” Section 3.22.4.2.2.11) for a detailed description of how the Patient Demographics Supplier Actor responds to the query request under various circumstances.

#### 3.22.4.2.2.6 PD1 Segment

4850 For each patient for which the Patient Demographics Supplier Actor returns a PID segment, it may optionally return the PD1 (Patient Additional Demographics) segment, but is not required to do so.

#### 3.22.4.2.2.7 PV1 Segment

4855 For each patient for which the Patient Demographics Supplier Actor returns a PID segment, it shall also return a PV1 Segment in which attributes are populated as specified in Table 3.22-9. In addition, the Patient Demographics Supplier Actor shall return all other attributes within the PV1 segment for which it is able to supply values.

**Table 3.22-9: IHE Profile – PV1 segment**

SEQ	LEN	DT	OPT	TBL#	ITEM#	ELEMENT NAME
2	1	IS	R	0004	00132	Patient Class
3	80	PL	R2		00133	Assigned Patient Location
7	250	XCN	R2	0010	00137	Attending Doctor
8	250	XCN	R2	0010	00138	Referring Doctor
9	250	XCN	R2	0010	00139	Consulting Doctor
10	3	IS	R2	0069	00140	Hospital Service
17	250	XCN	R2	0010	00147	Admitting Doctor
19	250	CX	R2		00149	Visit Number

Adapted from the HL7 standard, version 2.5

#### 3.22.4.2.2.8 PV2 Segment

4860 For each patient for which the Patient Demographics Supplier Actor returns a PID segment, it may optionally return the PV2 (Patient Visit – Additional Information) segment, but is not required to do so.

#### 3.22.4.2.2.9 QRI Segment

4865 For each patient for which the Patient Demographics Supplier Actor returns a PID segment, it may optionally return the QRI (Query Response Instance) segment, but is not required to do so. Refer to the HL7 Standard, Version 2.5, Chapter 5, Section 5.5.5, for more information.

#### 3.22.4.2.2.10 DSC Segment

4870 If a number of records is specified in *RCP-2-Quantity Limited Request*, the Patient Demographics Supplier Actor shall return an incremental response of that number of records when the number of matching records it finds exceeds the number of records specified in RCP-2.

4875 As long as the Patient Demographics Supplier Actor has records to return in addition to those returned in the incremental response, the Supplier shall return a DSC Segment. The single field of the DSC Segment shall contain a unique alphanumeric value (the Continuation Pointer) that the Patient Demographics Consumer may return in the DSC segment of the QBP^ZV1 message to request the next increment of responses. The Supplier shall return increments as many times as the Consumer requests them (and there are increments to return), and shall stop when the Consumer sends a cancel query (QCN^J01) message (or when there are no more increments to return). The Supplier shall signal no more increments by omitting the DSC segment.

#### 3.22.4.2.2.11 Patient Demographics Supplier Actor Query Response Behavior

4880 The Patient Demographics Supplier shall perform the matching of patient data based on the query parameter values it receives. The information provided by the Patient Demographics Supplier Actor to Patient Demographics Consumer Actors is a list of possible matching patients from the patient information source associated with the value that the Consumer sent in *MSH-5-Receiving Application* of the query message.

4885 If domains are specified in *QPD-8-What Domains Returned* and are recognized by the Patient Demographics Supplier, the response will also, for each patient, contain any Patient ID values found in the specified domains.

The mechanics of the matching algorithms used are internal to the Patient Demographics Supplier Actor and are outside of the scope of this framework.

4890 The Patient Demographics Supplier Actor shall respond to the query request as described by the following 3 cases:

4895 **Case 1:** The Patient Demographics Supplier Actor finds (in the patient information source associated with *MSH-5-Receiving Application*) at least one patient record matching the criteria sent in *QPD-3-Demographics Fields*. No patient identifier domains are requested in *QPD-8-What Domains Returned*.

**AA** (application accept) is returned in MSA-1.

**OK** (data found, no errors) is returned in QAK-2.

4900 One PID-PV1 segment group (i.e., one PID segment and one PV1 segment, plus any segments associated with them in the message syntax shown in Table 3.22-6) is returned from the patient information source for each patient record found. If the Patient Demographics Supplier Actor returns data for multiple patients, it shall return these data in successive occurrences of the PID-PV1 segment group.

Within each PID segment, field *PID-3-Patient Identifier List* contains one or more identifiers from the set of Patient ID Domains known by the Patient Demographics Supplier.

4905 If an incremental number of records are specified in *RCP-2-Quantity Limited Request*, and the number of records found exceeds that incremental number, the Supplier returns only the incremental number of records, followed by a DSC segment containing a uniquely valued Continuation Pointer.

4910 The consumer will specify the value of the continuation pointer in the DSC segment on the subsequent query request to request the next increment of responses.

**Case 2:** The Patient Demographics Supplier Actor finds (in the patient information source associated with *MSH-5-Receiving Application*) at least one patient record matching the criteria sent in *QPD-3-Demographics Fields*. One or more patient identifier domains are requested in *QPD-8-What Domains Returned*; the Supplier recognizes all the requested domains.

4915 **AA** (application accept) is returned in MSA-1.

**OK** (data found, no errors) is returned in QAK-2.

4920 One PID-PV1 segment group (i.e., one PID and one PV1 segment plus any segments associated with them in the message syntax shown in Table 3.22-6) is returned for each matching patient record found. If the Patient Demographics Supplier Actor returns data for multiple patients, it shall return these data in successive occurrences of the PID segment group.

4925 Within each PID segment, field *PID-3-Patient Identifier List* contains, in successive occurrences delimited by the repetition separator, the identifiers from all the Patient ID Domains requested in QPD-8. In each occurrence of PID-3, component 4 contains the assigning authority value for one Patient ID Domain, and component 1 contains the Patient ID value in that domain. If an identifier does not exist for a domain that was specified on QPD-8, nothing is returned in the list.

If an incremental number of records is specified in *RCP-2-Quantity Limited Request*, and the number of records to be sent exceeds that incremental number, the Supplier returns only the incremental number of records, followed by a DSC segment containing a uniquely valued Continuation Pointer.

4930 The consumer will specify the value of the continuation pointer in the DSC segment on the subsequent query request to request the next increment of responses.

**Case 3:** The Patient Demographics Supplier Actor does not recognize one or more of the domains in *QPD-8-What Domains Returned*.

**AE** (application error) is returned in MSA-1 and in QAK-2.

4935 For each domain that was not recognized, an ERR segment is returned in which the components of *ERR-2-Error Location* are valued as follows.

COMP #	COMPONENT NAME	VALUE
1	Segment ID	QPD
2	Sequence	1
3	Field Position	8
4	Field Repetition	<i>(see below)</i>
5	Component Number	<i>(empty)</i>
6	Subcomponent Number	<i>(empty)</i>

4940 *ERR-2.4-Field Repetition* identifies the ordinal occurrence of QPD-8 that contained the unrecognized domain. As specified by HL7, *ERR-2.5-Component Number* and *ERR-2.6-Subcomponent Number* are not valued because we are referring to the entire field QPD-8.

*ERR-3-HL7 Error Code* is populated with the error condition code **204** (unknown key identifier). Together with the values in ERR-2, this signifies that the Patient Demographics Supplier Actor did not recognize the domain for *QPD-8-What Domains Returned*.

#### 4945 **3.22.4.2.3 Expected Actions**

The Patient Demographics Consumer will use the demographic information provided by the Patient Demographics Supplier to perform the functions for which it requested the information, e.g., providing a pick list to the user.

4950 If the Supplier has sent a DSC segment containing a continuation pointer value, additional increments of data are available upon request by the Consumer. After receiving each increment of data that includes a DSC segment containing a continuation pointer value, the Consumer should take one of the following actions.

- 4955 • If the Consumer wishes to receive another increment of the data, the Consumer reissues the query message using a new unique value in *MSH-10-message control ID* and adding the DSC segment after the RCP segment. DSC-1 shall echo the continuation pointer returned in RSP^K22 DSC-1 segment.
- If the Consumer does not wish to receive another increment of the data, the Consumer issues a cancel query (QCN^J01) message.
- 4960 • If the Consumer does not reissue the query or send a cancel query message, the query will eventually terminate.

If the Supplier has not sent a DSC segment containing a continuation pointer value, no more increments of data are available and no further action by the Consumer is required.

**3.22.4.3 Canceling a query**

4965 The Patient Demographic Consumer can send a cancel trigger to notify the Patient Demographic Supplier that no more incremental response will be requested, and interactive query can be terminated. This cancellation trigger is optional. How long the Patient Demographic Supplier retains query results (for incremental response) is an implementation decision and therefore beyond the scope of IHE.

**3.22.4.3.1 Trigger Events**

4970 The Patient Demographic Consumer which received a RSP^K22 response message indicating there more incremental response data available, can terminate the interactive query with the following HL7 trigger event:

J01 – Cancel query status

**3.22.4.3.2 Message Semantics**

4975 Canceling a query is conducted by the QCN^J01 message. The Patient Demographic Consumer can generate this message to notify the Patient Demographic Supplier that no more data is desired. The segments of the message listed below are required, and their details descriptions are provided in the following subsections.

4980

**Table 3.22-10: QCN Cancel query**

QCN	Cancel query	Chapter in HL7 2.5
MSH	Message Header	2
QID	Query identification Segment	5

The receiver shall acknowledge this cancel by the HL7 ACK message. See ITI TF-2x: C.2.3, “Acknowledgement Modes”, for definition and discussion of the ACK message.

**3.22.4.3.2.1 MSH Segment**

4985 The MSH segment shall be constructed as defined in the “Message Control” section (ITI TF-2x: C.2.2).

MSH-9 (Message Type) shall have three components. The first component shall have the value of QCN; the second component shall have a value of J01. The third component shall have the value of QCN\_J01.

4990 **3.22.4.3.2.2 QID Segment**

The QID segment contains the information necessary to uniquely identify the query being cancelled.

**Table 3.22-11: IHE Profile - QID segment**

SEQ	LEN	DT	OPT	TBL#	ITEM#	ELEMENT NAME
1	32	ST	R		00696	Query Tag
2	250	CE	R	0471	01375	Message Query Name

4995

**3.22.4.3.2.2.1 Populating QID-1 Query Tag**

QID-1 (Query Tag) uniquely identifies the query to be canceled. This field shall contain the same value specified in QPD-2.

**3.22.4.3.2.2.2 Populating QID-2 Message Query Name**

5000 QID-2 (Message Query Name) identifies the name of the query. It is an identifier of the conformance statement for this query. This field shall contain the same value specified in QPD-1.

**3.22.5 Security Considerations**

**3.22.5.1 Audit Record Considerations**

5005 The Patient Demographics Query Transaction is a Query Information event as defined in Table 3.20.4.1.1.1-1. The Actors involved shall record audit events according to the following:

**3.22.5.1.1 Patient Demographics Consumer audit message:**

	Field Name	Opt	Value Constraints
<b>Event</b> AuditMessage/ EventIdentification	EventID	M	EV(110112, DCM, "Query")
	EventActionCode	M	"E" (Execute)
	EventDateTime	M	not specialized
	EventOutcomeIndicator	M	not specialized
	EventTypeCode	M	EV("ITI-22", "IHE Transactions", "Patient Demographics and Visit Query")
<b>Source (Patient Demographics Consumer) (1)</b>			
<b>Human Requestor (0..n)</b>			
<b>Destination (Patient Demographics Supplier) (1)</b>			
<b>Audit Source (Patient Demographics Consumer) (1)</b>			
<b>Patient (0..n)</b>			
<b>Query Parameters(1)</b>			

Where:

	Field Name	Opt	Value Constraints
<b>Source</b> AuditMessage/ ActiveParticipant	UserID	M	The identity of the Patient Demographics Consumer Actor facility and sending application from the HL7 message; concatenated together, separated by the   character.
	AlternativeUserID	M	The process ID as used within the local operating system in the local system logs.
	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	M	EV(110153, DCM, "Source")

	NetworkAccessPointTypeCode	M	“1” for machine (DNS) name, “2” for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Human Requestor (if known)</b> <i>AuditMessage/ActiveParticipant</i>	UserID	M	Identity of the human that initiated the transaction.
	<i>AlternativeUserID</i>	<i>U</i>	<i>not specialized</i>
	<i>UserName</i>	<i>U</i>	<i>not specialized</i>
	<i>UserIsRequestor</i>	<i>U</i>	<i>not specialized</i>
	RoleIDCode	U	Access Control role(s) the user holds that allows this transaction.
	NetworkAccessPointTypeCode	<i>U</i>	<i>not specialized</i>
	NetworkAccessPointID	<i>U</i>	<i>not specialized</i>

5010

<b>Destination</b> <i>AuditMessage/ActiveParticipant</i>	UserID	M	The identity of the Patient Demographics Source facility and receiving application from the HL7 message; concatenated together, separated by the   character.
	<i>AlternativeUserID</i>	<i>U</i>	<i>not specialized</i>
	<i>UserName</i>	<i>U</i>	<i>not specialized</i>
	<i>UserIsRequestor</i>	<i>U</i>	<i>not specialized</i>
	RoleIDCode	M	EV(110152, DCM, “Destination”)
	NetworkAccessPointTypeCode	M	“1” for machine (DNS) name, “2” for IP address
		NetworkAccessPointID	M

<b>Audit Source</b> <i>AuditMessage/AuditSourceIdentification</i>	<i>AuditSourceID</i>	<i>U</i>	<i>not specialized</i>
	<i>AuditEnterpriseSiteID</i>	<i>U</i>	<i>not specialized</i>
	<i>AuditSourceTypeCode</i>	<i>U</i>	<i>not specialized</i>

<b>Patient</b> <i>(AuditMessage/ParticipantObjectIdentification)</i>	ParticipantObjectTypeCode	M	“1” (Person)
	ParticipantObjectTypeCodeRole	M	“1” (Patient)
	<i>ParticipantObjectDataLifeCycle</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectIDTypeCode</i>	<i>M</i>	<i>Not specialized</i>
	<i>ParticipantObjectSensitivity</i>	<i>U</i>	<i>not specialized</i>
	ParticipantObjectID	M	The patient ID in HL7 CX format.
	<i>ParticipantObjectName</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectQuery</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectDetail</i>	<i>U</i>	<i>not specialized</i>

<b>Query Parameters</b> <i>(AuditMessage/ParticipantObjectIdentification)</i>	ParticipantObjectTypeCode	M	“2” (system object)
	ParticipantObjectTypeCodeRole	M	“24” (query)
	<i>ParticipantObjectDataLifeCycle</i>	<i>U</i>	<i>not specialized</i>
	ParticipantObjectIDTypeCode	M	EV(“ITI-22”, “IHE Transactions”, “Patient Demographics and Visit Query”)
	<i>ParticipantObjectSensitivity</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectID</i>	<i>U</i>	<i>not specialized</i>
	<i>ParticipantObjectName</i>	<i>U</i>	<i>not specialized</i>
	ParticipantObjectQuery	M	the QPD segment of the query - Base64 encoded

	ParticipantObjectDetail	M	Type=MSH-10 (the literal string), Value=the value of MSH-10 (from the message content, base64 encoded)
--	-------------------------	---	--

### 3.22.5.1.2 Patient Demographics Source audit message:

5015

	Field Name	Opt	Value Constraints
<b>Event</b> AuditMessage/ EventIdentification	EventID	M	EV(110112, DCM, "Query")
	EventActionCode	M	"E" (Execute)
	EventDateTime	M	not specialized
	EventOutcomeIndicator	M	not specialized
	EventTypeCode	M	EV("ITI-22", "IHE Transactions", "Patient Demographics and Visit Query")
<b>Source (Patient Demographics Consumer) (1)</b>			
<b>Destination (Patient Demographics Supplier) (1)</b>			
<b>Audit Source (Patient Demographics Supplier) (1)</b>			
<b>Patient (0..n)</b>			
<b>Query Parameters(1)</b>			

Where:

<b>Source</b> AuditMessage/ ActiveParticipant	UserID	M	The identity of the Patient Demographics Consumer Actor facility and sending application from the HL7 message; concatenated together, separated by the   character.
	AlternativeUserID	U	not specialized
	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	M	EV(110153, DCM, "Source")
	NetworkAccessPointTypeCode	M	"1" for machine (DNS) name, "2" for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Destination</b> AuditMessage/ ActiveParticipant	UserID	M	The identity of the Patient Demographics Supplier facility and receiving application from the HL7 message; concatenated together, separated by the   character.
	AlternativeUserID	M	The process ID as used within the local operating system in the local system logs.
	UserName	U	not specialized
	UserIsRequestor	U	not specialized
	RoleIDCode	M	EV(110152, DCM, "Destination")
	NetworkAccessPointTypeCode	M	"1" for machine (DNS) name, "2" for IP address
	NetworkAccessPointID	M	The machine name or IP address.

<b>Audit Source</b> AuditMessage/ AuditSourceIdentification	AuditSourceID	U	not specialized
	AuditEnterpriseSiteID	U	not specialized
	AuditSourceTypeCode	U	not specialized

<b>Patient</b>	ParticipantObjectTypeCode	M	"1" (Person)
----------------	---------------------------	---	--------------

	ParticipantObjectTypeCodeRole	M	"1" (Patient)
	ParticipantObjectDataLifeCycle	U	not specialized
	ParticipantObjectIDTypeCode	M	Not specialized
	ParticipantObjectSensitivity	U	not specialized
	ParticipantObjectID	M	The patient ID in HL7 CX format.
	ParticipantObjectName	U	not specialized
	ParticipantObjectQuery	U	not specialized
	ParticipantObjectDetail	U	not specialized

5020

<b>Query Parameters</b> <small>(AuditMessage/ ParticipantObjectIdentification)</small>	ParticipantObjectTypeCode	M	"2" (system object)
	ParticipantObjectTypeCodeRole	M	"24" (query)
	ParticipantObjectDataLifeCycle	U	not specialized
	ParticipantObjectIDTypeCode	M	EV("ITI-22", "IHE Transactions", "Patient Demographics and Visit Query")
	ParticipantObjectSensitivity	U	not specialized
	ParticipantObjectID	U	not specialized
	ParticipantObjectName	U	not specialized
	ParticipantObjectQuery	M	the QPD segment of the query - Base64 encoded
ParticipantObjectDetail	M	Type=MSH-10 (the literal string), Value=the value of MSH-10 (from the message content, base64 encoded)	

### 3.23 Find Personnel White Pages [ITI-23]


This section corresponds to Transaction ITI-23 of the IHE IT Infrastructure Technical Framework. Transaction ITI-23 is used by the Personnel White Pages Consumer and the DNS Server Actors.

5025

#### 3.23.1 Scope

This Transaction is used to locate the Personnel White Pages directory.

#### 3.23.2 Use Case Roles

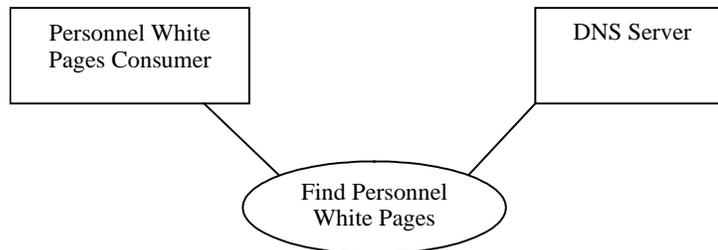

5030 **Actor:** Personnel White Pages Consumer

**Role:** Requests Locating information for the Personnel White Pages Directory

**Actor:** DNS Server


**Role:** Provides locating information about the Personnel White Pages Directory

### 3.23.3 Referenced Standard

- 5035 **IETF:** RFC 2181 Clarifications to the DNS Specification  
 RFC 2219 Use of DNS Aliases for Network Services  
 RFC 2782 A DNS RR for specifying the location of services (DNS SRV)
- DICOM:** DICOM Supplement 67 – Configuration Management

5040 Note: Normative RFC's are frequently updated by issuance of subsequent RFC's. The original older RFC is not modified to include references to the newer RFC. This transaction lists the applicable RFC's in effect at the time of publication. Subsequent updates and clarifications to these RFC's should also be applied.

### 3.23.4 Interaction Diagram

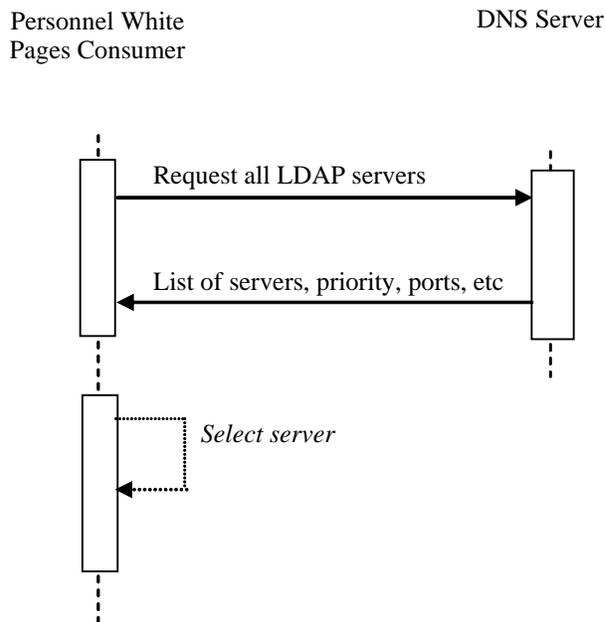

5045

#### 3.23.4.1 Request all LDAP servers

5050 The RFC 2782 DNS RR is used for specifying the location of services (DNS SRV). It specifies a mechanism for requesting the names and rudimentary descriptions for machines that provide network services. The DNS client requests the descriptions for all machines that are registered as offering a particular service name. In this case the service name requested will be “\_ldap.\_tcp”. The DNS server may respond with multiple names for a single request.

##### 3.23.4.1.1 Trigger Events

This transaction is used by the Personnel White Pages Consumer prior to any access to the Personnel White Pages Directory.

5055 **3.23.4.1.2 Message Semantics**

The Personnel White Pages Consumer shall request a list of all the LDAP servers available. The Personnel White Pages Consumer shall use the priority, capacity, and location information provided by DNS as part of the server selection process. (RFC 2782 recommends the proper use of these parameters).

5060 Note:

Multiple LDAP servers providing access to a common replicated LDAP database is a commonly supported configuration. This permits LDAP servers to be located where appropriate for best performance and fault tolerance. The DNS server response information provides guidance for selecting the most appropriate server.

5065 There may also be multiple LDAP servers providing different databases. In this situation the client may have to examine several servers to find the one that supports the Personnel White Pages Directory (See Section 3.24.4.1.2.2).

The client may have a mechanism for manual default selection of the LDAP server to be used if the DNS server does not provide an LDAP server location.

**3.23.4.1.3 Expected Actions**

The DNS Server shall return all known LDAP servers in accordance with RFC 2782.

5070 **3.24 Query Personnel White Pages [ITI-24]**


This section corresponds to Transaction ITI-24 of the IHE IT Infrastructure Technical Framework. Transaction ITI-24 is used by the Personnel White Pages Consumer and the Personnel White Pages Directory Actors.

**3.24.1 Scope**

5075 This Transaction is used to retrieve information from the Personnel White Pages directory.

The RFC 3377 “Lightweight Directory Access Protocol (v3) : Technical Specification” specifies a mechanism for making queries of a database corresponding to an LDAP schema. The LDAP client can compose requests in the LDAP query language, and the LDAP server will respond with the results for a single request.

5080 **3.24.2 Use Case Roles**

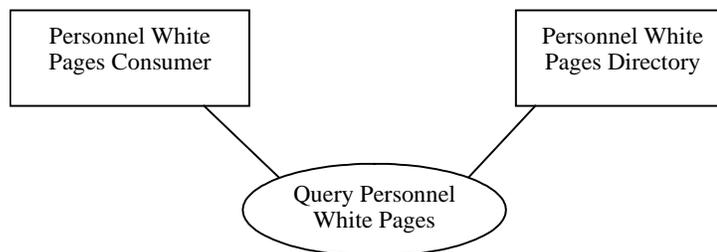

**Actor:** Personnel White Pages Consumer

**Role:** Requests information about a human workforce member(s)


**Actor:** Personnel White Pages Directory

5085 **Role:** Provides information about one or more human workforce member

### 3.24.3 Referenced Standard

	<b>IETF:</b>	RFC 2181 - Clarifications to the DNS Specification
		RFC 1766 - Tags for the Identification of Languages
		RFC 2251 - Lightweight Directory Access Protocol (v3)
5090		RFC 2252 - Lightweight Directory Access Protocol (v3): Attribute Syntax Definitions
		RFC 2253 - Lightweight Directory Access Protocol (v3): UTF-8 String Representation of Distinguished Names
		RFC 2256 - A Summary of the X.500(96) User Schema for use with LDAPv3
5095		RFC 2798 - Definition of the inetOrgPerson LDAP Object Class
		RFC 2829 - Authentication Methods for LDAP
		RFC 2830 - LDAPv3: Extension for Transport Layer Security
		RFC 3377 - Lightweight Directory Access Protocol (v3): Technical Specification
	<b>ISO:</b>	ISO/TS 17090 directory standard for healthcare identity management
5100	<b>CRU:</b>	Projet de schémas d'annuaires et de schémas de registres de ressources numériques interopérables pour les administrations Document technique – v1, novembre 2002
	<b>ITU-T:</b>	E.123: Notation for national and international telephone numbers
	<b>HL7:</b>	HL7 Version 2.5, Chapter 2 – Control

### 3.24.4 Interaction Diagram

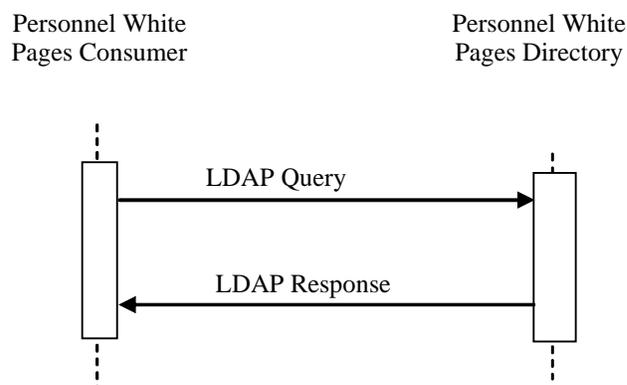

5105

### 3.24.5 LDAP Query/Response

The Personnel White Pages Consumer may make a wide variety of queries and cascaded queries using LDAP. The Personnel White Pages Consumer and Personnel White Pages Directory shall support the data model described here.

- 5110 A commonly supported configuration type has multiple LDAP servers providing access to a common replicated LDAP database. This permits LDAP servers to be located where appropriate for best performance and fault tolerance. The replication rules chosen for the LDAP servers affect the visible data consistency. LDAP permits inconsistent views of the database during updates and replications. This inconsistency may result in a consumer receiving the person's
- 5115 previous demographics or contact information. This should not be a problem for our use-cases as none of them are life critical.

### **3.24.5.1 Trigger Events**

Personnel White Pages Consumer requires some Personnel White Pages information on one or more human workforce members.

### **5120 3.24.5.2 Message Semantics**

The transaction uses standard LDAP v3 query/response mechanisms.

#### **3.24.5.2.1 User Authentication**

- 5125 Some of the attributes to be retrieved using this transaction may be considered sensitive to the healthcare personnel. It is the responsibility of the Personnel White Pages Directory to enforce these protections. To protect records and/or attributes, the Personnel White Pages Consumer may be called upon to provide user credentials.

Anonymous authentication shall be implemented on Personnel White Pages Directory and is optional for Personnel White Pages Consumer. Anonymous authentication shall be implemented as described in LDAP v3 Section 4.2 Bind Operation.

- 5130 Simple Authentication shall be implemented on the Personnel White Pages Directory and is optional for the Personnel White Pages Consumer. Simple authentication shall be implemented as described in LDAP v3 Section 4.2 Bind Operation. This authentication type is not recommended for use over networks that are not otherwise secured as the username and password are transferred in the clear. The use of SSL-Simple Authentication is a better choice.

- 5135 SSL-Simple Authentication shall be implemented on the Personnel White Pages Directory and is optional for the Personnel White Pages Consumer. SSL-Simple Authentication is not defined in any normative text, but is consistently implemented and often referred to as "ldaps". The PWP Consumer shall connect to port 636 using SSL against the PWP Directory Certificate. The LDAP
- 5140 v3 conversation then continues with Simple Authentication as defined in LDAP v3 Section 4.2 Bind Operation.

PWP specifies read operations on personnel demographics. The use of bi-directional TLS authentication, such as that defined in ATNA Profile, is not necessary as this profile does not provide access to Protected Health Information (PHI). The use of SSL to cover the authentication and query process is sufficient in this Profile.

#### **5145 3.24.5.2.2 Base DN Discovery**

The Personnel White Pages represents a branch within the "LDAP" directory. Branches in LDAP are defined by a "Base DN". The list of Base DNs that are provided by a LDAP directory can be

5150 found by doing a LDAP Query with a NULL (i.e., "") Base DN, and ObjectClass="DN". The  
Personnel White Pages Directory shall contain a person object with the cn="IHE-ITI-PWP". The  
Personnel White Pages Consumer may thus search through the list of Base DN's that the LDAP  
5155 Directory contains for this cn object. The Personnel White Pages Directory identified in this way  
shall contain person/inetOrgPerson objects that conform to the Query Personnel White Pages  
Directory Transaction.

Note: The first LDAP server that yields a result on the search for IHE-ITI-PWP can be used.  
5155 There is no need to search further.

### 3.24.5.2.3 Query Encoding

Note that the LDAP transactions utilize UTF-8 encoding unless otherwise noted. The schema  
shown here is the commonly used schema found in X.500 Schema for LDAP and inetOrgPerson.  
Extensions beyond this schema are not recommended. The base schema must be preserved to  
5160 ensure interoperability. Schema extensions shall not introduce attributes that duplicate the  
meaning of any attribute specified in this Profile.

These attributes are multi-valued unless explicitly defined as single-valued. At this time there is  
no universally implemented method to distinguish the purpose for any of the instances in a multi-  
valued attribute. The IHE recommends that the first entry contain the preferred value, and that  
5165 applications use the first entry whenever a single value must be selected.

The following table shows the attributes found in Person (OrganizationalPerson and  
ResidentialPerson) as defined in RFC 2256 and inetOrgPerson as defined in RFC 2798. The first  
three columns contain the definitions from the standards for reference. Within the table the  
fourth column is the IHE recommendation for use with further discussion found in the fifth  
5170 column.

KEY for IHE REQ Column:

**R** – The Personnel White Pages Directory shall contain valid values for these attributes. These  
values are critical to Healthcare workflow.

5175 **R2**– The Personnel White Pages Directory shall contain valid values for these attributes if the  
value is available. These attributes are sufficiently useful that the provider should utilize it in the  
defined way. Personnel White Pages Consumers should expect that the information in these  
attributes are valid, but shall be robust to empty values.

**O** – The Personnel White Paged Directory may contain values for these optional attributes. The  
IHE has identified sufficiently useful purpose or defined an interoperable way to use the value.  
5180 The IHE may profile these values in future profiles.

**D** – Although these attributes are defined in inetOrgPerson/Person, their use is discouraged. This  
is typically due to the attribute being obsolete, poorly implemented, or not available for query.

**Table 3.24.5-1: Attributes found in Person (OrganizationalPerson and ResidentialPerson)**

Attribute Name	Source	<ul style="list-style-type: none"> <li>• Definition</li> <li>• Standard defined</li> <li>• Optionality</li> <li>• Description</li> </ul>	IHE REQ	IHE Comment
aliasedObjectName	RFC 2256	<ul style="list-style-type: none"> <li>• Alias Object Name</li> <li>• Optional</li> <li>• The aliasedObjectName attribute is used by the directory service if the entry containing this attribute is an alias.</li> </ul>	O	
Audio	RFC 2798	<ul style="list-style-type: none"> <li>• Audio</li> <li>• Optional</li> <li>• Not well defined</li> </ul>	D	The audio format defined is obsolete.
businessCategory	RFC 2798	<ul style="list-style-type: none"> <li>• Business Category</li> <li>• Optional</li> <li>• describes the kind of business performed by an organization</li> </ul>	D	Not well defined
CarLicense	RFC 2798	<ul style="list-style-type: none"> <li>• Vehicle license or registration plate</li> <li>• Optional</li> <li>• Used to record the values of the license or registration plate associated with an individual</li> <li>• (e.g., 6ABC246)</li> </ul>	O	
Cn	RFC 2256	<ul style="list-style-type: none"> <li>• Common Name</li> <li>• Required</li> <li>• This is the X.500 commonName attribute, which contains a name of an object. If the user is a person, it is typically the person's full name.</li> <li>• (e.g., Barbara Jensen)</li> </ul>	R	See Section 3.24.5.2.3.1 Use of language tag and HL7 Name Data Type (XPN)
departmentNumber	RFC 2798	<ul style="list-style-type: none"> <li>• Department Number</li> <li>• Optional</li> <li>• Identifies a department within an organization. This can be numeric or alphanumeric</li> <li>• (e.g., Radiology)</li> </ul>	O	
Description	RFC 2798	<ul style="list-style-type: none"> <li>• Description</li> <li>• Optional</li> <li>• This attribute contains a human-readable description of the object.</li> </ul>	D	
destinationIndicator	RFC 2256	<ul style="list-style-type: none"> <li>• Destination Indicator</li> <li>• Optional</li> <li>• This attribute is used for the telegram service</li> </ul>	D	Originally defined as part of telegram addressing.

Attribute Name	Source	<ul style="list-style-type: none"> <li>• Definition</li> <li>• Standard defined</li> <li>• Optionality</li> <li>• Description</li> </ul>	IHE REQ	IHE Comment
displayName	RFC 2798	<ul style="list-style-type: none"> <li>• Display Name</li> <li>• Optional</li> <li>• Singular</li> <li>• When displaying a person's name, especially within a one-line summary list, it is useful to be able to identify a name to be used. Since other attribute types such as 'cn' are multivalued, an additional attribute type is needed. Display name is defined for this purpose.</li> <li>• (e.g., Babs Jensen)</li> </ul>	R	
employeeNumber	RFC 2798	<ul style="list-style-type: none"> <li>• Employee Number</li> <li>• Optional</li> <li>• Singular</li> <li>• Numeric or alphanumeric identifier assigned to a person, typically based on order of hire or association with an organization.</li> <li>• (e.g., 42)</li> </ul>	O	
employeeType	RFC 2798	<ul style="list-style-type: none"> <li>• Employee Type</li> <li>• Optional</li> <li>• Used to identify the employer to employee relationship. Typical values used will be "Contractor", "Employee", "Intern", "Temp", "External", and "Unknown" but any value may be used.</li> <li>• (e.g., External)</li> </ul>	O	
facsimileTelephoneNumber	RFC 2256	<ul style="list-style-type: none"> <li>• FAX Number</li> <li>• Optional</li> <li>• A value of this attribute is a telephone number for a facsimile terminal (and, optionally, its parameters).</li> <li>• (e.g., +1 408 555 1992)</li> </ul>	R2	See Section 3.24.5.2.3.3 Phone Numbers
GivenName	RFC 2798	<ul style="list-style-type: none"> <li>• Name</li> <li>• Optional</li> <li>• The givenName attribute is used to hold the part of a person's name which is not their surname nor middle name.</li> <li>• (e.g., Barbara)</li> </ul>	R2	
homePhone	RFC 2798	<ul style="list-style-type: none"> <li>• Home Phone</li> <li>• Optional</li> <li>• (e.g., +1 408 555 1862)</li> </ul>	O	

Attribute Name	Source	<ul style="list-style-type: none"> <li>• Definition</li> <li>• Standard defined</li> <li>• Optionality</li> <li>• Description</li> </ul>	IHE REQ	IHE Comment
homePostalAddress	RFC 2798	<ul style="list-style-type: none"> <li>• Home Postal Address</li> <li>• Optional</li> <li>• This attribute contains a home address used by a Postal Service to perform services for the object.</li> </ul>	O	
Initials	RFC 2798	<ul style="list-style-type: none"> <li>• Initials</li> <li>• Optional</li> <li>• The initials attribute contains the initials of some or all of an individual's names, but not the surname(s).</li> <li>• (e.g., BJJ)</li> </ul>	R2	
internationaliSDNNumber	RFC 2798	<ul style="list-style-type: none"> <li>• International ISDN Number</li> <li>• Optional</li> </ul>	D	
jpegPhoto	RFC 2798	<ul style="list-style-type: none"> <li>• JPEG Photograph</li> <li>• Optional</li> <li>• Used to store one or more images of a person using the JPEG File Interchange Format</li> </ul>	O	
L	RFC 2256	<ul style="list-style-type: none"> <li>• Locality Name</li> <li>• Optional</li> <li>• This is the X.500 localityName attribute, which contains the name of a locality, such as a city, county or other geographic region.</li> </ul>	O	
labeledURI	RFC 2798	<ul style="list-style-type: none"> <li>• URI</li> <li>• Optional</li> <li>• (e.g., <a href="http://www.ihe.net">http://www.ihe.net</a> IHE Home)</li> </ul>	O	
Mail	RFC 2798	<ul style="list-style-type: none"> <li>• E-Mail Address</li> <li>• Optional</li> <li>• User's e-mail address in RFC 822 compliant form</li> <li>• (e.g., <a href="mailto:bjensen@siroe.com">bjensen@siroe.com</a>)</li> </ul>	R2	
manager	RFC 2798	<ul style="list-style-type: none"> <li>• Manager</li> <li>• Optional</li> <li>• Distinguished Name of the Manager</li> </ul>	O	In Healthcare the manager of an individual is not clear. The manager attribute does not include enough information to determine the type of manager indicated.

Attribute Name	Source	<ul style="list-style-type: none"> <li>• Definition</li> <li>• Standard defined</li> <li>• Optionality</li> <li>• Description</li> </ul>	IHE REQ	IHE Comment
Mobile	RFC 2798	<ul style="list-style-type: none"> <li>• Mobile/cellular phone number</li> <li>• Optional</li> <li>• A value of this attribute is a telephone number complying with ITU Recommendation E.123.</li> <li>• (e.g., +1 408 555 1941)</li> </ul>	R2	<p>This attribute should contain only business use mobile phone numbers.</p> <p>See Section 3.24.5.2.3.3 Phone Numbers</p>
O	RFC 2798	<ul style="list-style-type: none"> <li>• Organization</li> <li>• Optional</li> <li>• Highest-level organization name, e.g., a company name, to which ou attribute entries belong.</li> <li>• (e.g., Saint-ihe-hospital.local)</li> </ul>	R2	
objectClass	RFC 2256	<ul style="list-style-type: none"> <li>• Object Class</li> <li>• Required</li> <li>• The values of the objectClass attribute describe the kind of object which an entry represents. The objectClass attribute is present in every entry, with at least two values. One of the values is either "top" or "alias".</li> <li>• (e.g., top, person, organizationalPerson, inetOrgPerson)</li> </ul>	R	
ou	RFC 2256	<ul style="list-style-type: none"> <li>• Organizational Unit Name</li> <li>• Optional</li> <li>• This is the X.500 organizationalUnitName attribute, which contains the name of an organizational unit.</li> <li>• (e.g., Radiologists)</li> </ul>	R2	
pager	RFC 2798	<ul style="list-style-type: none"> <li>• Pager phone number</li> <li>• Optional</li> <li>• A value of this attribute is a telephone number complying with ITU Recommendation E.123.</li> </ul>	R2	<p>This attribute should contain only business use mobile phone numbers.</p> <p>See Section 3.24.5.2.3.3 Phone Numbers</p>
photo	RFC 2798	<ul style="list-style-type: none"> <li>• Photo</li> <li>• Optional</li> <li>• Photo attribute values are encoded in G3 fax format with an ASN.1 wrapper.</li> </ul>	D	<p>The format is too cumbersome. See jpegPhoto.</p>

Attribute Name	Source	<ul style="list-style-type: none"> <li>• Definition</li> <li>• Standard defined</li> <li>• Optionality</li> <li>• Description</li> </ul>	IHE REQ	IHE Comment
physicalDeliveryOfficeName	RFC 2256	<ul style="list-style-type: none"> <li>• Post Office Name</li> <li>• Optional</li> <li>• This attribute contains the name that a Postal Service uses to identify a post office.</li> </ul>	R2	
postalAddress	RFC 2256	<ul style="list-style-type: none"> <li>• Postal Address</li> <li>• Optional</li> <li>• This attribute contains an address used by a Postal Service to perform services for the object.</li> </ul>	R2	
postalCode	RFC 2256	<ul style="list-style-type: none"> <li>• Postal Code</li> <li>• Optional</li> <li>• This attribute contains a code used by a Postal Service to identify a postal service zone, such as a US ZIP code</li> </ul>	R2	
postOfficeBox	RFC 2256	<ul style="list-style-type: none"> <li>• Post Office Box</li> <li>• Optional</li> <li>• This attribute contains the number that a Postal Service uses when a customer arranges to receive mail at a box on premises of the Postal Service.</li> </ul>	R2	
preferredDeliveryMethod	RFC 2798	<ul style="list-style-type: none"> <li>• Delivery Method</li> <li>• Optional</li> <li>• Singular</li> <li>• Coded value (delivery-value) (e.g., any, physical, telephone)</li> </ul>	O	
preferredLanguage	RFC 2798	<ul style="list-style-type: none"> <li>• Preferred Language</li> <li>• Optional</li> <li>• Singular</li> <li>• Preferred written or spoken language for a person. Values for this attribute type MUST conform to the definition of the Accept-Language header field defined in [RFC 2068] with one exception: the sequence "Accept-Language" ":" should be omitted.</li> <li>• The following example indicates that this person prefers French, prefers British English 80%, and general English 70%. (e.g., fr, en-gb;q=0.8, en;q=0.7)</li> </ul>	R2	
registeredAddress	RFC 2256	<ul style="list-style-type: none"> <li>• Registered Address</li> <li>• Optional</li> <li>• A postal address suitable for reception of expedited documents, where it is necessary to have the recipient accept delivery.</li> </ul>	O	

Attribute Name	Source	<ul style="list-style-type: none"> <li>• Definition</li> <li>• Standard defined</li> <li>• Optionality</li> <li>• Description</li> </ul>	IHE REQ	IHE Comment
roomNumber	RFC 2798	<ul style="list-style-type: none"> <li>• Room Number</li> <li>• Optional</li> </ul>	O	
secretary	RFC 2798	<ul style="list-style-type: none"> <li>• Secretary</li> <li>• Optional</li> <li>• Distinguished name of the secretary</li> </ul>	O	
seeAlso	RFC 2798	<ul style="list-style-type: none"> <li>• See Also references</li> <li>• Optional</li> <li>• Distinguished name of other interesting Objects</li> </ul>	D	
sn	RFC 2256	<ul style="list-style-type: none"> <li>• Surname</li> <li>• Required</li> <li>• This is the X.500 surname attribute, which contains the family name of a person (e.g., Jensen)</li> </ul>	R	
st	RFC 2256	<ul style="list-style-type: none"> <li>• State or Province</li> <li>• Optional</li> <li>• This is the X.500 stateOrProvinceName attribute, which contains the full name of a state or province</li> </ul>	R2	
street	RFC 2256	<ul style="list-style-type: none"> <li>• Street Address</li> <li>• Optional</li> <li>• This is the X.500 streetAddress attribute, which contains the physical address of the object to which the entry corresponds, such as an address for package delivery.</li> </ul>	R2	
telephoneNumber	RFC 2256	<ul style="list-style-type: none"> <li>• Telephone number</li> <li>• Optional</li> <li>• A value of this attribute is a telephone number complying with ITU Recommendation E.123.</li> </ul>	R2	See Section 3.24.5.2.3.3 Phone Numbers
teletexTerminalIdentifier	RFC 2798	<ul style="list-style-type: none"> <li>• Teletex Terminal Identifier</li> <li>• Optional</li> </ul>	D	
telexNumber	RFC 2798	<ul style="list-style-type: none"> <li>• Telex Number</li> <li>• Optional</li> </ul>	D	
title	RFC 2256	<ul style="list-style-type: none"> <li>• Title</li> <li>• Optional</li> <li>• This attribute contains the title, such as "Vice President", of a person in their organizational context. The "personalTitle" attribute would be used for a person's title independent of their job function.</li> <li>• (e.g., manager, product development)</li> </ul>	R2	

Attribute Name	Source	<ul style="list-style-type: none"> <li>• Definition</li> <li>• Standard defined</li> <li>• Optionality</li> <li>• Description</li> </ul>	IHE REQ	IHE Comment
uid	RFC 2798	<ul style="list-style-type: none"> <li>• User ID</li> <li>• Optional</li> <li>• The user ID use for system login. (e.g., bjensen)</li> </ul>	O	See Section 3.24.5.2.3.2 Use of uid
userCertificate	RFC 2798	<ul style="list-style-type: none"> <li>• User Identity Certificate</li> <li>• Optional</li> <li>• This attribute is to be stored and requested in the binary form, as 'userCertificate;binary'.</li> </ul>	D	The PKCS12 format includes the private key and shall not be publicly available.
userPassword	RFC 2256	<ul style="list-style-type: none"> <li>• User password</li> <li>• Optional</li> <li>• Passwords are stored using an Octet String syntax and are not encrypted. Transfer of cleartext passwords are strongly discouraged where the underlying transport service cannot guarantee confidentiality and may result in disclosure of the password to unauthorized parties.</li> </ul>	D	Generally Not Accessible
userPKCS12	RFC 2798	<ul style="list-style-type: none"> <li>• User PKCS #12</li> <li>• Optional</li> <li>• PKCS #12 [PKCS12] provides a format for exchange of personal identity information. When such information is stored in a directory service, the userPKCS12 attribute should be used. This attribute is to be stored and requested in binary form, as 'userPKCS12;binary'. The attribute values are PFX PDUs stored as binary data.</li> </ul>	D	The PKCS12 format includes the private key and shall not be publicly available.

Attribute Name	Source	<ul style="list-style-type: none"> <li>Definition</li> <li>Standard defined</li> <li>Optionality</li> <li>Description</li> </ul>	IHE REQ	IHE Comment
userSMIMECertificate	RFC 2798	<ul style="list-style-type: none"> <li>User S/MIME Certificate</li> <li>Optional</li> <li>A PKCS#7 [RFC 2315] SignedData, where the content that is signed is ignored by consumers of userSMIMECertificate values. It is recommended that values have a `contentType` of data with an absent `content` field. Values of this attribute contain a person's entire certificate chain and an smimeCapabilities field [RFC 2633] that at a minimum describes their SMIME algorithm capabilities. Values for this attribute are to be stored and requested in binary form, as 'userSMIMECertificate;binary'. If available, this attribute is preferred over the userCertificate attribute for S/MIME applications.</li> </ul>	O	
x121Address	RFC 2256	<ul style="list-style-type: none"> <li>Address for X.121</li> <li>Optional</li> </ul>	D	
X500uniqueIdentifier	RFC 2798	<ul style="list-style-type: none"> <li>Unique identifier</li> <li>Optional</li> <li>The x500UniqueIdentifier attribute is used to distinguish between objects when a distinguished name has been reused. This is a different attribute type from both the "uid" and "uniqueIdentifier" types.</li> </ul>	O	

### 5185 3.24.5.2.3.1 Use of language tag and HL7 Name Data Type (XCN)

Many people have different variations of their name to be used depending on the context and language. This is easily supported in LDAP through the use of the language tag as documented in RFC 1766. This language tag can be applied to any attribute but is most useful on names.

5190 HL7 has a well-defined format for encoding names (HL7 XCN). LDAP 'name' attributes marked with a language tag of "lang-x-ih" shall be encoded using the HL7 XCN Data Type. UTF-8 shall be used for any characters outside ASCII.

Example use of the language tag:

```

5195   objectclass: Top
        objectclass: person
        objectclass: organizationalPerson
        objectclass: inetOrgPerson
        dn: cn=Wang XiaoDong, ou=Radiologists, o=Saint-ih-hospital.local

```

```

5200      cn: Wang XiaoDong
          cn: XiaoDong, Wang, Florida Department of Health:123456789
          cn/lang-cn: 王 小東
          cn/lang-x-ihe: Wang^XiaoDong^^^^^^A~王^小東^^^^^^
          sn: Wang
          givenname: XiaoDong
5205      givenname/lang-cn: 小東
          sn/lang-cn: 王
          ou: People
          uid: XiaoDong
          title: Sample HL7 person
5210      mail: Wang.XiaoDong@foo.bar.com
          telephonenumber: 555-555-5678

```

### 3.24.5.2.3.2 Use of uid

The uid attribute is a multi-valued attribute that is intended to be used for User ID. It is likely that one of the values for uid will be the enterprise User ID. Enterprises that implement the PWP Profile shall implement the following values for the uid attribute:

- 5215
1. If an enterprise has implemented both IHE ITI EUA and PWP profiles, one of the uid attributes shall contain the IHE ITI EUA user identity in <user>@<realm> format.
  2. If an enterprise has implemented a UPIN, one of the uid attributes shall contain the UPIN value in the format <UPIN>@UPIN. Where a UPIN is the Universal Physician Identification Number as assigned by the assigning authority in which the facility operates (e.g., CMS in the USA).
- 5220

### 3.24.5.2.3.3 Phone Numbers

5225 Phone numbers shall be represented in the PWP Directory using E.123 notation. E.123 is a notation for national and international telephone numbers. Recommendation E.123 defines a standard way to write telephone numbers, e-mail addresses, and web addresses. It recommends the following formats (when dialing the area code is optional for local calling):

Telephone number:

National notation     (042) 123 4567

International notation +31 42 123 4567

5230 E.123 also recommends that a hyphen (-), space ( ), or period (.) be used to visually separate groups of numbers. The parentheses are used to indicate digits that are sometimes not dialed. A slash (/) is used to indicate alternate numbers. This information is important if you want to make sure people know how to dial a phone number in a specific country.

The use of National notation and International notation will be a local PWP Directory policy. PWP Consumers shall expect to receive both notations.

5235 **3.24.5.2.4 Expected Actions**

The Personnel White Pages Directory shall provide the appropriate response to the indicated query given LDAP query rules, local access control policy, and the current information in the directory.

5240 Note: Any attribute is valid to query on, the results of the query may be quick or may take a long time to complete. Each Personnel White Pages Directory will be optimized differently based on architecture and configuration. We expect that the following attributes will be query keys more often than others (cn, displayname, objectclass, sn, uid, givenName, initials, mail, o, ou, and employeeNumber).

Directory shall support Anonymous, Simple, and SSL-Simple Authentications.

5245

**3.25 Intentionally Left Blank**

**3.26 Intentionally Left Blank**

5250 **3.27 Intentionally Left Blank**

**3.28 Intentionally Left Blank**