

Integrating the Healthcare Enterprise



5

**IHE Pharmacy  
Technical Framework Supplement**

10

**Community Prescription  
(PRE)**

15

**Rev. 1.8 – Trial Implementation**

20      Date:                    October 11, 2017  
Author:                        IHE Pharmacy Technical Committee  
Email:                         [pharmacy@ihe.net](mailto:pharmacy@ihe.net)

25

**Please verify you have the most recent version of this document. See [here](#) for Trial Implementation and Final Text versions and [here](#) for Public Comment versions.**

## Foreword

This is a supplement to the forthcoming IHE Pharmacy Technical Framework. Each supplement undergoes a process of public comment and trial implementation before being incorporated into the volumes of the Technical Frameworks.

This supplement is published on October 11, 2017 for trial implementation and may be available for testing at subsequent IHE Connectathons. The supplement may be amended based on the results of testing. Following successful testing it will be incorporated into the forthcoming Pharmacy Technical Framework. Comments are invited and may be submitted at [http://www.ihe.net/Pharmacy\\_Public\\_Comments](http://www.ihe.net/Pharmacy_Public_Comments).

This supplement describes changes to the existing technical framework documents.

“Boxed” instructions like the sample below indicate to the Volume Editor how to integrate the relevant section(s) into the relevant Technical Framework volume.

**40 Amend Section X.X by the following:**

Where the amendment adds text, make the added text **bold underline**. Where the amendment removes text, make the removed text **bold strikethrough**. When entire new sections are added, introduce with editor’s instructions to “add new text” or similar, which for readability are not bolded or underlined.

**45**

General information about IHE can be found at <http://www.ihe.net>.

Information about the IHE Pharmacy domain can be found at [http://www.ihe.net/IHE\\_Domains](http://www.ihe.net/IHE_Domains).

Information about the organization of IHE Technical Frameworks and Supplements and the process used to create them can be found at [http://www.ihe.net/IHE\\_Process](http://www.ihe.net/IHE_Process) and

**50**

<http://www.ihe.net/Profiles>.

The current version of the IHE Pharmacy Technical Framework can be found at [http://www.ihe.net/Technical\\_Frameworks](http://www.ihe.net/Technical_Frameworks).

---

## CONTENTS

55	Introduction.....	5
	Open Issues and Questions .....	5
	Closed Issues.....	5
	<b>Volume 1 – Profiles .....</b>	<b>6</b>
60	1.n Copyright Permissions .....	6
	2.5 Dependencies of the Pharmacy Integration Profiles .....	6
	2.7 History of Annual Changes .....	6
	3 Community Prescription Content Profile.....	8
	3.1 Purpose and Scope .....	8
65	3.2 Process Flow .....	9
	3.2.1 Use Case 1: Placing a prescription.....	9
	3.3 Actors/Transactions.....	9
	3.4 Options.....	10
	3.5 Groupings.....	10
70	3.5.1 Community Medication Prescription and Dispense.....	10
	3.6 Security Considerations .....	10
	3.7 Content Modules .....	11
	3.7.1 Structure of a Community Prescription Document .....	12
	Glossary .....	13
75	<b>Volume 3 – Content Modules.....</b>	<b>16</b>
	5.0 Namespaces and Vocabularies.....	16
	5.1 IHE Format Codes .....	16
	6.0 Pharmacy Content Modules.....	16
	6.3 HL7 Version 3.0 Content Modules .....	16
80	6.3.1 CDA Document Content Modules .....	16
	6.3.1.1 Community Prescription Specification 1.3.6.1.4.1.19376.1.9.1.1.1 .....	16
	6.3.2 CDA Header Content Modules .....	20
	6.3.2.1 Validity of document .....	20
	6.3.3 CDA Section Content Modules .....	21
85	6.3.3.1 Prescription Section Content Module (1.3.6.1.4.1.19376.1.9.1.2.1) .....	21
	6.3.4 CDA Entry Content Modules .....	23
	6.3.4.1 Medicine Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.1) .....	24
	6.3.4.2 Prescription Item Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.2) .....	31
	6.3.4.6 Dosage Instructions Content Module (1.3.6.1.4.1.19376.1.9.1.3.6) .....	43
90	6.3.4.7 Amount of units of the consumable Content Module (1.3.6.1.4.1.19376.1.9.1.3.8) .....	48
	6.3.4.8 Substitution Permission Content Module (1.3.6.1.4.1.19376.1.9.1.3.9.1) .....	49
	6.3.4.9 Reference to Medication Treatment Plan Item Content Module (1.3.6.1.4.1.19376.1.9.1.3.10) .....	51
95	6.3.4.10 Reference to Prescription Item Content Module (1.3.6.1.4.1.19376.1.9.1.3.11) .....	55

---

	6.3.4.11 Reference to Dispense Item Content Module (1.3.6.1.4.1.19376.1.9.1.3.12) ..	59
	6.3.4.12 Reference to Pharmaceutical Advice Item Content Module (1.3.6.1.4.1.19376.1.9.1.3.13) .....	62
100	6.3.4.13 Reference to Medication Administration Item Content Module (1.3.6.1.4.1.19376.1.9.1.3.14) .....	66
	6.3.4.14 Renewal Period Content Module (1.3.6.1.4.1.19376.1.9.1.3.15) .....	70
	6.5 PHARM Value Sets .....	72
	6.5.3 IHE Pharmacy Item Type List .....	72
105	Appendices .....	73
	Appendix A Validating CDA Documents using the Framework .....	74
	A.1 Validating Documents .....	74
	A.2 Validating Sections .....	74
	A.3 Phases of Validation and Types of Errors.....	74
110	Appendix B Extensions to CDA Release 2.....	75
	B.1 IHE PHARM Extensions .....	75
	B.1.1 Used for Medicine Entry Content Module .....	75
	Volume 3 Namespace Additions .....	78

115 **Introduction**

The Community Prescription Document Profile (PRE) describes the content and format of a Community Prescription document generated during the process in which a health care professional (in most cases, but not necessarily always, a medical specialist or a general practitioner) decides that the patient needs medication. A prescription is an entity that can be seen as an order to anyone entitled to dispense (prepare and hand out) medication to the patient.

120 Documents created according to this profile are intended to be used in the context of the “Community Medication Prescription and Dispense” Integration Profile (CMPD). This supplement also references other documents<sup>1</sup>. The reader should have already read and understood these documents:

- 125 1. [PHARM Common parts document](#)
2. [PHARM Community Medication Prescription and Dispense Integration Profile \(CMPD\)](#)
3. [PCC Technical Framework Volume 1](#)
4. [PCC Technical Framework Volume 2](#)
5. [IT Infrastructure Technical Framework Volume 1](#)
- 130 6. [IT Infrastructure Technical Framework Volume 2](#)
7. [IT Infrastructure Technical Framework Volume 3](#)
8. HL7®<sup>2</sup> and other standards documents referenced in this document

**Open Issues and Questions**

- Prescription of non-medication products": shall they be covered by this profile?

135 **Closed Issues**

- Substitution Handling: Evaluation if incorporating parts of the HL7 COCT\_RM360000UV structure to provide a semantically better solution than now. -> The structure has been corrected in accordance with HL7 (see CP-PHARM-005\_v2)
- Prescription Section Content Module: It is still in discussion, if it's allowed to state the CCD®<sup>3</sup> template as “parent”, or if we have to weaken it to “derived from”.
  - The Section Content Module has been decoupled from the CCD parent.

---

<sup>1</sup> The first seven documents can be located on the IHE Website at [http://ihe.net/Resources/Technical\\_Frameworks/](http://ihe.net/Resources/Technical_Frameworks/). The remaining documents can be obtained from their respective publishers.

<sup>2</sup> HL7 is the registered trademark of Health Level Seven International.

<sup>3</sup> CCD is the registered trademark of Health Level Seven International.

# Volume 1 – Profiles

*Add the following to Section 1.n*

## 1.n Copyright Permissions

- 145 Health Level Seven, Inc. has granted permission to the IHE to reproduce tables from the HL7 standard. The HL7 tables in this document are copyrighted by Health Level Seven, Inc. All rights reserved. Material drawn from these documents is credited where used.

*Add the following to Section 2.5*

## 150 2.5 Dependencies of the Pharmacy Integration Profiles

Community Prescription (PRE)	PCC	Content definition	This profile includes Section and Entry Content Modules of the Patient Care Coordination (PCC) domain.
---------------------------------	-----	--------------------	--

*Add the following to Section 2.7*

## 2.7 History of Annual Changes

- 155 In the 2016-2017 cycle of the IHE Pharmacy initiative, the following major changes were introduced to this supplement (please see the list of this year's change proposals for the complete set of changes at [ftp://ftp.ihe.net/Pharmacy/Technical\\_Framework/CP%20Overview](ftp://ftp.ihe.net/Pharmacy/Technical_Framework/CP%20Overview)):

- Profile has been renamed from “Pharmacy Prescription” to “Community Prescription”
- Glossary extended
- New Header Content Module “Validity of document” introduced (validity of prescription)
- 160 • Parent template CCD on section level removed
- Constraint that section id has to be equal to document id has been removed
- Title and text elements have been added on section level
- Medicine Entry Content Module
- Reporting of authors into the entry-level refined
- 165 • References to items of previous process stages (Medication Treatment Plan Items, ...) refined and reorganized at “Reference to ...” Content Modules
- Substitution permission structure refined and reorganized at “Substitution Permission Content Module”

- Renewal Period added
- 170    • Pharm-Namespace “ihe:pharm:medication” changed to “ihe:pharm” (see Medicine Entry Content Module)

**Important note:** Due to the nature of some of the changes, this profile version is no longer downward compatible to the former versions.

175

*Add Section 3*

### **3 Community Prescription Content Profile**

The Community Prescription Document Profile (PRE) describes the content and format of a Community Prescription document generated during the process in which a health care professional (in most cases, but not necessarily always, a medical specialist or a general practitioner) decides that the patient needs medication. A prescription is an entity that can be seen as an order to anyone entitled to dispense (prepare and hand out) medication to the patient.

180 Documents created according to this profile are intended to be used in the context of the “Community Medication Prescription and Dispense” Integration Profile (CMPD).

#### **185 3.1 Purpose and Scope**

The Community Medication Prescription and Dispense workflow starts with the creation of a prescription in case the health care professional decides that the patient needs medication.

A Community Prescription document is issued by one ordering healthcare professional for one patient, in the context of zero or one administrative encounter (between the patient and the ordering physician and/or the healthcare institution). A prescription may contain one or more Prescription Items (lines on a paper prescription). Each line relates to one medication. A prescription is the outcome of a clinical decision.

190 This profile defines the content and format of such a Community Prescription document.

For a detailed overview on the whole Pharmacy domain business processes, please refer to the 195 “Common parts” document, which is accompanying this profile.

## 3.2 Process Flow

### 3.2.1 Use Case 1: Placing a prescription

- 200 During treatment of a patient, physicians or other allowed persons may have to prescribe drugs for the patient. The prescription shall contain one or more positions (Prescription Items) which contain the drug identified by a medication identifier, the dosing as well as other information necessary for correct dispensing and administering by the patient.
- 205 Usually the physician uses the prescribing module in the physician information system for preparing the prescription. After the prescription is completely assembled it shall be submitted to the Community Medication Prescription and Dispense system to be validated and dispensed.
- Refer to the Community Medication Prescription and Dispense Integration Profile (CMPD) for detailed use case information.

## 3.3 Actors/Transactions

- 210 There are two actors in this profile, the Content Creator and the Content Consumer. Content is created by a Content Creator and is to be consumed by a Content Consumer. The sharing or transmission of content from one actor to the other is addressed by the appropriate use of IHE profiles described below, and is out of scope of this profile. A Document Source or a Portable Media Creator may embody the Content Creator. A Document Consumer, a Document Recipient or a Portable Media Importer may embody the Content Consumer. The sharing or transmission 215 of content or updates from one actor to the other is addressed by the use of appropriate IHE profiles described in the section on Content Bindings with XDS, XDM and XDR in PCC TF-2: 4.1.



220

**Figure 3.3-1: Actor Diagram**

225

## 3.4 Options

Options that may be selected for this content profile are listed in Table 3.4-1 along with the actors to which they apply. Dependencies between options when applicable are specified in notes.

**Table 3.4-1: Community Prescription Actors and Options**

Actor	Option	Section
Content Consumer	View Option (See Note 1) Document Import Option (See Note 1) Section Import Option (See Note 1) Discrete Data Import Option (See Note 1)	PCC TF-2: 3.1.1 PCC TF-2: 3.1.2 PCC TF-2: 3.1.3 PCC TF-2: 3.1.4
Content Creator	No options defined	

230

Note 1: The actor shall support at least one of these options.

## 3.5 Groupings

Content profiles may impose additional requirements on the transactions used when grouped with actors from other IHE profiles.

235

### 3.5.1 Community Medication Prescription and Dispense

240

Actors from the Pharmacy CMPD Profile embody the Content Creator and Content Consumer sharing function of this profile. A Content Creator or Content Consumer may be grouped with appropriate actors from the XDS, XDM or XDR Profiles to exchange the content described therein. The metadata sent in the document sharing or interchange messages has specific relationships or dependencies (which we call bindings) to the content of the clinical document described in the content profile.

The Patient Care Coordination Technical Framework defines the bindings to use when grouping the Content Creator of this profile with actors from the Pharmacy CMPD Integration Profiles.

## 3.6 Security Considerations

245

The PRE Integration Profile assumes that a minimum security and privacy environment has been established across all participants. There must exist security policies regarding the use of training, agreements, risk management, business continuity and network security that need to be already in place prior to the implementation of PRE.

250

The IHE ITI ATNA Integration Profile is required of the actors involved in the IHE transactions specified in this profile to protect node-to-node communication and to produce an audit trail of the PHI related actions when they exchange messages.

In addition, the IHE ITI DSG Integration Profiles can be applied to the actors involved in the transactions specified in this profile to securely identify individuals involved in transactions and verify document integrity and authorizations (DSG).

- 255 Interested parties should also read the detailed Security Considerations sections provided for each of the aforementioned profiles in the IHE ITI Technical Framework and its supplements. The PRE Profile does have a few security considerations of its own.
- Pharmacy systems should be thoughtfully designed so that providers are able to review and verify information before it is imported into their Pharmacy system, and that positive user acknowledgements are made before import, and audit trails are recorded when imports occur.
- 260 Imported information should be traceable both to the source Pharmacy system, and the receiver that accepted it into the Pharmacy system. XDS Affinity domain policies should support policies and procedures for tracing information flows between Pharmacy systems.
- Because the information being transferred is in XML, it will be common that different Pharmacy systems utilize different transformations to render the contents into human readable form. A Content Creator should make available the transforms used by the sending provider to review the documents, and a Content Consumer must support rendering the information as seen by the sending provider, allowing both providers to see what was sent in its original rendered form.
- 265

### **3.7 Content Modules**

- 270 Content modules describe the content of a payload found in an IHE transaction. Content profiles are transaction neutral. They do not have dependencies upon the transaction that they appear in. These dependencies are reflected in the Bindings listed above.
- All Community Prescriptions shall be structured and coded as required by the Community Prescription Document Content Module described in this profile. The inclusion of the specific coded attributes explicitly defined as optional, may be supported by specific implementations of Document Sources using an IHE identified coded terminology of their choice. The requirements and manner in which implementations support such capabilities is beyond the scope of this integration profile.
- 275

280

### 3.7.1 Structure of a Community Prescription Document

**Community Prescription CDA Document**  
*Community Prescription Content Module*  
(1.3.6.1.4.1.19376.1.9.1.1.1)

1..1

**Prescription Section**  
*Prescription Section Content Module*  
1.3.6.1.4.1.19376.1.9.1.2.1


1..n

**Prescription Item**  
*Prescription Item Entry Content Module*  
1.3.6.1.4.1.19376.1.9.1.3.2

0..1

**Reference to Medication Treatment Plan Item**  
*Reference to Medication Treatment Plan Item Entry Content Module*  
1.3.6.1.4.1.19376.1.9.1.3.10

:

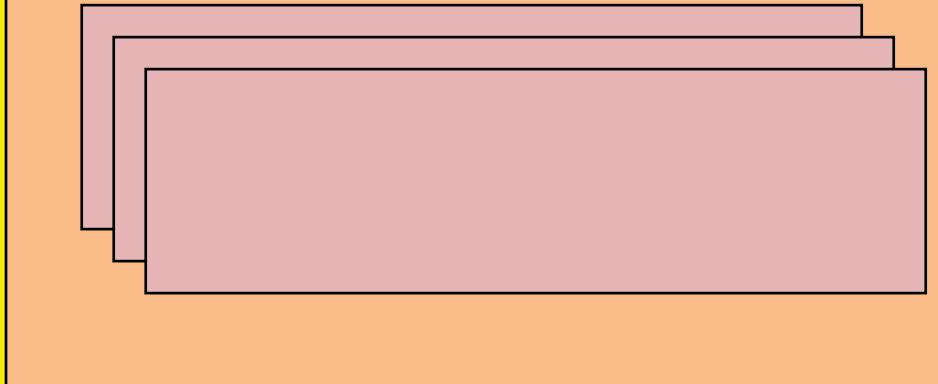

285 **Glossary**

*Add the following terms to the Glossary:*

**Dispense/Dispensation**

290 Dispensation is the act of assigning a medication to a patient, normally as indicated in the corresponding prescription. Since prescriptions can span long periods of time, a single prescription may result in medicines dispensed several times.

**Dispense Item**

295 A Dispense Item belongs to one Dispensation and represents one dispensed medication. It contains the dispensed medicinal product including information such as product code, brand name and packaging information.

**Dosage Instructions**

Dosage Instructions are a set of data elements which together represent the dosage instructions to a medication such as duration of treatment, medication frequency, dose quantity and route of administration.

300 **Community Medication list**

A Community Medication list is a collection of Medication Treatment Plan-, Prescription-, Dispense- or Medication Administration Items (and their related Pharmaceutical Advice Items) representing the Medication information of the patient at a certain point of time and according to business rules specified.

305 **ICA**

ICAs are Intolerances, Contra-indications and Allergies. An ICA may be considered as a relationship between a Patient and a Medicine. A detected problem in a Pharmaceutical Advice may refer to an ICA.

**Medication Dispenser**

310 In the domain of community pharmacy a Medication Dispenser is an abstract actor which dispenses prescribed medication to a patient (generally a healthcare professional, usually a pharmacist when the patient enters the pharmacy to get the prescribed medication).

**Medication**

315 A medication is part of a Prescription Item and defines the actual prescribed drug. It contains the brand or generic name of the drug, national and/or regional drug codes, unit strength, active ingredients and packaging information.

**Medication Brand Name**

The brand name is the name given to a medicine by the pharmaceutical company that makes it. This is also called the "proprietary name".

320 **Medication Generic/Scientific Name**

The generic or scientific name is the term given to the active ingredient in the medicine that is decided by an expert committee and is understood internationally. This is also called the "non-proprietary name".

**Medication Treatment Plan**

- 325 The Medication Treatment Plan of a patient is the collection of all medications the patient was planned to take in the past, presently or in the future. The Medication Treatment Plan is the complete set of all Medication Treatment Plan Items of the patient, i.e., not partitioned or grouped by pathology, planner, organization, etc.

**Medication Treatment Plan Item**

- 330 A Medication Treatment Plan Item is a single medication the patient was planned to take in the past or is planned to take presently or in the future, including its name, dosage, frequency of intake, etc. as well as other information such as patient- and fulfillment instructions and substitution handling. A Medication Treatment Plan Item triggers prescriptions, dispenses or medication administrations in order to fulfill the medication treatment planned by the item.

335 **Pharmaceutical Adviser**

A Pharmaceutical Adviser is an abstract actor which validates Prescription Items issued on a prescription (generally a healthcare professional, usually a pharmacist when the patient enters the pharmacy to get the prescribed medication).

**Pharmaceutical Advice**

- 340 A Pharmaceutical Advice document is the outcome of the validation or review of one Medication Treatment Plan-, Prescription-, Dispense- or Medication Administration Item. It contains the overall result of the validation or review which affects the further processing as well as additional information such as Intolerances, Contra-indications and Allergies (ICAs) and all other information which was discovered during validation or review.

- 345 A Pharmaceutical Advice document is also used to manage Medication Treatment Plan-, Prescription-, Dispense- or Medication Administration Items (e.g., change, cancel, etc.) as well as to document Medication Interaction Checking Issues and their resolutions.

**Pharmaceutical Advice Item**

- 350 A Pharmaceutical Advice Item belongs to one Pharmaceutical Advice and represents the validation outcome, management command or comment regarding the referenced Medication Treatment Plan-, Prescription-, Dispense- or Medication Administration Item (e.g., change, cancel, etc.). It may also carry Medication Interaction Checking Issue information regarding the referenced item.

**Pharmaceutical Advice Concern Item**

- 355 A Pharmaceutical Advice Concern Item belongs to one Pharmaceutical Advice Item and represents the information to concerns (e.g., problems, allergies, etc.) which the Medication

Treatment Plan-, Prescription-, Dispense- or Medication Administration Item referenced by the underlying Pharmaceutical Advice Item causes.

**Prescriber**

- 360 A prescriber is an abstract actor who issues a prescription to a patient (generally a healthcare professional, usually a physician during treatment of a patient).

**Prescription**

- 365 A prescription is issued by one ordering healthcare professional for one patient, in the context of zero or one administrative encounter (between the patient and the ordering physician and/or the healthcare institution).

**Prescription Item**

- 370 A Prescription Item belongs to one prescription and represents one prescribed medication. It may be associated with one or more observations. Prescription Item is the atomic entity for logistics, distribution and billing. It contains the prescribed medicine and dosage information as well as other information to the prescribed item such as patient- and fulfillment instructions and substitution handling.

# Volume 3 – Content Modules

## 5.0 Namespaces and Vocabularies

codeSystem	codeSystemName	Description
1.3.6.1.4.1.19376.1.9	IHE Pharmacy Object Identifiers	This is the root OID for all IHE Pharmacy objects
1.3.6.1.4.1.19376.1.5.3.4		Namespace OID used for IHE Extensions to CDA® <sup>4</sup> Release 2.0

- 375 See also the Namespaces and Vocabularies of the IHE PCC Technical Framework ([PCC TF2/Namespaces and Vocabularies](#)).

## 5.1 IHE Format Codes

Profile	Format Code	Media Type	Template ID
<b>2010 Profiles</b>			
Community Prescription (PRE)	urn:ihe:pharm:pre:2010	text/xml	1.3.6.1.4.1.19376.1.9.1.1.1

380 **6.0 Pharmacy Content Modules**

### 6.3 HL7 Version 3.0 Content Modules

#### 6.3.1 CDA Document Content Modules

*Add Section 6.3.1.1*

#### 6.3.1.1 Community Prescription Specification 1.3.6.1.4.1.19376.1.9.1.1.1

- 385 The Community Prescription specification includes a Prescription section to capture Prescription Items prescribed to a patient as well as supporting sections containing information related to this prescription (e.g., diagnosis, etc.).

Structure	Community Prescription
Format Code	urn:ihe:pharm:pre:2010
LOINC Code	57833-6 (Prescriptions)

<sup>4</sup> CDA is the registered trademark of Health Level Seven International.

Structure	Community Prescription
Document Template ID	1.3.6.1.4.1.19376.1.9.1.1.1
Section name / template ID	Prescription 1.3.6.1.4.1.19376.1.9.1.2.1
Entry name / template ID	Prescription Item 1.3.6.1.4.1.19376.1.9.1.3.2
Medicine Content Entry Module template ID	Medication of Prescription Item 1.3.6.1.4.1.19376.1.9.1.3.1

### 6.3.1.1.1 Format Code

390 The XDSDocumentEntry format code for this content is **urn:ihe:pharm:pre:2010**.

### 6.3.1.1.2 Parent Template

This document is an instance of the [Medical Document](#) template.

### 6.3.1.1.3 Standards

<b>HL7V3 NE2009</b>	<a href="#">HL7 V3 2009 Normative Edition</a>
<b>CDAR2</b>	<a href="#">HL7 CDA Release 2.0</a>
<b>IHE PCC</b>	<a href="#">Medical Documents Specification (1.3.6.1.4.1.19376.1.5.3.1.1.1)</a>
<b>XMLXSL</b>	<a href="#">Associating Style Sheets with XML documents</a>

### 6.3.1.1.4 Data Element Index

Data Elements	CDA Release 2.0
<b>Patient Information</b>	recordTarget/patientRole
Patient Administrative Identifiers	recordTarget/patientRole/id
Patient Name	recordTarget/patientRole/patient/name
Patient Gender	recordTarget/patientRole/patient/administrativeGenderCode
Patient Birth Date	recordTarget/patientRole/patient/birthTime
Patient Address	recordTarget/patientRole/addr
Patient Telecom	recordTarget/patientRole/telecom
<b>HCP Person Information</b>	author
HCP ID(s)	author/assignedAuthor/id
HCP Profession	author/functionCode
HCP Name	author/assignedAuthor/assignedPerson/name
HCP Telecom	author/assignedAuthor/telecom
HCP Specialty	author/assignedAuthor/code
<b>HCP Organization</b>	author/assignedAuthor/representedOrganization
HCP Organization Name	author/assignedAuthor/representedOrganization/name
HCP Organization Address	author/assignedAuthor/representedOrganization/addr

Data Elements	CDA Release 2.0
HCP Organization Telecom	author/assignedAuthor/representedOrganization/telecom
<b>Service Event<sup>5</sup></b>	documentationOf/serviceEvent
Date of Service Event	documentationOf/serviceEvent/effectiveTime
Service Event Code	documentationOf/serviceEvent/code
<b>Encounter in the healthcare institution<sup>6</sup></b>	componentOf/encompassingEncounter
ID of the encounter	componentOf/encompassingEncounter/id
Date of Admission/Encounter start date	componentOf/encompassingEncounter/effectiveTime/low
Date of Discharge/Encounter end date	componentOf/encompassingEncounter/effectiveTime/high
Authorization	authorization/consent
Patient contacts	guardian
Payers	PAYMENT SOURCES
General Medical Information Height, Weight	VITAL SIGNS
Allergies and Drug Sensitivities	ALLERGIES, ADVERSE REACTIONS, ALERTS
Active Problems	PROBLEM LIST
Resolved Problems	HISTORY OF PAST ILLNESS
Immunizations	HISTORY OF IMMUNIZATIONS
Pregnancy History	HISTORY OF PREGNANCIES
Prescription	PRESCRIPTIONS

395

### 6.3.1.1.5 Data Element Specification

Data Element Name	Opt	Template ID
<u>Patient Information</u> Name Personal Identification Gender Date of Birth	R	1.3.6.1.4.1.19376.1.5.3.1.1.1
<u>HCP Person Information</u> Name HCP Identification		
<u>HCP Organization Information</u> Name Address Organization Identifier		

<sup>5</sup> Service Event is optional and may contain service event information of the medical event in which context the prescription has been taken.

<sup>6</sup> Encounter is optional and shall contain encounter information if applicable.

Data Element Name	Opt	Template ID
Contact Information		
<u>Patient Information</u> Address Contact Information	R2	1.3.6.1.4.1.19376.1.5.3.1.1.1
<u>HCP Person Information</u> Profession Specialty		
<u>Patient Information</u> Marital Status Race Ethnicity Religious Affiliation	O	1.3.6.1.4.1.19376.1.5.3.1.1.1
<u>HCP Person Information</u> Contact Information		
Authorization	R2	1.3.6.1.4.1.19376.1.5.3.1.2.5
Patient Contacts	O <sup>7</sup>	1.3.6.1.4.1.19376.1.5.3.1.2.4
Payers	R2	1.3.6.1.4.1.19376.1.5.3.1.1.5.3.7
Coded Vital Signs	O <sup>8</sup>	1.3.6.1.4.1.19376.1.5.3.1.1.5.3.2
Allergies and Other Adverse Reactions	O	1.3.6.1.4.1.19376.1.5.3.1.3.13
Active Problems	O	1.3.6.1.4.1.19376.1.5.3.1.3.6
History of Past Illness	O	1.3.6.1.4.1.19376.1.5.3.1.3.8
Immunizations	O	1.3.6.1.4.1.19376.1.5.3.1.3.23
Pregnancy History	O <sup>9</sup>	1.3.6.1.4.1.19376.1.5.3.1.1.5.3.4
<u>Prescription</u>	R	1.3.6.1.4.1.19376.1.9.1.2.1

Additional explanation:

400 The sections “Coded Vital Signs”, “Allergies and Drug Sensitivities”, “Active Problems”, “Resolved Problems”, “Immunizations”, “Pregnancy History” are considered as sections containing medical information of the patient.

Although real-world projects may require some of these information, no stricter constraints as optional (O) could been applied to these sections in the profile due to the large degree of diversity in business requirements and privacy issues among different current.

<sup>7</sup> In case the patient is governed by a guardian, this element is R and shall contain the information about the guardian

<sup>8</sup> The Coded Vital Signs section should contain at least the height and weight of the patient.

<sup>9</sup> In case the patient is currently pregnant, this element is R and shall contain information about the current pregnancy. It shall not be used to document past pregnancies.

405    **6.3.1.1.6 Conformance**

CDA Release 2.0 documents that conform to the requirements of this content module shall indicate their conformance by the inclusion of the appropriate <templateId> elements in the header of the document. This is shown in the sample document below. A CDA Document may conform to more than one template. This content module inherits from the Medical Summary content module, and so must conform to the requirements of that template as well, thus all <templateId> elements shown in the example below shall be included.

```

415   <ClinicalDocument xmlns='urn:hl7-org:v3'>
416     <typeId extension="POCD_HD000040" root="2.16.840.1.113883.1.3"/>
417     <templateId root='1.3.6.1.4.1.19376.1.5.3.1.1.1' />
418     <templateId root='1.3.6.1.4.1.19376.1.9.1.1.1' />
419     <id root=' ' extension=' ' />
420     <code code='57833-6' displayName='Prescription for medication'
421       codeSystem='2.16.840.1.113883.6.1' codeSystemName='LOINC' />
422     <title>Prescription</title>
423     <effectiveTime value='20100719012005' />
424     <confidentialityCode code='N' displayName='Normal'
425       codeSystem='2.16.840.1.113883.5.25' codeSystemName='Confidentiality' />
426     <languageCode code='en-US' />
427     :
428     <component>
429       <structuredBody>
430         :
431         </structuredBody>
432       </component>
433     </ClinicalDocument>
```

## 6.3.2 CDA Header Content Modules

### 6.3.2.1 Validity of document

435    <documentationOf>


```

        <serviceEvent>
          <effectiveTime>
            ...
          </effectiveTime>
        </serviceEvent>
```

440    </documentationOf>

The validity of the Community Prescription document MAY be defined though the <documentationOf> element.

445    Note: While the <documentationOf> element defines the validity of the Community Prescription document, content elements “repeat number” and “renewal period” control the possible renewal of the dispense of the prescription as show in figure below:

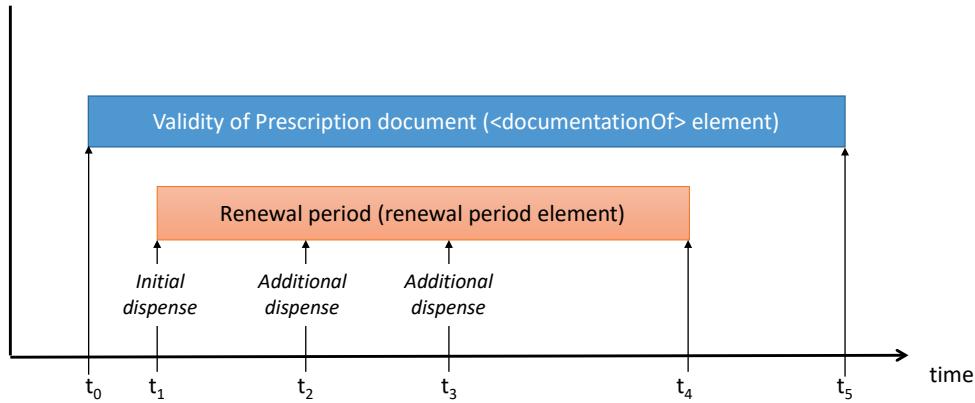

450 The `<documentationOf>` element may define  $t_0$  and  $t_5$  (e.g., prescription is valid 1 year). The `<repeatNumber>` element may constrain the number of additional dispenses that may be performed (here 2, performed at  $t_2$  and  $t_3$ ).

Note: Project governance and legislations define, if just the first dispense or all dispenses must occur within the validity period of the prescription.

The renewal period element may define the time frame or the time period (defined by  $t_1$  and  $t_4$ ) during which dispense(s) may occur.

#### 455 6.3.2.1.1 Validity of prescription

```
<effectiveTime>
  <low value=" --- start of validity of the prescription ---"/>
  <high value="--- end of validity of the prescription ---"/>
</effectiveTime>
```

460 This element SHALL be present and specify the start and end date of the validity period of the prescription, i.e., between which dates interval the prescription may be dispensed. In case the beginning or the ending date is unknown, the `<low>` or `<high>` sub-elements of this element SHALL be set to null flavor “UNK”.

### 6.3.3 CDA Section Content Modules

465 Add Section 6.3.3.1

#### 6.3.3.1 Prescription Section Content Module (1.3.6.1.4.1.19376.1.9.1.2.1)

<b>Template ID</b>	1.3.6.1.4.1.19376.1.9.1.2.1	
<b>Parent Template</b>	-	
<b>General Description</b>	The Prescription Section contains a description of the medications in a given prescription for the patient. It includes one or more Prescription Item entries as described in the Prescription Item Entry Content Module.	
<b>LOINC Code</b>	<b>Opt</b>	<b>Description</b>
57828-6	R	PRESCRIPTIONS
<b>Entries</b>	<b>Opt</b>	<b>Description</b>
1.3.6.1.4.1.19376.1.9.1.3.2	R	Prescription Item Entry Content Module

```

470 <component>
    <section>
        <templateId root='1.3.6.1.4.1.19376.1.9.1.2.1' />
        <id root=' ' extension=' ' />
        <code code='57828-6' displayName='PRESCRIPTIONS'
            codeSystem='2.16.840.1.113883.6.1' codeSystemName='LOINC' />
        <title>Prescriptions</title>
        <text>
            Text as described above
        </text>
        <author>
            :
        </author>
        <!-- 1..n Prescription Items -->
        <!-- Prescription Item 1 -->
        <entry>
            <substanceAdministration classCode='SBADM' moodCode='INT'>
                <templateId root='1.3.6.1.4.1.19376.1.9.1.3.2' />
                :
            </substanceAdministration>
        </entry>
        <!-- Prescription Item 2 -->
        <entry>
            <substanceAdministration classCode='SBADM' moodCode='INT'>
                <templateId root='1.3.6.1.4.1.19376.1.9.1.3.2' />
                :
            </substanceAdministration>
        </entry>
        :
    </section>
</component>

```

### 500 6.3.3.1.1 Parent Templates

This section content module has no parent structure. The value for ‘section/code’ SHALL be “57828-6”, “Prescriptions”.

### 6.3.3.1.2 Prescription Section ID

<id root=' ' extension=' '/>

- 505 A Prescription identifier SHALL be represented in the section <id> Element. The data type of the ID is II.

### 6.3.3.1.3 Section title

<title>...</title>

- 510 A Prescription Section title SHOULD be represented in the section <title> Element. According to CDA R2 rules for structured CDA body, “the absence of the Section.title component signifies an unlabeled section.” (see HL7 Clinical Document Architecture, Release 2.0, 1.3.1 Recipient Responsibilities).

### 6.3.3.1.4 Text

<text>...</text>

- 515 A <text> element SHOULD be represented in the section and contain the narrative version of the Prescription Item. This narrative block SHALL present the information to the human reader and represent the Prescription Item information, using the various structures available in the CDA: tables, lists, paragraphs, hyperlinks, etc.

### 6.3.3.1.5 Prescriber

- 520 <author>...</author>

In the case where the prescriber or the timestamp of a prescription is different from the author and timestamp of the Community Prescription-document, the prescriber and timestamp of the prescription shall be represented by the <author> element of the section.

Data element	HL7 V3 Data Type	CDA Body position (relative XPath expression)
Prescriber Profession	CE	<i>author/functionCode</i>
Timestamp of prescribing	TS	<i>author/time</i>
Prescriber ID	II	<i>author/assignedAuthor/id</i>
Prescriber Specialty	CE	<i>author/assignedAuthor/code</i>
Prescriber Name	PN	<i>author/assignedAuthor/assignedPerson/name</i>
Prescriber Organization Identifier	II	<i>author/assignedAuthor/representedOrganization/id</i>
Prescriber Organization Name	ON	<i>author/assignedAuthor/representedOrganization/name</i>
Prescriber Organization Address	AD	<i>author/assignedAuthor/representedOrganization/addr</i>

525

### 6.3.4 CDA Entry Content Modules

Add Section 6.3.4.1
---------------------

### **6.3.4.1 Medicine Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.1)**

- 530 A Medicine entry describes a medicine and is used within Medication Treatment Plan-, Prescription-, Dispense- or Medication Administration Items. It describes either a medicinal product, a generic/scientific name or a magistral preparation/compound medicine and contains information such as name, medication form, packaging information and active ingredients.
- 535 This entry uses the structure of the HL7 V3 R\_Medication Universal Common Message Element (CMET), Release 2.
- This structure is part of the HL7 V3 2009 Normative Edition (COCT\_RM230100UV). The incorporation of this structure is done according to section **1.4 CDA Extensibility** of the HL7 CDA standard. Such an extension of the base CDA standard is an accepted practice in IHE (e.g., in the XD\* Lab specification).
- 540 For the purposes of IHE Pharmacy this extension is necessary to satisfy the requirements for Prescription, Pharmaceutical Advice and Dispense data elements to represent required information which is not supported by the base CDA standard, such as packaging information, generic equivalent and ingredients.
- 545 The rules of section **1.4 CDA Extensibility** require the designation of a new XML namespace for the XML elements in this structure. For the purposes of documentation, the **namespace urn:ihe:pharm** shall be used.

The following specification and constraints are applied to the structures of the CMET.

#### **6.3.4.1.1 Standards**

- 550 This part describes the general structure for a Prescription Item. It is based on the following standards:

<b>HL7V3 NE2009</b>	<a href="#">HL7 V3 2009 Normative Edition</a>
-------------------------	---

#### **6.3.4.1.2 Parent Template**

This entry content module has no parent structure.

555

### 6.3.4.1.3 Specification

```

<manufacturedMaterial classCode="MMAT" determinerCode="KIND">
    <templateId root="1.3.6.1.4.1.19376.1.9.1.3.1"/>
    <!-- National medicinal product code (brand-level) -->
    <code code="" displayName="" codeSystem="" codeSystemName="" />
    <!-- Brand name -->
    <name>... </name>
    <!-- Pharmaceutical dose form -->
    <pharm:formCode code="" displayName=""
        codeSystem="" codeSystemName="" />
    <lotNumberText>...</lotNumberText>
    <pharm:expirationTime value=' '/>
    <!-- Container information -->
    <pharm:asContent classCode="CONT">
        <pharm:containerPackagedMedicine classCode="CONT" determinerCode="INSTANCE">
            <!-- Medicinal product code (package-level) -->
            <pharm:code code="" displayName="" codeSystem="" codeSystemName="" />
            <!-- Brand name (package) -->
            <pharm:name>...</pharm:name>
            <pharm:formCode code="" displayName=""
                codeSystem="" codeSystemName="" />
            <pharm:capacityQuantity value="" unit="" />
            <pharm:asSuperContent>
                <pharm:containerPackagedMedicine classCode='CONT'
                    determinerCode='INSTANCE'>
                    <pharm:capacityQuantity value=' ' unit=' '/>
                </pharm:containerPackagedMedicine>
            </pharm:asSuperContent>
        </pharm:containerPackagedMedicine>
    </pharm:asContent>
    <!-- These are optional generic equivalents -->
    <pharm:asSpecializedKind classCode="GRIC">
        <pharm:generalizedMedicineClass classCode="MMAT">
            <pharm:code code="" displayName="Generic Equivalent"
                codeSystem="" codeSystemName="" />
            <pharm:name>...</pharm:name>
        </pharm:generalizedMedicineClass>
    </pharm:asSpecializedKind>
    <!-- This is the list of active ingredients -->
    <pharm:ingredient classCode="ACTI">
        <!-- strength of ingredient -->
        <pharm:quantity>
            <numerator xsi:type="PQ" value="" unit="" />
            <denominator xsi:type="PQ" value="" unit="" />
        </pharm:quantity>
        <pharm:ingredient classCode="MMAT" determinerCode="KIND">
            <pharm:code code="" displayName="Active Ingredient 1"
                codeSystem="" codeSystemName="" />
            <pharm:name>Active Ingredient 1</pharm:name>
        </pharm:ingredient>
    </pharm:ingredient>
    <pharm:ingredient classCode="ACTI">
        <!-- strength of ingredient -->
        <pharm:quantity>
            <numerator xsi:type="PQ" value="" unit="" />
            <denominator xsi:type="PQ" value="" unit="" />
        </pharm:quantity>
        <pharm:ingredient classCode="MMAT" determinerCode="KIND">
            <pharm:code code="" displayName="Active Ingredient 2"
                codeSystem="" codeSystemName="" />
            <pharm:name>Active Ingredient 2</pharm:name>
        </pharm:ingredient>
    </pharm:ingredient>
</manufacturedMaterial>

```

620 **6.3.4.1.3.1 Medicine Entry General Specification**

```
<manufacturedMaterial classCode="MMAT" determinerCode="KIND">
```

...

```
</manufacturedMaterial>
```

625 The <manufacturedMaterial> element of the Medicine Entry contains elements using the XML namespace “pharm”.

The namespace “pharm” SHALL be defined at the level of the <manufacturedMaterial> element or at a higher level and SHALL contain the value “**urn:ihe:pharm**”.

Example:

```
<manufacturedMaterial xmlns:pharm="urn:ihe:pharm"
```

630       classCode="MMAT" determinerCode="KIND">

:

**6.3.4.1.3.2 Medicine Entry Template ID**

```
<templateId root='1.3.6.1.4.1.19376.1.9.1.3.1'>
```

The Template ID for a Medicine Entry SHALL be provided.

635 **6.3.4.1.3.3 Code**

```
<code code=' ' displayName=' ' codeSystem=' ' codeSystemName=' '>  
  <originalText>
```

```
    <reference value=' '/>
```

```
  </originalText>
```

640 </code>

The <code> element of the <manufacturedMaterial> element SHALL be present and describes the code of the medication.

The medication may be either

- a brand/product or
- described as a generic/scientific name or
- a descriptor of a magistral preparation/compound medicine

The <originalText> shall contain a <reference> whose URI value points to the name and strength of the medication, or just the name alone if strength is not relevant.

If the medicine is uncoded (e.g., magistral preparations, compound medicine, ...)

650 nullFlavor="NA" SHALL be used.

#### **6.3.4.1.3.4 Name**

**< name>...</ name>**

The element SHALL contain the name of the medication (e.g., “Adol 500mg Caplet”).

The medication may be either

- 655
  - a brand/product or
  - described as a generic/scientific name or
  - a descriptor of a magistral preparation/compound medicine

If the medicine has no brand name (e.g., magistral preparations, compound medicine, ...) nullFlavor=”NA” SHALL be used.

660     

#### **6.3.4.1.3.5 Form Code**

**<pharm:formCode code=' ' displayName=' ' codeSystem=' ' codeSystemName=' '/>**

This code represents the pharmaceutical dose form (e.g., tablet, capsule, liquid) and SHOULD be present, if not implied by the product. It MAY be present if implied by the product. The value of this code affects the units used in the substance administration quantity element.

665     

#### **6.3.4.1.3.6 Lot Number**

**<lotNumberText>...</lotNumberText>**

The <lotNumberText> element MAY be present and is a string representation of a lot number of this specific instance of the product.

670     The provided lot number SHALL refer to the primary packaged item described in the Packaging element.

#### **6.3.4.1.3.7 Expiration Date**

**<pharm:expirationTime value=' '/>**

675     The <pharm:expirationTime> element MAY be present and SHALL contain a value attribute containing the date (e.g., specific date, specific date including time) of expiration of this specific instance of the product.

The value given in the <pharm:expirationTime> element SHALL refer to the primary packaged item described in the Medicine Packaging element.

#### **6.3.4.1.3.8 Packaging**

**<pharm:asContent classCode='CONT'>**  
680       **<pharm:containerPackagedMedicine classCode='CONT'**  
            **determinerCode='INSTANCE'>**  
            **<!-- Medicinal product code (package-level) -->**  
            **<pharm:code code=' ' displayName=' ' codeSystem=' ' codeSystemName=' '/>**

---

```
685    <!-- Brand name (package) -->
<pharm:name>...</pharm:name>
<pharm:formCode code=' ' displayName=' ' codeSystem=' ' codeSystemName=' ' />
<pharm:capacityQuantity value=' ' unit=' ' />
<pharm:asSuperContent>
    <pharm:containerPackagedMedicine classCode='CONT'
        determinerCode='INSTANCE'>
        <pharm:capacityQuantity value=' ' unit=' ' />
    </pharm:containerPackagedMedicine>
    </pharm:asSuperContent>
</pharm:containerPackagedMedicine>
</pharm:asContent>
```

690 695 This structure describes the packaging of the medication and MAY be present. It represents the primary description of the packaging of the medicine (e.g., the medicine is packaged in ampoules of 50ml volume each) and may include additional packaging information of how many of the primary packaged items are within an outer package (e.g., 5 ampoules are packaged in a box).

700 705 The primary description of the package SHOULD be consistent with the given pharmaceutical dose form (<pharm:formCode> of the medication, see chapter “Medication Form Code”). Example: a consistent pharmaceutical dose form to the package form “Ampoules” would be e.g., “Solution for injection”.

In case the package describes a product, the <pharm:code> element provides the code for the product and SHOULD be present.

In case the package describes a product, and the package has a brand name, it SHOULD be described in the <pharm:name> element (e.g., Xylocaine 1% with Adrenaline Inj, 5 injections package).

710 The <pharm:formCode> element represents the form of the package (e.g., tablet container, bottle, ...) and SHOULD be present, if not implied by the product. It MAY be present if implied by the product. It SHALL be present if the <asSuperContent> element is present.

The <pharm:capacityQuantity> element SHALL be present and describes the capacity of the packaging.

715 If the capacityQuantity is given in countable units, the unit attribute SHALL NOT be present. If the capacityQuantity is given in non-countable units, the unit attribute SHALL be present and the value SHALL be out of the UCUM code system.

A <pharm:asSuperContent> element MAY be present to represent the quantity of the given primary packaged item (e.g., ampoule of 50ml) within an outer package (e.g., 5 ampoules in a box). It SHALL contain a <pharm:containerPackagedMedicine> element which SHALL contain a <pharm:capacityQuantity> element describing the quantity of the given primary packaged item present in the outer package. If the capacityQuantity is given in countable units, the unit attribute SHALL NOT be present. If the capacityQuantity is given in non-countable units, the unit attribute SHALL be present and the value SHALL be out of the UCUM code system.

Examples:

725 For example, to represent a medicinal product with pharmaceutical dose form "Tablets", available as a "Tablet container" with 30 tablets the <asContent> data elements would be set to:

```
<pharm:asContent classCode='CONT'
    <pharm:containerPackagedMedicine classCode='CONT'
        determinerCode='INSTANCE'
        :
        <pharm:formCode code=' ' displayName='Tablet container' codeSystem=' '
            codeSystemName=' '/>
        <pharm:capacityQuantity value='30' /> <!-- 30 tablets in the package -->
    </pharm:containerPackagedMedicine>
</pharm:asContent>
```

735 For example, to represent a medicinal product with pharmaceutical dose form "Solution for injection", available as "Ampoules" with 50ml volume, packaged as 5 ampoules per box, the <asContent> data elements would be set to:

```
<pharm:asContent classCode='CONT'
    <pharm:containerPackagedMedicine classCode='CONT'
        determinerCode='INSTANCE'
        :
        <pharm:formCode code=' ' displayName='Ampoules' codeSystem=' '
            codeSystemName=' '/>
        <pharm:capacityQuantity value='50' unit='ml' /> <!-- 50ml per ampoule -->
        <pharm:asSuperContent>
            <pharm:containerPackagedMedicine classCode='CONT'
                determinerCode='INSTANCE'
                <pharm:capacityQuantity value='5' /> <!-- 5 ampoules in a box -->
            </pharm:containerPackagedMedicine>
        </pharm:asSuperContent>
    </pharm:containerPackagedMedicine>
</pharm:asContent>
```

755 Note: The "Ampoule" can be seen as a container representing a volume and as the "unit of use"/"unit of presentation". In this example it only represents container packaging.

#### 6.3.4.1.3.9 Generic Equivalent

```
<pharm:asSpecializedKind classCode='GRIC'
    <pharm:generalizedMedicineClass classCode='MMAT'
        <pharm:code code=' ' displayName=' ' codeSystem=' ' codeSystemName=' '/>
        <pharm:name>...</pharm:name>
```

---

```
</pharm:generalizedMedicineClass>
</pharm:asSpecializedKind>
```

765 The classCode of "GRIC" identifies this structure as the representation of a generic equivalent of the medication described in the current Medicine entry.

One or more elements MAY be present.

The <pharm:code> element contains the coded representation of the generic medicine, and the <pharm:name> element may be used for the plain text representation.

#### 6.3.4.1.3.10 Active Ingredient List

```
770 <pharm:ingredient classCode='ACTI'>
    <pharm:quantity>
        <numerator xsi:type='PQ' value=' ' unit=' '/>
        <denominator xsi:type='PQ' value=' ' unit=' '/>
    </pharm:quantity>
    <pharm:ingredient classCode='MMAT' determinerCode='KIND'>
        <pharm:code code=' ' displayName=' '
            codeSystem='2.16.840.1.113883.6.73' codeSystemName='ATC WHO'>
            <pharm:name>...</pharm:name>
        </pharm:ingredient>
    </pharm:ingredient>
```

780 One or more active ingredients SHOULD be represented with this structure. The classCode of "ACTI" indicates that this is an active ingredient.

785 The <pharm:code> element SHOULD be present and contains the coded representation of the active ingredient. The WHO ATC terminology SHOULD be used to code the active ingredients, where applicable.

The <pharm:name> element SHALL be present and is used for the plain text representation.

790 The medication strength is represented as the ratio of the active ingredient(s) to a unit of medication. The <pharm:quantity> element SHOULD be present and represents the strength of the active ingredient(s) as the ratio of the active ingredient(s) to a unit of medication. The <pharm:quantity> element contains the numerator and denominator of the strength ratio.

The following example shows the strength of 10 mg of the ingredient per ml of the medication:

```
<pharm:quantity>
    <numerator xsi:type="PQ" value="10" unit="mg"/>
    <denominator xsi:type="PQ" value="1" unit="ml"/>
</pharm:quantity>
```

The following examples show the strength of the ingredient in 1 unit of the given medication.

2% of the ingredient (e.g., XYLOPHIL 2% GEL):

800

```
<pharm:quantity>
  <numerator xsi:type="PQ" value="2" unit="%" />
  <denominator xsi:type="PQ" value="1" />
</pharm:quantity>
```

805 5mg of the ingredient (e.g., XYZAL 5MG F.C.TABLET):

810

```
<pharm:quantity>
  <numerator xsi:type="PQ" value="5" unit="mg" />
  <denominator xsi:type="PQ" value="1" />
</pharm:quantity>
```

*Add Section 6.3.4.2*

### 6.3.4.2 Prescription Item Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.2)

815 A Prescription Item belongs to one prescription and represents one prescribed medication. It may be associated with one or more observations. Prescription Item is the atomic entity for logistics, distribution and billing. It contains the prescribed medicine and dosage information as well as other information to the prescribed item such as patient- and fulfillment instructions and substitution handling.

#### 6.3.4.2.1 Standards

820 This part describes the general structure for a Prescription Item. It is based on the following standards:

<b>HL7V3 NE2009</b>	<a href="#">HL7 V3 2009 Normative Edition</a>
<b>CCD</b>	<a href="#">ASTM/HL7 Continuity of Care Document</a>
<b>IHE PCC</b>	<a href="#">Medications Entry (1.3.6.1.4.1.19376.1.5.3.1.4.7)</a>

#### 6.3.4.2.2 Parent Template

825 This entry content module is based on the HL7 CCD template medication activity 2.16.840.1.113883.10.20.1.24 and inherits the structure of the Medication Entry Content Module, 1.3.6.1.4.1.19376.1.5.3.1.4.7.

#### 6.3.4.2.3 Specification

This section makes use of the medicine and instruction entry content modules.

830

This specification relies on the PCC Medication Entry Content Module  
(1.3.6.1.4.1.19376.1.5.3.1.4.7) specification and only describes additional constraints.

- 835     The chapters below identify and describe these fields, and indicate the constraints on whether or  
          not they are required to be sent. The fields are listed in the order that they appear in the CDA  
          XML content.

```

840 <substanceAdministration classCode='SBADM' moodCode='INT'>
841   <templateId root='2.16.840.1.113883.10.20.1.24' />
842   <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.7' />
843   <templateId root='1.3.6.1.4.1.19376.1.9.1.3.2' />
844   <templateId root='1.3.6.1.4.1.19376.1.9.1.3.6' />
845   <id root=' ' extension=' ' />
846   <code code=' ' codeSystem=' ' displayName=' ' codeSystemName=' ' />
847   <text><reference value="#med-1"/></text>
848   <statusCode code='completed'/>
849   <effectiveTime xsi:type='IVL_TS'>
850     <low value=' ' />
851     <high value=' ' />
852   </effectiveTime>
853   <effectiveTime operator='A' xsi:type='TS|PIVL_TS|EIVL_TS|PIVL_PPD_TS|SXPR_TS'>
854     :
855   </effectiveTime>
856   <repeatNumber value=' ' />
857   <routeCode code=' ' codeSystem=' ' displayName=' ' codeSystemName=' ' />
858   <approachSiteCode code=' ' codeSystem=' ' displayName=' ' codeSystemName=' ' />
859   <doseQuantity value=' ' unit=' ' />
860   <rateQuantity value=' ' unit=' ' />
861   <consumable>
862     <manufacturedProduct" classCode="MANU">
863       <templateId root="1.3.6.1.4.1.19376.1.5.3.1.4.7.2" />
864       <templateId root="2.16.840.1.113883.10.20.1.53" />
865       <manufacturedMaterial xmlns:pharm="urn:ihe:pharm
866         classCode="MMAT" determinerCode="KIND">
867         :
868         <!-- Medicine Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.1) -->
869         :
870       </manufacturedMaterial>
871     </manufacturedProduct>
872   </consumable>
873   <!--
874     Author(s) in case of usage elsewhere as in a PRE document
875   -->
876   <author>...</author>
877   <author>...</author>
878   <!-- 0..* entries describing the components -->
879   <entryRelationship typeCode='COMP' >
880     <sequenceNumber value=' ' />
881     :
882   </entryRelationship>
883   <!-- An optional entry relationship that indicates the reason for use -->
884   <entryRelationship typeCode='RSON'>
885     <act classCode='ACT' moodCode='EVN'>
886       <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.4.1' />
887       <id root=' ' extension=' ' />
888     </act>
889   </entryRelationship>
890   <!-- An optional entry relationship that refers to the corresponding MTP Item -->
891   <entryRelationship typeCode='REFR'>
892     <substanceAdministration classCode='SBADM' moodCode='INT'>
893       <templateId root='1.3.6.1.4.1.19376.1.9.1.3.10' /> <!-- PHARM -->
894       ...
895       </substanceAdministration>
896   </entryRelationship>
897   <!-- Reference to a related prescription activity (supply) -->
898   <entryRelationship typeCode='REFR'>
899     <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.7.3' />
900     :
901   </entryRelationship>
902   <!-- Optional instructions for the patient -->
903   <entryRelationship typeCode='SUBJ' inversionInd='true'>
904     <act classCode='ACT' moodCode='INT'>
905       <templateId root='2.16.840.1.113883.10.20.1.49' />
906       <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.3' />

```

```

905      <code code='PINSTRUCT' codeSystem='1.3.6.1.4.1.19376.1.5.3.2'
         codeSystemName='IHEActCode' />
         ...
         </entryRelationship>
         <!-- Optional instructions for Pharmacist -->
         <entryRelationship typeCode='SUBJ' inversionInd='true'>
             <act classCode='ACT' moodCode='INT'>
                 <templateId root='2.16.840.1.113883.10.20.1.43' />
                 <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.3.1' />
                 <code code='FINSTRUCT' codeSystem='1.3.6.1.4.1.19376.1.5.3.2'
                     codeSystemName='IHEActCode' />
                     ...
                     </entryRelationship>
                     <!-- Amount of units of the consumable to dispense -->
                     <entryRelationship typeCode='COMP'>
                         <supply classCode='SPLY' moodCode='RQO'>
                             <templateId root='1.3.6.1.4.1.19376.1.9.1.3.8' /> <!-- PHARM -->
                             <independentInd value='false' />
                             <quantity value=' ' unit=' '/>
                         </supply>
                     </entryRelationship>
                     <!-- Substitution permission -->
                     <entryRelationship typeCode='COMP'>
                         <act classCode="ACT" moodCode="DEF">
                             <templateId root='1.3.6.1.4.1.19376.1.9.1.3.9.1' /> <!-- PHARM SubstitutionPermission -->
                             <code code='E' codeSystem='2.16.840.1.113883.5.1070' displayName='equivalent'
                                 codeSystemName='HL7 Substance Admin Substitution' />
                             <statusCode code="completed" />
                         </act>
                     </entryRelationship>
                     <!-- Optional renewal Period -->
                     <entryRelationship typeCode="COMP">
                         <supply classCode="SPLY" moodCode="RQO">
                             <templateId root="1.3.6.1.4.1.19376.1.9.1.3.15" />
                             ...
                         </supply>
                     </entryRelationship>
                     <precondition>
                         <criterion>
                             <text><reference value=' '></text>
                         </criterion>
                     </precondition>
                 </substanceAdministration>

```

### 6.3.4.2.3.1 Prescription Item Entry General Specification

```

950     <substanceAdministration classCode='SBADM' moodCode='INT'>
         ...
     </substanceAdministration>

```

The moodCode SHALL be set to INT.

Note: Rational for using moodCode “INT”

Strictly speaking, according to HL7, the moodCode RQO (“request order”) is a more appropriate substanceAdministration/moodCode for prescriptions than INT. RQO is a specialization of INT and should be used if the prescription is clearly a prescription in the meaning of an “order”.

In some cases a prescription is clearly an “order” for execution (e.g., usually in hospital setting, where its execution is mostly driven by defined processes). In other cases a prescription given to

960 a patient by a physician usually remains from that on in the authority of the patient him- or  
herself, relatives or other persons (e.g., in community setting). The patient usually decides in the  
end whether or not he/she retrieves the prescribed medication from the Community Pharmacy  
and takes it. Thus in some cases prescriptions might not clearly be seen as strict orders, but also  
as mere intents for the patient to take the medication. At least when collecting and summarizing  
Prescription Items in e.g., a Medication list, the ordering aspect of the prescription items gets  
965 almost entirely diminished.

Since the Prescription Item Entry does not always document a prescription in the strict sense, the more general moodCode “INT” is used.

See PCC TF-2, Medication Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.7) specification.

#### **6.3.4.2.3.2 Prescription Item Entry TemplateID**

970 <templateId root='2.16.840.1.113883.10.20.1.24' /> <!-- CCD -->  
<templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.7' /> <!-- PCC -->  
<templateId root='1.3.6.1.4.1.19376.1.9.1.3.2' /> <!-- PHARM -->

A templateId of '1.3.6.1.4.1.19376.1.9.1.3.2' SHALL be present to indicate that this entry is conforming to the Prescription Item Entry Content Module.

975 See PCC TF-2, Medication Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.7) specification.

### **6.3.4.2.3.3 Prescription Item Entry Additional Template ID**

```
<templateId root=' '/>
```

The `<templateId>` element identifies this `<entry>` as a particular type of medication event, allowing for validation of the content.

980 The templateId must use one of the values in the table below for the root attribute.

Root	Description
1.3.6.1.4.1.19376.1.5.3.1.4.7.1	A "normal" <substanceAdministration> act that may not contain any subordinate <substanceAdministration> acts.
1.3.6.1.4.1.19376.1.5.3.1.4.8	A <substanceAdministration> act that records tapered dose information in subordinate <substanceAdministration> acts.
1.3.6.1.4.1.19376.1.5.3.1.4.9	A <substanceAdministration> act that records split dose information in subordinate <substanceAdministration> acts.
1.3.6.1.4.1.19376.1.5.3.1.4.10	A <substanceAdministration> act that records conditional dose information in subordinate <substanceAdministration> acts.
1.3.6.1.4.1.19376.1.5.3.1.4.11	A <substanceAdministration> act that records combination medication component information in subordinate <substanceAdministration> acts.

See PCC TF-2, Medication Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.7) specification.

#### **6.3.4.2.3.4 Prescription Item ID**

985    **<id root=' ' extension=' '/>**

This ID represents the Prescription Item ID and SHALL be present.

See PCC TF-2, Medication Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.7) specification.

#### **6.3.4.2.3.5 Code**

**<code code=' ' displayName=' ' codeSystem=' ' codeSystemName=' '/>**

990    See PCC TF-2, Medication Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.7) specification.

#### **6.3.4.2.3.6 Narrative Text**

**<text><reference value=' '/></text>**

995    This element SHALL be present. The URI given in the value attribute of the <reference> element points to an element in the narrative content that contains the complete text describing the medication prescribed.

See PCC TF-2, Medication Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.7) specification.

#### **6.3.4.2.3.7 Status Code**

**<statusCode code='completed'>**

See PCC TF-2, Medication Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.7) specification.

1000    Please note that this element does NOT represent the status of the Prescription Item (e.g., still open, already dispensed, etc.). There is no dedicated data element to record such a status, please refer to the Community Medication Prescription and Dispense (CMPD) Profile for more information.

#### **6.3.4.2.3.8 Dosage Instructions**

1005    The Prescription Item SHALL contain dosage instructions according to the specification of the dosage instructions in the Dosage Instructions Content Module (1.3.6.1.4.1.19376.1.9.1.3.6).

Note: The following elements part of the Dosage Instructions:

- Prescription Item Entry Additional Template ID
- Effective Time (Duration of Treatment)
- Medication Frequency
- Route of Administration
- Approach Site Code
- Dose Quantity
- Rate Quantity

1015       • Related Components

#### **6.3.4.2.3.9 Number of repeats/refills**

<repeatNumber value=' '/>

The <repeatNumber> element SHALL be present, and SHALL contain the number of allowed repeats/refills of the Prescription Item.

1020 If the <repeatNumber> element has a value of zero no repeat/refill is allowed (single dispense). The total number of dispenses will be thus equal to the repeat number plus one.

If the repeatNumber is not limited (e.g., in case a renewal duration is defined), this element SHALL be set to nullFlavor='NI'.

#### **6.3.4.2.3.10 Consumable**

1025 <consumable>

```
<manufacturedProduct classCode="MANU">
  <templateId root="1.3.6.1.4.1.19376.1.5.3.1.4.7.2"/>
  <templateId root="2.16.840.1.113883.10.20.1.53"/>
  <manufacturedMaterial classCode="MMAT" determinerCode="KIND">
    :
    <!-- Medicine Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.1) -->
    :
  </manufacturedMaterial>
</manufacturedProduct>
```

1035 </consumable>

The <consumable> element SHALL be present, and SHALL contain a <manufacturedProduct> element.

The <manufacturedProduct> element SHALL contain a <manufacturedMaterial> element.

1040 The <manufacturedMaterial> element SHALL contain a Medicine Entry, conforming to the Medicine Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.1).

See PHARM TF-3, Medicine Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.1) specification.

#### **6.3.4.2.3.11 Prescriber**

<author>...</author>

1045 In the case that the Prescription Item is used within a Community Prescription document according to the “Community Prescription” (PRE) Profile this element SHALL NOT be present.

In all other cases (e.g., when used in a “Community Medication List” document according to the PML Profile or in medication sections of other documents as for example Discharge Summaries, etc.) this element SHOULD be present and represent the prescriber and timestamp of the Prescription Item.

- 1050 This first author element SHALL be present in case that the “Community Prescription document author” is present (see chapter 6.3.4.2.3.12).

The table below shows the meaning of the data elements of this <author> element. It SHOULD be corresponding to the <author> element of the Community Prescription document or, if given, the <author> element of the Prescription section within the Community Prescription document.

1055

Data element	HL7 V3 Data Type	CDA Body position (relative XPath expression)
Prescriber Profession	CE	<i>author/functionCode</i>
Timestamp of prescribing	TS	<i>author/time</i>
Prescriber ID	II	<i>author/assignedAuthor/id</i>
Prescriber Specialty	CE	<i>author/assignedAuthor/code</i>
Prescriber Name	PN	<i>author/assignedAuthor/assignedPerson/name</i>
Prescriber Organization Identifier	II	<i>author/assignedAuthor/representedOrganization/id</i>
Prescriber Organization Name	ON	<i>author/assignedAuthor/representedOrganization/name</i>
Prescriber Organization Address	AD	<i>author/assignedAuthor/representedOrganization/addr</i>

### 6.3.4.2.3.12 Community Prescription document author

<author>...</author>

In the case that the Prescription Item is used within a Community Prescription document according to the “Community Prescription” (PRE) Profile this element SHALL NOT be present.

- 1060 If the author of the Community Prescription document is already present in the “Prescriber” element (see chapter above) this element SHALL NOT be present.

In all other cases (e.g., when used in a “Community Medication List” document according to the PML Profile or in medication sections of other documents as for example Discharge Summaries, etc.) this element MAY be present and represent the author and timestamp of the Community Prescription document.

- 1065 The table below shows the meaning of the data elements of this <author> element. It SHALL be corresponding to the <author> element of the Community Prescription document header.

Data element	HL7 V3 Data Type	CDA Body position (relative XPath expression)
Community Prescription document author Profession	CE	<i>author/functionCode</i>
Timestamp of document creation	TS	<i>author/time</i>
Community Prescription document author ID	II	<i>author/assignedAuthor/id</i>
Community Prescription document author Specialty	CE	<i>author/assignedAuthor/code</i>
Community Prescription document author Name	PN	<i>author/assignedAuthor/assignedPerson/name</i>
Community Prescription document author Organization Identifier	II	<i>author/assignedAuthor/representedOrganization/id</i>
Community Prescription document author Organization Name	ON	<i>author/assignedAuthor/representedOrganization/name</i>
Community Prescription document author Organization Address	AD	<i>author/assignedAuthor/representedOrganization/addr</i>

#### 6.3.4.2.3.13 Reason

1070    <entryRelationship typeCode='RSON'>  
           <act classCode='ACT' moodCode='EVN'>  
             <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.4.1'>  
             <id root=' ' extension=' '/>  
           </act>

1075    </entryRelationship>

See PCC TF-2, Medication Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.7) specification.

#### 6.3.4.2.3.14 Reference to Medication Treatment Plan Item

<entryRelationship typeCode='REFR'>

---

```
<substanceAdministration classCode='SBADM' moodCode='INT'>
1080    <templateId root='1.3.6.1.4.1.19376.1.9.1.3.10'/_> <!-- PHARM -->
    ...
<consumable>
    <manufacturedProduct>
        <manufacturedMaterial nullFlavor='NA'/_>
1085    </manufacturedProduct>
    </consumable>
</substanceAdministration>
</entryRelationship>
```

If the Prescription Item is related to a Medication Treatment Plan Item, the reference to it  
1090 SHALL be present IF KNOWN and SHALL contain a Reference to Medication Treatment Plan  
Item Entry, conforming to the Reference to Medication Treatment Plan Item Entry template  
(1.3.6.1.4.1.19376.1.9.1.3.10). See PHARM TF-3, Reference to Medication Treatment Plan Item  
Entry Module (1.3.6.1.4.1.19376.1.9.1.3.10) specification.

#### **6.3.4.2.3.15 Reference to a related prescription activity (supply)**

```
1095 <entryRelationship typeCode='REFR'>
    <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.7.3'/_>
    —:
    </entryRelationship>
```

See PCC TF-2, Medication Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.7) specification.  
1100 This element SHALL NOT be present.

#### **6.3.4.2.3.16 Patient Medication Instructions**

```
<entryRelationship typeCode='SUBJ' inversionInd='true'>
    <act classCode='ACT' moodCode='INT'>
        <templateId root='2.16.840.1.113883.10.20.1.49'/_>
1105    <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.3'/_>
        <code code='PINSTRUCT' codeSystem='1.3.6.1.4.1.19376.1.5.3.2'
            codeSystemName='IHEActCode' />
        ...
</entryRelationship>
```

1110 At most one instruction MAY be provided for each <substanceAdministration> entry. When present, this entry relationship SHALL contain a [Patient Medication Instructions](#) (1.3.6.1.4.1.19376.1.5.3.1.4.3) entry.

Patient Medication Instructions (used in a Prescription Item) are comments from “prescriber to patient” and may contain the following information:

- 1115
- Human readable dosage instructions (e.g., a representation of the structured dosage instructions as narrative text, any special dosage instructions which could not have been represented in structured way, etc.)
  - General comments by the prescriber to the patient (e.g., “take with food”, etc.)

#### **6.3.4.2.3.17 Fulfillment Instructions**

1120 <entryRelationship typeCode='SUBJ' inversionInd='true'>  
    <act classCode='ACT' moodCode='INT'>  
        <templateId root='2.16.840.1.113883.10.20.1.43'/>  
        <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.3.1'/>  
        <code code='FINSTRUCT' codeSystem='1.3.6.1.4.1.19376.1.5.3.2'  
            codeSystemName='IHEActCode' />  
    ...  
  </entryRelationship>

At most one instruction MAY be provided for each <substanceAdministration> entry.-When present, this entry relationship SHALL contain a [Medication Fulfillment Instructions](#) (1.3.6.1.4.1.19376.1.5.3.1.4.3.1) entry.

Fulfillment Instructions (used in a Prescription Item) are comments from “prescriber to dispenser” and may contain the following information:

- 1130
- A proposal of a product/brand including information about substitution in case of prescribing Generic/Scientific names (e.g., Prescriber prescribes the generic “Paracetamol” but proposes the product “Adol 500mg Caplet” to be dispensed because the patient is used to that medicine)
  - Information to the preparation of compound medicine (e.g., “20 capsules of phenytoin, 20 ml glycerin, 2ml alcohol, Q.S. Syrup to 200ml”)
  - General comments by the prescriber to the dispenser (e.g., if the patient is very old: “Patient is instructed about the dosing, but please repeat the instruction to ensure that the patient understood how to intake the medicine”)
- 1140

#### **6.3.4.2.3.18 Amount of units of the consumable to dispense**

<entryRelationship typeCode='COMP'>

```
<supply classCode='SPLY' moodCode='RQO'>
```

1145       ...

```
</supply>
```

```
</entryRelationship>
```

This element MAY be present and describes the amount of units to be dispensed. If present, it shall contain a quantity conforming to the Amount of units of the consumable Entry template (1.3.6.1.4.1.19376.1.9.1.3.8). See PHARM TF-3, Amount of units of the consumable Entry Module (1.3.6.1.4.1.19376.1.9.1.3.8) specification.

#### **6.3.4.2.3.19 Substitution permission**

```
<entryRelationship typeCode='COMP'>
```

```
  <act classCode="ACT" moodCode="DEF">
```

1155        <templateId root='1.3.6.1.4.1.19376.1.9.1.3.9.1'>

      ...

```
  </act>
```

```
</entryRelationship>
```

One or more <entryRelationship> elements, each containing a Substitution Permission Entry, MAY be present and describe the substitution permission. If present, it SHALL contain a Substitution Permission Entry conforming to the Substitution Permission Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.9.1).

See PHARM TF-3, Substitution Permission Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.9.1) specification.

1165       **6.3.4.2.3.20 Renewal Period**

```
<entryRelationship typeCode="COMP">
```

```
  <supply classCode="SPLY" moodCode="RQO">
```

```
    <templateId root="1.3.6.1.4.1.19376.1.9.1.3.15"/> <!-- PHARM -->
```

      ...

1170       </supply>

```
</entryRelationship>
```

The Prescription Item MAY contain a renewal period according to the specification of the Renewal Period Content Module (1.3.6.1.4.1.19376.1.9.1.3.15).

#### **6.3.4.2.3.21 ID of parent container (Community Prescription document)**

1175       <reference typeCode='XCRPT'>

```
<externalDocument>
  <id root=' ' extension=' '/>
</externalDocument>
</reference>
```

- 1180 In the case that the Prescription Item is used within a Community Prescription document according to the “Community Prescription” (PRE) Profile this element SHALL NOT be present. In all other cases (e.g., when used in a “Community Medication List” document according to the PML Profile or in medication sections of other documents as for example Discharge Summaries, etc.) this element SHOULD be present and contain the identifier of the Community Prescription document, the Prescription Item initially has been created.
- 1185

#### 6.3.4.2.3.22 Precondition Criterion

```
<precondition>
  <criterion>
    <text><reference value=' ' /></text>
  </criterion>
</precondition>
```

- In a CDA document, the preconditions for use of the medication are recorded in the `<precondition>` element. The value attribute of the `<reference>` element is a URL that points to the CDA narrative describing those preconditions.
- 1190 This element MAY be present.

See PCC TF-2, Medication Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.7) specification.

#### 6.3.4.6 Dosage Instructions Content Module (1.3.6.1.4.1.19376.1.9.1.3.6)

- Dosage Instructions are a set of data elements which together represent the dosage instructions to a medication such as duration of treatment, medication frequency, dose quantity, route of administration, etc.
- 1200

Dosage Instructions may be provided structured and/or narrative. This chapter describes *structured* dosage instructions.

If dosage instructions are provided *narrative only*, the Dosage Instructions data elements SHALL NOT be present as a whole.

- 1205 **6.3.4.6.1 Standards**

This part describes the general structure for a Dosage Instructions. It is based on the following standards:

<b>HL7V3 NE2009</b>	<a href="#">HL7 V3 2009 Normative Edition</a>
<b>CDAR2</b>	<a href="#">HL7 CDA Release 2.0</a>

#### 6.3.4.6.2 Parent Template

1210 This content module has no parent structure.

#### 6.3.4.6.3 Specification

The chapters below identify and describe these fields, and indicate the constraints on whether or not they are required to be sent. The fields are listed in the order that they appear in the CDA XML content.

1215

```
<substanceAdministration classCode='SBADM' moodCode='INT|EVN'>
  :
  <templateId root='1.3.6.1.4.1.19376.1.9.1.3.6'>
    :
    <effectiveTime xsi:type='IVL_TS'>
      <low value=' ' />
      <high value=' ' />
    </effectiveTime>
    <effectiveTime operator='A' xsi:type='TS|PIVL_TS|EIVL_TS|PIVL_PPD_TS|SXPR_TS'>
      ...
    </effectiveTime>
    :
    <routeCode code=' ' codeSystem=' ' displayName=' ' codeSystemName=' ' />
    <approachSiteCode code=' ' codeSystem=' ' displayName=' ' codeSystemName=' ' />
    <doseQuantity value=' ' unit=' ' />
    <rateQuantity value=' ' unit=' ' />
    :
    <!-- 0..* entries describing the components -->
    <entryRelationship typeCode='COMP' >
      <sequenceNumber value=''/>
      :
      <consumable>
        <manufacturedProduct>
          <manufacturedMaterial nullFlavor='NA' />
        </manufacturedProduct>
      </consumable>
      :
    </entryRelationship>
    :
  </substanceAdministration>
```

1220

1225

1230

1235

1240

1245

#### 6.3.4.6.3.1 Dosage Instructions General Specification

< substanceAdministration classCode='SBADM' moodCode='INT|EVN'>

1250

...</substanceAdministration>

The Dosage Instructions are part of a <substanceAdministration> element.

The <substanceAdministration> element itself as well as additional constraints applying to this <substanceAdministration> element (e.g., other applying content module constraints such as IHE PHARM “Prescription Item”) are specified in the parent specification using this content module.

1255 **6.3.4.6.3.2 Dosage Instructions TemplateID**

<templateId root='1.3.6.1.4.1.19376.1.9.1.3.6'>                   <!-- PHARM -->

The <templateId> element identifies this <entry> as a particular type of event, allowing for validation of the content.

The templateId SHALL be set to the value 1.3.6.1.4.1.19376.1.9.1.3.6.

1260 **6.3.4.6.3.3 Dosage Instructions Additional Template ID**

<templateId root=' '/>

This templateId declares which type of dosage instructions (“normal dosing”, “split dosing”, etc.) is used.

The templateId SHALL be present.

1265 In case (structured) dosage instructions are not provided (e.g., because they are only provided as narrative text), this element SHALL be set to “Normal Dosing”.

The templateId SHALL use one of the values in the table below for the root attribute.

<b>Root</b>	<b>Description</b>
1.3.6.1.4.1.19376.1.5.3.1.4.7.1	A “normal” <substanceAdministration> act that may not contain any subordinate <substanceAdministration> acts.
1.3.6.1.4.1.19376.1.5.3.1.4.8	A <substanceAdministration> act that records tapered dose information in subordinate <substanceAdministration> act.
1.3.6.1.4.1.19376.1.5.3.1.4.9	A <substanceAdministration> act that records split dose information in subordinate <substanceAdministration> acts.
1.3.6.1.4.1.19376.1.5.3.1.4.10	A <substanceAdministration> act that records conditional dose information in subordinate <substanceAdministration> acts.
1.3.6.1.4.1.19376.1.5.3.1.4.11	A <substanceAdministration> act that records combination medication component information in subordinate <substanceAdministration> acts.

1270 The constraints defined for this element in PCC TF2, Medication Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.7) specification apply to this element.

**6.3.4.6.3.4 Effective Time (Duration of Treatment)**

<effectiveTime xsi:type='IVL\_TS'>

1275 In case the (structured) dosage instructions include a dose regime<sup>10</sup> this element SHALL be present and specify the entire duration of the medication treatment. In case the Duration of Treatment is unknown the <low> and <high> sub-elements of this element SHALL be set to null flavor “UNK”.

If dosage instructions are provided *narrative only*, this element SHALL NOT be present.

In all other cases this element MAY be present.

1280 The constraints defined for this element in PCC TF-2, Medication Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.7) specification apply to this element.

#### **6.3.4.6.3.5 Medication frequency**

<effectiveTime operator='A'

xsi:type='TS|PIVL\_TS|EIVL\_TS|PIVL\_PPD\_TS|SXPR\_TS' />

1285 In case the (structured) dosage instructions include a dose regime using “Normal Dosing”, this element SHALL be present and SHALL NOT be null flavor.

If dosage instructions are provided *narrative only*, this element SHALL NOT be present.

In all other cases this element MAY be present.

1290 The constraints defined for this element in PCC TF2, Medication Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.7) specification apply to this element.

#### **6.3.4.6.3.6 Route of Administration**

<routeCode code=' ' displayName=' ' codeSystem=' ' codeSystemName=' ' />

If dosage instructions are provided *narrative only*, this element SHALL NOT be present.

In all other cases this element MAY be present.

1295 The constraints defined for this element in PCC TF-2, Medication Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.7) specification apply to this element.

#### **6.3.4.6.3.7 Approach Site Code**

<approachSiteCode code=' ' displayName=' ' codeSystem=' ' codeSystemName=' ' />

If dosage instructions are provided *narrative only*, this element SHALL NOT be present.

1300 In all other cases this element MAY be present.

The constraints defined for this element in PCC TF-2, Medication Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.7) specification apply to this element.

---

<sup>10</sup> For the scope of this Content Module, “dose regime” groups the data elements Medication Frequency, Dose Quantity and Rate Quantity, provided in a certain type of dosing (“Normal dosing”, “Split dosing”, etc.)

#### **6.3.4.6.3.8 Dose Quantity**

<doseQuantity value=' ' unit=' '/>

1305 In case the (structured) dosage instructions include a dose regime using “Normal Dosing”, this element SHALL be present and SHALL NOT be null flavor.

If dosage instructions are provided *narrative only*, this element SHALL NOT be present.

In all other cases this element MAY be present.

The constraints defined for this element in PCC TF-2, Medication Entry Module

1310 (1.3.6.1.4.1.19376.1.5.3.1.4.7) specification apply to this element.

#### **6.3.4.6.3.9 Rate Quantity**

<rateQuantity value=' ' unit=' '/>

In case the (structured) dosage instructions include a dose regime using “Normal Dosing”, this element SHALL be present and SHALL NOT be null flavor.

1315 If dosage instructions are provided *narrative only*, this element SHALL NOT be present.

In all other cases this element MAY be present.

The constraints defined for this element in PCC TF-2, Medication Entry Module

(1.3.6.1.4.1.19376.1.5.3.1.4.7) specification apply to this element.

#### **6.3.4.6.3.10 Related components**

1320 <entryRelationship typeCode='COMP'>

    <sequenceNumber value=''/>

    :

    <consumable>

        <manufacturedProduct>

            <manufacturedMaterial nullFlavor='NA'/'>

        </manufacturedProduct>

    </consumable>

    :

  </entryRelationship>

1330 In case the (structured) dosage instructions include a dose regime using “Normal Dosing”, subordinate <substanceAdministration> entries SHALL NOT be present.

If dosage instructions are provided *narrative only*, subordinate <substanceAdministration> entries SHALL NOT be present.

- 1335 In case the (structured) dosage instructions include a dose regime using other types than “Normal Dosing”, one or more subordinate <substanceAdministration> entries SHALL be present.
- In case subordinate <substanceAdministration> entries are present, the <consumable> element of subordinate <substanceAdministration> entries SHALL NOT contain a medicine, but the <manufacturedProduct/manufacturedMaterial> element SHALL be set to nullFlavor='NA'.
- The constraints defined for this element in PCC TF-2, Medication Entry Module (1.3.6.1.4.1.19376.1.5.3.1.4.7) specification apply to this element.

#### **6.3.4.7 Amount of units of the consumable Content Module (1.3.6.1.4.1.19376.1.9.1.3.8)**

The Amount of units of the consumable Content Module describes the quantity of the enclosing <consumable> element.

1345 **6.3.4.7.1 Standards**

This part describes the general structure for an Amount of units of the consumable Content Module. It is based on the following standards:

<b>HL7V3 NE2009</b>	<a href="#">HL7 V3 2009 Normative Edition</a>
-------------------------	---

1350 **6.3.4.7.2 Parent Template**

This content module has no parent structure.

#### **6.3.4.7.3 Specification**

The chapters below identify and describe these fields, and indicate the constraints on whether or not they are required to be sent. The fields are listed in the order that they appear in the CDA XML content.

```
<entryRelationship typeCode='COMP'>
  <supply classCode='SPLY' moodCode='RQO'>
    <templateId root='1.3.6.1.4.1.19376.1.9.1.3.8' /> <!-- PHARM -->
    <independentInd value='false' />
    <quantity value=' ' unit=' ' />
  </supply>
</entryRelationship>
```

1365 **6.3.4.7.3.1 Amount of units of the consumable General Specification**

```
<entryRelationship typeCode='COMP'>
  <supply classCode='SPLY' moodCode='RQO'>
```

```
<templateId root='1.3.6.1.4.1.19376.1.9.1.3.8'>
<independentInd value='false'>
```

1370 ...

```
</supply>
</entryRelationship>
```

#### **6.3.4.7.3.2 Amount of units of the consumable Template ID**

```
<templateId root='1.3.6.1.4.1.19376.1.9.1.3.8'>
```

1375 The Template ID for an Amount of units of the consumable Content Module SHALL be provided.

#### **6.3.4.7.3.3 Amount of units of the consumable independentInd**

```
<independentInd value='false'>
```

The <independentInd> SHALL be present and SHALL contain a value set to “false”.

1380 **6.3.4.7.3.4 Amount of units of the consumable Quantity**

```
<quantity value=' ' unit=' '/>
```

The Amount of units of the consumable Content Module describes the quantity of the enclosing <consumable> element.

- If the enclosing <consumable> - element also contains package information, the <quantity> element SHALL contain the amount of primary packaged items of the medication. The value shall refer to the primary layer of the package information given in the <pharm:asContent> element of the consumable (e.g., if the value is 2 and the <pharm:asContent> element describes a blister containing 30 tablets, this means that 2 blisters (with each 30 tablets in it) have been prescribed). Eventually present sub- or super layers of packaging (subContent, asSuperContent elements below the asContent element) are not affected. In this case the unit attribute SHALL NOT be present.

- If the enclosing <consumable> - element does not contain package information, the <quantity> element SHALL contain the amount of consumable units of the medication. In this case the unit attribute MAY be present, if the quantity is in non-countable units.

1395 The value of the unit SHALL be out of the UCUM code system.

#### **6.3.4.8 Substitution Permission Content Module (1.3.6.1.4.1.19376.1.9.1.3.9.1)**

An <entryRelationship> element, containing exactly one element describing the substitution permission.

1400 **6.3.4.8.1 Standards**

This part describes the general structure for a Substitution Permission Content Module. It is based on the following standards:

<b>HL7V3 NE2009</b>	<a href="#">HL7 V3 2009 Normative Edition</a>
-------------------------	---

1405 **6.3.4.8.2 Parent Template**

This content module has no parent structure.

### **6.3.4.8.3 Specification**

The chapters below identify and describe these fields, and indicate the constraints on whether or not they are required to be sent. The fields are listed in the order that they appear in the CDA

1410 XML content.

```
<entryRelationship typeCode='COMP'>
    <act classCode="ACT" moodCode="DEF">
        <templateId root='1.3.6.1.4.1.19376.1.9.1.3.9.1' /> <!-- PHARM SubstitutionPermission -->
        <code code='E' codeSystem='2.16.840.1.113883.5.1070' displayName='equivalent'
              codeSystemName='HL7 Substance Admin Substitution' />
        <statusCode code="completed"/>
    </act>
</entryRelationship>
```

1420

#### **6.3.4.8.3.1 Substitution Permission General Specification**

```
<entryRelationship typeCode='COMP'>
    <act classCode="ACT" moodCode="DEF">
        <templateId root='1.3.6.1.4.1.19376.1.9.1.3.9.1' />
    ...
</act>
</entryRelationship>
```

#### **6.3.4.8.3.2 Substitution Permission Template ID**

```
<templateId root='1.3.6.1.4.1.19376.1.9.1.3.9.1' />
```

1430 The Template ID for a Substitution Permission Content Module SHALL be provided.

#### **6.3.4.8.3.3 Substitution Permission code**

```
<code code='E' codeSystem='2.16.840.1.113883.5.1070' displayName='equivalent'  
codeSystemName='HL7 Substance Admin Substitution' />
```

- 1435 The <code> element identifies what sort of change is permitted between the therapy that was ordered and the therapy that will be provided. It SHALL be coded in HL7 terminology for substance substitution.

#### **6.3.4.8.3.4 Substitution Permission statusCode**

```
<statusCode code="completed"/>
```

The <statusCode> element SHALL be set to “completed”.

- 1440 **6.3.4.9 Reference to Medication Treatment Plan Item Content Module  
(1.3.6.1.4.1.19376.1.9.1.3.10)**

An <entryRelationship> element, containing one and only one reference to a Medication Treatment Plan Item.

#### **6.3.4.9.1 Standards**

- 1445 This part describes the general structure for a Reference to a Medication Treatment Plan Item Content Module. It is based on the following standards:

<b>HL7V3 NE2009</b>	<a href="#">HL7 V3 2009 Normative Edition</a>
-------------------------	---

#### **6.3.4.9.2 Parent Template**

- 1450 This content module has no parent structure.

#### **6.3.4.9.3 Specification**

The chapters below identify and describe these fields, and indicate the constraints on whether or not they are required to be sent. The fields are listed in the order that they appear in the CDA XML content.

- 1455

```

1460 <entryRelationship typeCode='REFR'>
    <substanceAdministration classCode='SBADM' moodCode='INT'>
        <templateId root='1.3.6.1.4.1.19376.1.9.1.3.10' />
        <id root=' ' extension=' ' />      <!-- Medication Treatment Plan Item Id -->
        <code code='MTPItem'
            codeSystem='1.3.6.1.4.1.19376.1.9.2.2'
            displayName='Medication Treatment Plan Item'
            codeSystemName='IHE Pharmacy Item Type List' />
1465     <consumable>
        <manufacturedProduct>
            <manufacturedMaterial nullFlavor='NA' />
        </manufacturedProduct>
    </consumable>
1470     <!-- Author of referenced item -->
    <author>
        :
    </author>
    <!-- Embedding of referenced item -->
1475     <entryRelationship typeCode='REFR'>
        <substanceAdministration classCode='SBADM' moodCode='INT'>
            <templateId root='2.16.840.1.113883.10.20.1.24' />
            <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.7' />
            <templateId root='1.3.6.1.4.1.19376.1.9.1.3.7' />
        <!-- ID of parent container of referenced item -->
1480         </substanceAdministration>
    </entryRelationship>
1485     <reference typeCode='XCRPT'>
        <externalDocument>
            <id root=' ' extension=' ' />
        </externalDocument>
    </reference>
</substanceAdministration>
</entryRelationship>

```

1490

### 6.3.4.9.3.1 Reference to Medication Treatment Plan Item General Specification

```

<entryRelationship typeCode='REFR'>
    <substanceAdministration classCode='SBADM' moodCode='INT'>
        <templateId root='1.3.6.1.4.1.19376.1.9.1.3.10' />
1495        ...
        <consumable>
            <manufacturedProduct>
                <manufacturedMaterial nullFlavor='NA' />
            </manufacturedProduct>
1500        </consumable>
        </substanceAdministration>
    </entryRelationship>

```

### 6.3.4.9.3.2 Reference to Medication Treatment Plan Item Template ID

<templateId root='1.3.6.1.4.1.19376.1.9.1.3.10'>

- 1505 The Template ID for a Reference to Medication Treatment Plan Item Content Module SHALL be provided.

### 6.3.4.9.3.3 Reference to Medication Treatment Plan Item ID

<id root=' ' extension=' '> <!-- Medication Treatment Plan Item Id -->

This ID represents the referenced Medication Treatment Plan Item Id and SHALL be present.

- 1510 **6.3.4.9.3.4 Reference to Medication Treatment Plan Item code**

<code code='MTPItem'  
     codeSystem='1.3.6.1.4.1.19376.1.9.2.2'  
     displayName='Medication Treatment Plan Item'  
     codeSystemName='IHE Pharmacy Item Type List'>

- 1515 This code indicates that the referenced item is a Medication Treatment Plan Item. It SHALL be present.

### 6.3.4.9.3.5 Author of the referenced item

<author>...</author>

- 1520 This element SHOULD be present and represent the author of the referenced item. It SHALL contain the author and the timestamp of the referenced item.

The table below shows the meaning of the data elements of this <author> element. It SHOULD be corresponding to the <author> element of the containing document of the referenced item, or if given, the <author> element of the section within the containing document of the referenced item.

- 1525

Data element	HL7 V3 Data Type	CDA Body position (relative XPath expression)
Author of referenced item Profession	CE	<i>author/functionCode</i>
Timestamp of referenced item	TS	<i>author/time</i>
Author of referenced item ID	II	<i>author/assignedAuthor/id</i>
Author of referenced item Specialty	CE	<i>author/assignedAuthor/code</i>
Author of referenced item Name	PN	<i>author/assignedAuthor/assignedPerson/name</i>
Author of referenced item Organization Identifier	II	<i>author/assignedAuthor/representedOrganization/id</i>

Data element	HL7 V3 Data Type	CDA Body position (relative XPath expression)
Author of referenced item Organization Name	ON	<i>author/assignedAuthor/representedOrganization/name</i>
Author of referenced item Organization Address	AD	<i>author/assignedAuthor/representedOrganization/addr</i>

#### 6.3.4.9.3.6 Embedding of referenced item

<entryRelationship typeCode='REFR'>

<substanceAdministration classCode='SBADM' moodCode='INT'>

<templateId root='2.16.840.1.113883.10.20.1.24' />

<templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.7' />

<templateId root='1.3.6.1.4.1.19376.1.9.1.3.7' />

:

</substanceAdministration>

</entryRelationship>

- 1530 An unchanged copy of the referenced Medication Treatment Plan Item MAY be present and SHALL conform to the Medication Treatment Plan Item Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.7).

Note: In case the referenced item contains internal references (e.g., an IHE PCC “Internal Reference” entry (1.3.6.1.4.1.19376.1.5.3.1.4.4.1)), a complete copy of this element could result in a broken link to the information stated in another narrative text section, if this section is not available in the targeted document. In this case the complete copy SHOULD be modified to avoid such broken links (e.g., by setting the internal reference to nullFlavor=MSK: masked, confidential, not published).

#### 6.3.4.9.3.7 ID of parent container of referenced item

1545 <reference typeCode='XCRPT'>

<externalDocument>

<id root=' ' extension=' ' />

</externalDocument>

</reference>

- 1550 The identifier of the document, the referenced item has been initially created (parent container) SHOULD be present. The presence of the parent container document id in this reference content module relieves the technical efforts in case the parent container document has to be queried and retrieved for some reason.

**6.3.4.10 Reference to Prescription Item Content Module  
(1.3.6.1.4.1.19376.1.9.1.3.11)**

1555 An <entryRelationship> element, containing one and only one reference to a Prescription (PRE) Item.

**6.3.4.10.1 Standards**

1560 This part describes the general structure for a Reference to a Prescription Item Content Module.  
It is based on the following standards:

<b>HL7V3 NE2009</b>	<a href="#">HL7 V3 2009 Normative Edition</a>
-------------------------	---

**6.3.4.10.2 Parent Template**

This content module has no parent structure.

1565 **6.3.4.10.3 Specification**

The chapters below identify and describe these fields, and indicate the constraints on whether or not they are required to be sent. The fields are listed in the order that they appear in the CDA XML content.

```

1570 <entryRelationship typeCode='REFR'>
    <substanceAdministration classCode='SBADM' moodCode='INT'>
        <templateId root='1.3.6.1.4.1.19376.1.9.1.3.11' />
        <id root=' ' extension=' ' />      <!-- Prescription Item Id -->
        <code code='PREItem'
            codeSystem='1.3.6.1.4.1.19376.1.9.2.2'
            displayName='Prescription Item'
            codeSystemName='IHE Pharmacy Item Type List' />
        <consumable>
            <manufacturedProduct>
                <manufacturedMaterial nullFlavor='NA' />
            </manufacturedProduct>
        </consumable>
        <!-- Author of referenced item -->
        <author>
            :
        </author>
        <!-- Embedding of referenced item -->
        <entryRelationship typeCode='REFR'>
            <substanceAdministration classCode='SBADM' moodCode='INT'>
                <templateId root='2.16.840.1.113883.10.20.1.24' />
                <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.7' />
                <templateId root='1.3.6.1.4.1.19376.1.9.1.3.2' />
                :
            </substanceAdministration>
        </entryRelationship>
        <!-- ID of parent container of referenced item -->
        <reference typeCode='XCRPT'>
            <externalDocument>
                <id root=' ' extension=' ' />
            </externalDocument>
        </reference>
    </substanceAdministration>
</entryRelationship>

```

#### 1605 6.3.4.10.3.1 Reference to Prescription Item General Specification

```

<entryRelationship typeCode='REFR'>
    <templateId root='1.3.6.1.4.1.19376.1.9.1.3.11' />
    <substanceAdministration classCode='SBADM' moodCode='INT'>
        ...
    <consumable>
        <manufacturedProduct>
            <manufacturedMaterial nullFlavor='NA' />
        </manufacturedProduct>
    </consumable>
    <substanceAdministration>
</entryRelationship>

```

### 6.3.4.10.3.2 Reference to Prescription Item Template ID

<templateId root='1.3.6.1.4.1.19376.1.9.1.3.11'>

- 1620 The Template ID for a Reference to Prescription Item Content Module SHALL be provided.

### 6.3.4.10.3.3 Reference to Prescription Item ID

<id root=' ' extension=' '> <!-- Prescription Item Id -->

This ID represents the referenced Prescription Item Id and SHALL be present.

### 6.3.4.10.3.4 Reference to Prescription code

- 1625 <code code='PREItem'  
           codeSystem='1.3.6.1.4.1.19376.1.9.2.2'  
           displayName='Prescription Item'  
           codeSystemName='IHE Pharmacy Item Type List'>

This code indicates that the referenced item is a Prescription Item. It SHALL be present.

- 1630 **6.3.4.10.3.5 Author of the referenced item**

<author>...</author>

This element SHOULD be present and represent the author of the referenced item. It SHALL contain the author and the timestamp of the referenced item.

- 1635 The table below shows the meaning of the data elements of this <author> element. It SHOULD be corresponding to the <author> element of the containing document of the referenced item, or if given, the <author> element of the section within the containing document of the referenced item.

Data element	HL7 V3 Data Type	CDA Body position (relative XPath expression)
Author of referenced item Profession	CE	<i>author/functionCode</i>
Timestamp of referenced item	TS	<i>author/time</i>
Author of referenced item ID	II	<i>author/assignedAuthor/id</i>
Author of referenced item Specialty	CE	<i>author/assignedAuthor/code</i>
Author of referenced item Name	PN	<i>author/assignedAuthor/assignedPerson/name</i>
Author of referenced item Organization Identifier	II	<i>author/assignedAuthor/representedOrganization/id</i>

Data element	HL7 V3 Data Type	CDA Body position (relative XPath expression)
Author of referenced item Organization Name	ON	<i>author/assignedAuthor/representedOrganization/name</i>
Author of referenced item Organization Address	AD	<i>author/assignedAuthor/representedOrganization/addr</i>

1640 **6.3.4.10.3.6 Embedding of referenced item**

```

<entryRelationship typeCode='REFR'>
  <substanceAdministration classCode='SBADM' moodCode='INT'>
    <templateId root='2.16.840.1.113883.10.20.1.24' />
    <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.7' />
    <templateId root='1.3.6.1.4.1.19376.1.9.1.3.2' />
    :
  </substanceAdministration>
</entryRelationship>
```

1650 An unchanged copy of the referenced Prescription Item MAY be present and SHALL conform to the Prescription Item Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.2).

1655 Note: In case the referenced item contains internal references (e.g., an IHE PCC “Internal Reference” entry (1.3.6.1.4.1.19376.1.5.3.1.4.4.1)), a complete copy of this element could result in a broken link to the information stated in another narrative text section, if this section is not available in the targeted document. In this case the complete copy SHOULD be modified to avoid such broken links (e.g., by setting the internal reference to nullFlavor=MSK: masked, confidential, not published).

**6.3.4.10.3.7 ID of parent container of referenced item**

```

<reference typeCode='XCRPT'>
  <externalDocument>
    <id root=' ' extension=' '/>
  </externalDocument>
</reference>
```

1660 The identifier of the document, the referenced item has been initially created (parent container) SHOULD be present. The presence of the parent container document id in this reference content

1665 module relieves the technical efforts in case the parent container document has to be queried and retrieved for some reason.

#### **6.3.4.11 Reference to Dispense Item Content Module (1.3.6.1.4.1.19376.1.9.1.3.12)**

An <entryRelationship> element, containing exactly one reference to a Dispense (DIS) Item.

##### **6.3.4.11.1 Standards**

1670 This part describes the general structure for a Reference to a Dispense Item Content Module. It is based on the following standards:

<b>HL7V3 NE2009</b>	<a href="#"><u>HL7 V3 2009 Normative Edition</u></a>
-------------------------	--

##### **6.3.4.11.2 Parent Template**

1675 This content module has no parent structure.

##### **6.3.4.11.3 Specification**

The chapters below identify and describe these fields, and indicate the constraints on whether or not they are required to be sent. The fields are listed in the order that they appear in the CDA XML content.

1680

```

1685 <entryRelationship typeCode='REFR'>
1686   <supply classCode='SPLY' moodCode='EVN'>
1687     <templateId root='1.3.6.1.4.1.19376.1.9.1.3.12' />
1688     <id root=' ' extension=' ' />      <!-- Dispense Item Id -->
1689     <code code='DISItem'
1690       codeSystem='1.3.6.1.4.1.19376.1.9.2.2'
1691       displayName='Dispense Item'
1692       codeSystemName='IHE Pharmacy Item Type List' />
1693     <!-- Author of referenced item -->
1694     <author>
1695       :
1696     </author>
1697     <!-- Embedding of referenced item -->
1698     <entryRelationship typeCode='REFR'>
1699       <supply classCode='SPLY' moodCode='EVN'>
1700         <templateId root='2.16.840.1.113883.10.20.1.34' />
1701         <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.7.3' />
1702         <templateId root='1.3.6.1.4.1.19376.1.9.1.3.4' />
1703         :
1704       </supply>
1705     </entryRelationship>
1706     <!-- ID of parent container of referenced item -->
1707     <reference typeCode='XCRPT'>
1708       <externalDocument>
1709         <id root=' ' extension=' ' />
1710       </externalDocument>
1711     </reference>
1712   </supply>
1713 </entryRelationship>

```

#### 1710 **6.3.4.11.3.1 Reference to Dispense Item General Specification**

```

<entryRelationship typeCode='REFR'>
  <supply classCode='SPLY' moodCode='EVN'>
    ...
  </supply>
</entryRelationship>

```

1715 </entryRelationship>

#### **6.3.4.11.3.2 Reference to Dispense Item Template ID**

<templateId root='1.3.6.1.4.1.19376.1.9.1.3.12' />

The Template ID for a Reference to Dispense Item Content Module SHALL be provided.

#### **6.3.4.11.3.3 Reference to Dispense Item ID**

1720 <id root=' ' extension=' ' /> <!-- Dispense Item Id -->

This ID represents the referenced Dispense Item Id and SHALL be present.

#### **6.3.4.11.3.4 Reference to Dispense Item code**

```

<code code='DISItem'
      codeSystem='1.3.6.1.4.1.19376.1.9.2.2'
      displayName='Dispense Item'
      codeSystemName='IHE Pharmacy Item Type List' />

```

This code indicates that the referenced item is a Dispense Item. It SHALL be present.

#### 6.3.4.11.3.5 Author of the referenced item

<author>...</author>

1730 This element SHOULD be present and represent the author of the referenced item. It SHALL contain the author and the timestamp of the referenced item.

The table below shows the meaning of the data elements of this <author> element. It SHOULD be corresponding to the <author> element of the containing document of the referenced item, or if given, the <author> element of the section within the containing document of the referenced item.

1735

Data element	HL7 V3 Data Type	CDA Body position (relative XPath expression)
Author of referenced item Profession	CE	<i>author/functionCode</i>
Timestamp of referenced item	TS	<i>author/time</i>
Author of referenced item ID	II	<i>author/assignedAuthor/id</i>
Author of referenced item Specialty	CE	<i>author/assignedAuthor/code</i>
Author of referenced item Name	PN	<i>author/assignedAuthor/assignedPerson/name</i>
Author of referenced item Organization Identifier	II	<i>author/assignedAuthor/representedOrganization/id</i>
Author of referenced item Organization Name	ON	<i>author/assignedAuthor/representedOrganization/name</i>
Author of referenced item Organization Address	AD	<i>author/assignedAuthor/representedOrganization/addr</i>

#### 6.3.4.11.3.6 Embedding of referenced item

<entryRelationship typeCode='REFR'>

  <supply classCode='SPLY' moodCode='EVN'>

1740    <templateId root='2.16.840.1.113883.10.20.1.34' />

    <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.7.3' />

    <templateId root='1.3.6.1.4.1.19376.1.9.1.3.4' />

    :

  </supply>

1745 </entryRelationship>

An unchanged copy of the referenced Dispense Item MAY be present and SHALL conform to the Dispense Item Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.4).

Note: In case the referenced item contains internal references (e.g., an IHE PCC “Internal Reference” entry (1.3.6.1.4.1.19376.1.5.3.1.4.4.1)), a complete copy of this element could result

1750 in a broken link to the information stated in another narrative text section, if this section is not available in the targeted document. In this case the complete copy SHOULD be modified to avoid such broken links (e.g., by setting the internal reference to nullFlavor=MSK: masked, confidential, not published).

#### **6.3.4.11.3.7 ID of parent container of referenced item**

1755 <reference typeCode='XCRPT'>  
    <externalDocument>  
        <id root=' ' extension=' '/>  
    </externalDocument>  
</reference>

1760 The identifier of the document, the referenced item has been initially created (parent container) SHOULD be present. The presence of the parent container document id in this reference content module relieves the technical efforts in case the parent container document has to be queried and retrieved for some reason.

#### **6.3.4.12 Reference to Pharmaceutical Advice Item Content Module (1.3.6.1.4.1.19376.1.9.1.3.13)**

1765 An <entryRelationship> element, containing one and only one reference to a Pharmaceutical Advice (PADV) Item.

#### **6.3.4.12.1 Standards**

This part describes the general structure for a Reference to a Pharmaceutical Advice Item Content Module. It is based on the following standards:

<b>HL7V3 NE2009</b>	<a href="#">HL7 V3 2009 Normative Edition</a>
-------------------------	---

#### **6.3.4.12.2 Parent Template**

This content module has no parent structure.

1775 **6.3.4.12.3 Specification**

The chapters below identify and describe these fields, and indicate the constraints on whether or not they are required to be sent. The fields are listed in the order that they appear in the CDA XML content.

```

1780 <entryRelationship typeCode='REFR'>
    <observation classCode='OBS' moodCode='EVN'>
        <templateId root='1.3.6.1.4.1.19376.1.9.1.3.13' />
        <id root=' ' extension=' ' />      <!-- Pharmaceutical Advice Item Id -->
        <code code='PADVItem'
            codeSystem='1.3.6.1.4.1.19376.1.9.2.2'
            displayName='Pharmaceutical Advice Item'
            codeSystemName='IHE Pharmacy Item Type List' />
        <!-- Author of referenced item -->
        <author>
            :
        </author>
        <!-- Embedding of referenced item -->
        <entryRelationship typeCode='REFR'>
            <observation classCode='OBS' moodCode='EVN'>
                <templateId root='2.16.840.1.113883.10.20.1.34' />
                <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.7.3' />
                <templateId root='1.3.6.1.4.1.19376.1.9.1.3.4' />
                :
            </observation>
        </entryRelationship>
        <!-- ID of parent container of referenced item -->
        <reference typeCode='XCRPT'>
            <externalDocument>
                <id root=' ' extension=' ' />
            </externalDocument>
        </reference>
    </observation>
</entryRelationship>
```

1810 **6.3.4.12.3.1 Reference to Pharmaceutical Advice Item General Specification**

```

<entryRelationship typeCode='REFR'>
    <observation classCode='OBS' moodCode='EVN'>
        ...
    </observation>
</entryRelationship>
```

1815    </entryRelationship>

**6.3.4.12.3.2 Reference to Pharmaceutical Advice Item Template ID**

<templateId root='1.3.6.1.4.1.19376.1.9.1.3.13' />

1820 The Template ID for a Reference to Pharmaceutical Advice Item Content Module SHALL be provided.

### 6.3.4.12.3.3 Reference to Pharmaceutical Advice Item ID

`<id root=' ' extension=' '/> <!-- Pharmaceutical Advice Item Id -->`

This ID represents the referenced Pharmaceutical Advice Item Id and SHALL be present.

1825    **6.3.4.12.3.4 Reference to Pharmaceutical Advice Item code**

`<code code='PADVItem'  
      codeSystem='1.3.6.1.4.1.19376.1.9.2.2'  
      displayName='Pharmaceutical Advice Item'  
      codeSystemName='IHE Pharmacy Item Type List' />`

1830    This code indicates that the referenced item is a Pharmaceutical Advice Item. It SHALL be present.

### 6.3.4.12.3.5 Author of the referenced item

`<author>...</author>`

1835    This element SHOULD be present and represent the author of the referenced item. It SHALL contain the author and the timestamp of the referenced item.

The table below shows the meaning of the data elements of this `<author>` element. It SHOULD be corresponding to the `<author>` element of the containing document of the referenced item, or if given, the `<author>` element of the section within the containing document of the referenced item.

1840

Data element	HL7 V3 Data Type	CDA Body position (relative XPath expression)
Author of referenced item Profession	CE	<code>author/functionCode</code>
Timestamp of referenced item	TS	<code>author/time</code>
Author of referenced item ID	II	<code>author/assignedAuthor/id</code>
Author of referenced item Specialty	CE	<code>author/assignedAuthor/code</code>
Author of referenced item Name	PN	<code>author/assignedAuthor/assignedPerson/name</code>
Author of referenced item Organization Identifier	II	<code>author/assignedAuthor/representedOrganization/id</code>
Author of referenced item Organization Name	ON	<code>author/assignedAuthor/representedOrganization/name</code>

Data element	HL7 V3 Data Type	CDA Body position (relative XPath expression)
Author of referenced item Organization Address	AD	<i>author/assignedAuthor/representedOrganization/addr</i>

#### 6.3.4.12.3.6 Embedding of referenced item

<entryRelationship typeCode='REFR'>

1845      <observation classCode='OBS' moodCode='EVN'>  
               <templateId root='1.3.6.1.4.1.19376.1.9.1.3.3'>  
               :  
               </observation>

</entryRelationship>

1850      An unchanged copy of the referenced Pharmaceutical Advice Item MAY be present and SHALL conform to the Pharmaceutical Advice Item Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.3).

Note: In case the referenced item contains internal references (e.g., an IHE PCC “Internal Reference” entry (1.3.6.1.4.1.19376.1.5.3.1.4.4.1)), a complete copy of this element could result in a broken link to the information stated in another narrative text section, if this section is not available in the targeted document. In this case the complete copy SHOULD be modified to avoid such broken links (e.g., by setting the internal reference to nullFlavor=MSK: masked, confidential, not published).

#### 6.3.4.12.3.7 ID of parent container of referenced item

1860      <reference typeCode='XCRPT'>  
               <externalDocument>  
               <id root=' ' extension=' '/>  
               </externalDocument>  
               </reference>

1865      The identifier of the document, the referenced item has been initially created (parent container) SHOULD be present. The presence of the parent container document id in this reference content module relieves the technical efforts in case the parent container document has to be queried and retrieved for some reason.

1870 **6.3.4.13 Reference to Medication Administration Item Content Module  
(1.3.6.1.4.1.19376.1.9.1.3.14)**

An <entryRelationship> element, containing one and only one reference to a Medication Administration (CMA) Item.

**6.3.4.13.1 Standards**

- 1875 This part describes the general structure for a Reference to a Medication Administration Item Content Module. It is based on the following standards:

<b>HL7V3 NE2009</b>	<a href="#">HL7 V3 2009 Normative Edition</a>
-------------------------	---

**6.3.4.13.2 Parent Template**

This content module has no parent structure.

1880 **6.3.4.13.3 Specification**

The chapters below identify and describe these fields, and indicate the constraints on whether or not they are required to be sent. The fields are listed in the order that they appear in the CDA XML content.

```

1885 <entryRelationship typeCode='REFR'>
    <substanceAdministration classCode='SBADM' moodCode='EVN'>
        <templateId root='1.3.6.1.4.1.19376.1.9.1.3.14' />
        <id root=' ' extension=' ' />      <!-- Medication Administration Item Id -->
        <code code='CMAItem'
            codeSystem='1.3.6.1.4.1.19376.1.9.2.2'
            displayName='Medication Administration Item'
            codeSystemName='IHE Pharmacy Item Type List' />
        <consumable>
            <manufacturedProduct>
                <manufacturedMaterial nullFlavor='NA' />
            </manufacturedProduct>
        </consumable>
        <!-- Author of referenced item -->
        <author>
            :
        </author>
        <!-- Embedding of referenced item -->
        <entryRelationship typeCode='REFR'>
            <substanceAdministration classCode='SBADM' moodCode='EVN'>
                <templateId root='2.16.840.1.113883.10.20.1.24' />
                <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.7' />
                <templateId root='1.3.6.1.4.1.19376.1.9.1.3.16' />
                :
            </substanceAdministration>
        </entryRelationship>
        <!-- ID of parent container of referenced item -->
        <reference typeCode='XCRPT'>
            <externalDocument>
                <id root=' ' extension=' ' />
            </externalDocument>
        </reference>
    </substanceAdministration>
</entryRelationship>

```

#### 1920    **6.3.4.13.3.1 Reference to Medication Administration Item General Specification**

```

<entryRelationship typeCode='REFR'>
    <substanceAdministration classCode='SBADM' moodCode='EVN'>
        ...

```

```

        <consumable>
            <manufacturedProduct>
                <manufacturedMaterial nullFlavor='NA' />
            </manufacturedProduct>
        </consumable>
    </substanceAdministration>
</entryRelationship>

```

#### 1930    **6.3.4.13.3.2 Reference to Medication Administration Item Template ID**

```
<templateId root='1.3.6.1.4.1.19376.1.9.1.3.14' />
```

The Template ID for a Reference to Medication Administration Item Content Module SHALL be provided.

1935

#### **6.3.4.13.3.3 Reference to Medication Administration Item ID**

```
<id root=' ' extension=' '/> <!-- Medication Administration Item Id -->
```

This ID represents the referenced Medication Administration Item Id and SHALL be present.

#### **6.3.4.13.3.4 Reference to Medication Administration Item code**

1940

```
<code code='CMAItem'  
      codeSystem='1.3.6.1.4.1.19376.1.9.2.2'  
      displayName='Medication Administration Item'  
      codeSystemName='IHE Pharmacy Item Type List' />
```

This code indicates that the referenced item is a Medication Administration Item. It SHALL be present.

1945

#### **6.3.4.13.3.5 Author of the referenced item**

```
<author>...</author>
```

This element SHOULD be present and represent the author of the referenced item. It SHALL contain the author and the timestamp of the referenced item.

1950

The table below shows the meaning of the data elements of this `<author>` element. It SHOULD be corresponding to the `<author>` element of the containing document of the referenced item, or if given, the `<author>` element of the section within the containing document of the referenced item.

Data element	HL7 V3 Data Type	CDA Body position (relative XPath expression)
Author of referenced item Profession	CE	<i>author/functionCode</i>
Timestamp of referenced item	TS	<i>author/time</i>
Author of referenced item ID	II	<i>author/assignedAuthor/id</i>
Author of referenced item Specialty	CE	<i>author/assignedAuthor/code</i>
Author of referenced item Name	PN	<i>author/assignedAuthor/assignedPerson/name</i>
Author of referenced item Organization Identifier	II	<i>author/assignedAuthor/representedOrganization/id</i>
Author of referenced item Organization Name	ON	<i>author/assignedAuthor/representedOrganization/name</i>

Data element	HL7 V3 Data Type	CDA Body position (relative XPath expression)
Author of referenced item Organization Address	AD	<i>author/assignedAuthor/representedOrganization/addr</i>

#### 6.3.4.13.3.6 Embedding of referenced item

1955      <entryRelationship typeCode='REFR'>  
               <substanceAdministration classCode='SBADM' moodCode='EVN'>  
                   <templateId root='2.16.840.1.113883.10.20.1.24' />  
                   <templateId root='1.3.6.1.4.1.19376.1.5.3.1.4.7' />  
                   <templateId root='1.3.6.1.4.1.19376.1.9.1.3.16' />  
  
  1960        :  
               </substanceAdministration>  
               </entryRelationship>

An unchanged copy of the referenced Medication Administration Item MAY be present and SHALL conform to the Medication Administration Item Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.16).

1965        Note: In case the referenced item contains internal references (e.g., an IHE PCC “Internal Reference” entry (1.3.6.1.4.1.19376.1.5.3.1.4.4.1)), a complete copy of this element could result in a broken link to the information stated in another narrative text section, if this section is not available in the targeted document. In this case the complete copy SHOULD be modified to avoid such broken links (e.g., by setting the internal reference to nullFlavor=MSK: masked, confidential, not published).

#### 6.3.4.13.3.7 ID of parent container of referenced item

1970        <reference typeCode='XCRPT'>  
               <externalDocument>  
                   <id root=' ' extension=' ' />  
               </externalDocument>  
       1975        </reference>

1980        The identifier of the document, the referenced item has been initially created (parent container) SHOULD be present. The presence of the parent container document id in this reference content module relieves the technical efforts in case the parent container document has to be queried and retrieved for some reason.

### **6.3.4.14 Renewal Period Content Module (1.3.6.1.4.1.19376.1.9.1.3.15)**

1985 Renewal Period Content Module describes the possible renewal of a Prescription Item in terms of duration or period of time (start / end date).

#### **6.3.4.14.1 Standards**

This part describes the general structure for a Renewal period. It is based on the following standards:

<b>HL7V3 NE2009</b>	<a href="#">HL7 V3 2009 Normative Edition</a>
<b>CDAR2</b>	<a href="#">HL7 CDA Release 2.0</a>

1990 **6.3.4.14.1 Parent Template**

This content module has no parent structure.

#### **6.3.4.14.2 Specification**

The chapters below identify and describe the fields, and indicate the constraints on whether or not they are required to be sent. The fields are listed in the order that they appear in the CDA XML content.

1995

```
<entryRelationship typeCode="COMP">
  <supply classCode="SPLY" moodCode="RQO">
    <templateId root="1.3.6.1.4.1.19376.1.9.1.3.15"/>
    <!-- allowed renewal period for the Prescription Item -->
    <effectiveTime xsi:type="IVL_TS">
      <low value="20170601"/> <!-- optional -->
      <high value="20170801"/>
      <!-- OR -->
      <low value="20170601"/> <!-- optional -->
      <width value="3" unit="mo"/>
    </effectiveTime>
  </supply>
</entryRelationship>
```

2000

2005 **6.3.4.14.2.1 Renewal Period General Specification**

```
<entryRelationship typeCode="COMP">
  <supply classCode="SPLY" moodCode="RQO">
    <templateId root="1.3.6.1.4.1.19376.1.9.1.3.15"/> <!-- PHARM -->
    <effectiveTime xsi:type="IVL_TS">
      ...
    </effectiveTime>
  </supply>
```

2015

</entryRelationship>

#### **6.3.4.14.2.2 Renewal Period Template ID**

2020    <templateId root='1.3.6.1.4.1.19376.1.9.1.3.15'>

The Template ID for the Renewal Period SHALL be provided.

#### **6.3.4.14.2.3 Renewal Period effectiveTime**

<effectiveTime xsi:type="IVL\_TS">

    <low value="..."/> <!-- optional -->

2025    <high value="..."/>

</effectiveTime>

-- or --

<effectiveTime xsi:type="IVL\_TS">

    <low value="..."/> <!-- optional -->

2030    <width value="..." unit="..."/>

</effectiveTime>

The renewal period SHALL be defined by the “effectiveTime” element.

In case the renewal period is bound by a precise date, the first form of interval SHALL be used.

When using this form, the “high” value (ending date) SHALL be specified and the “low” value (starting date) MAY be specified.

2035

In case the renewal period is known in terms of duration, the second form of interval SHALL be used. When using this form the “width” (period of time) SHALL be specified and the “low” (starting date) MAY be specified.

2040 **6.5 PHARM Value Sets**

<i>Add Section 6.5.3</i>
--------------------------

**6.5.3 IHE Pharmacy Item Type List**

The Pharmacy Item Type List is used in the Prescription Item Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.2), the Dispense Item Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.4) and in the Pharmaceutical Advice Item Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.3) for explicitly indicating to which kind of item a reference (entryRelationship with typeCode='REFR') points to.

code: see column “Code”

2050 codeSystem: **1.3.6.1.4.1.19376.1.9.2.2**

codeSystemName: **IHE Pharmacy Item Type List**

Code	Display Name
MTPItem	Medication Treatment Plan Item
PREItem	Prescription Item
DISItem	Dispense Item
PADVItem	Pharmaceutical Advice Item
CMAItem	Medication Administration Item

# Appendices

2055 **Appendix A Validating CDA Documents using the Framework**

**A.1 Validating Documents**

For validation of document content modules please refer to PCC TF-2: Appendix B.1.

**A.2 Validating Sections**

For validation of section content modules please refer to PCC-TF 2: Appendix B.2.

2060 **A.3 Phases of Validation and Types of Errors**

For the phases of validation and types of errors please refer to PCC TF-2: Appendix B.3.

## Appendix B Extensions to CDA Release 2

### B.1 IHE PHARM Extensions

2065 All Extensions to CDA Release 2.0 created by the IHE PHARM Technical Committee are in the namespace `urn:ihe:pharm`.

The approach used to create extension elements created for the PHARM Technical Framework is the same as was used for the PCC Technical Framework, the HL7 Care Record Summary (see Appendix E) and the ASTM/HL7 Continuity of Care Document (see Section 7.2).


#### B.1.1 Used for Medicine Entry Content Module

2070 The extensions of CDA Release 2 used for the Medicine Entry Content Module are derived of a medication structure based on a standard HL7 V3 Common Message Element Type (CMET) created by the HL7 Pharmacy group. The used CMET is “**R\_Medication Universal**” (**COCT\_MT230100UV**), **Release 2** and fits within the overall entry by extending the “Manufactured Product” structure of the CDA “substanceAdministration” branch.

2075 This structure is part of the HL7 V3 2009 Normative Edition (COCT\_RM230100UV). The incorporation of this structure is done according to Section **1.4 CDA Extensibility** of the HL7 CDA standard. Such an extension of the base CDA standard is an accepted practice in IHE (e.g., in the XD\* Lab specification).

2080 The rules of Section **1.4 CDA Extensibility** require the designation of a new XML namespace for the XML elements in this structure. For the purposes of documentation, the **namespace** `urn:ihe:pharm` shall be used.

	<pre> &lt;manufacturedMaterial xmlns:pharm="urn:ihe:pharm" classCode="MMAT" determinerCode="KIND"&gt;     &lt;templateId root="1.3.6.1.4.1.19376.1.9.1.3.1"/&gt;     &lt;!-- National medicinal product code (brand-level) --&gt;     &lt;code code="" displayName="" codeSystem="" codeSystemName="" /&gt;     &lt;!-- Brand name --&gt;     &lt;name&gt;... &lt;/name&gt;     &lt;!-- Pharmaceutical dose form --&gt;     &lt;pharm:formCode code="" displayName="" codeSystem="" codeSystemName="" /&gt;     &lt;lotNumberText&gt;...&lt;/lotNumberText&gt;     &lt;pharm:expirationTime value=' '/&gt;     &lt;!-- Container information --&gt;     &lt;pharm:asContent classCode="CONT"&gt;         &lt;pharm:containerPackagedMedicine classCode="CONT" determinerCode="INSTANCE"&gt;             &lt;!-- Medicinal product code (package-level) --&gt;             &lt;pharm:code code="" displayName="" codeSystem="" codeSystemName="" /&gt;             &lt;!-- Brand name (package) --&gt;             &lt;pharm:name&gt;...&lt;/pharm:name&gt;             &lt;pharm:formCode code="" displayName="" codeSystem="" codeSystemName="" /&gt;             &lt;pharm:capacityQuantity value="" unit="" /&gt;             &lt;pharm:asSuperContent&gt;                 &lt;pharm:containerPackagedMedicine classCode='CONT'                     determinerCode='INSTANCE'&gt;                     &lt;pharm:capacityQuantity value=' ' unit=' '/&gt;                 &lt;/pharm:containerPackagedMedicine&gt;             &lt;/pharm:asSuperContent&gt;         &lt;/pharm:containerPackagedMedicine&gt;     &lt;/pharm:asContent&gt;     : &lt;/manufacturedMaterial&gt; </pre>
2085	
2090	
2095	
2100	
2105	
2110	
2115	<p>The detailed usage is shown in the specification of the Medicine Entry Content Module (1.3.6.1.4.1.19376.1.9.1.3.1) within the PHARM Technical Framework.</p>

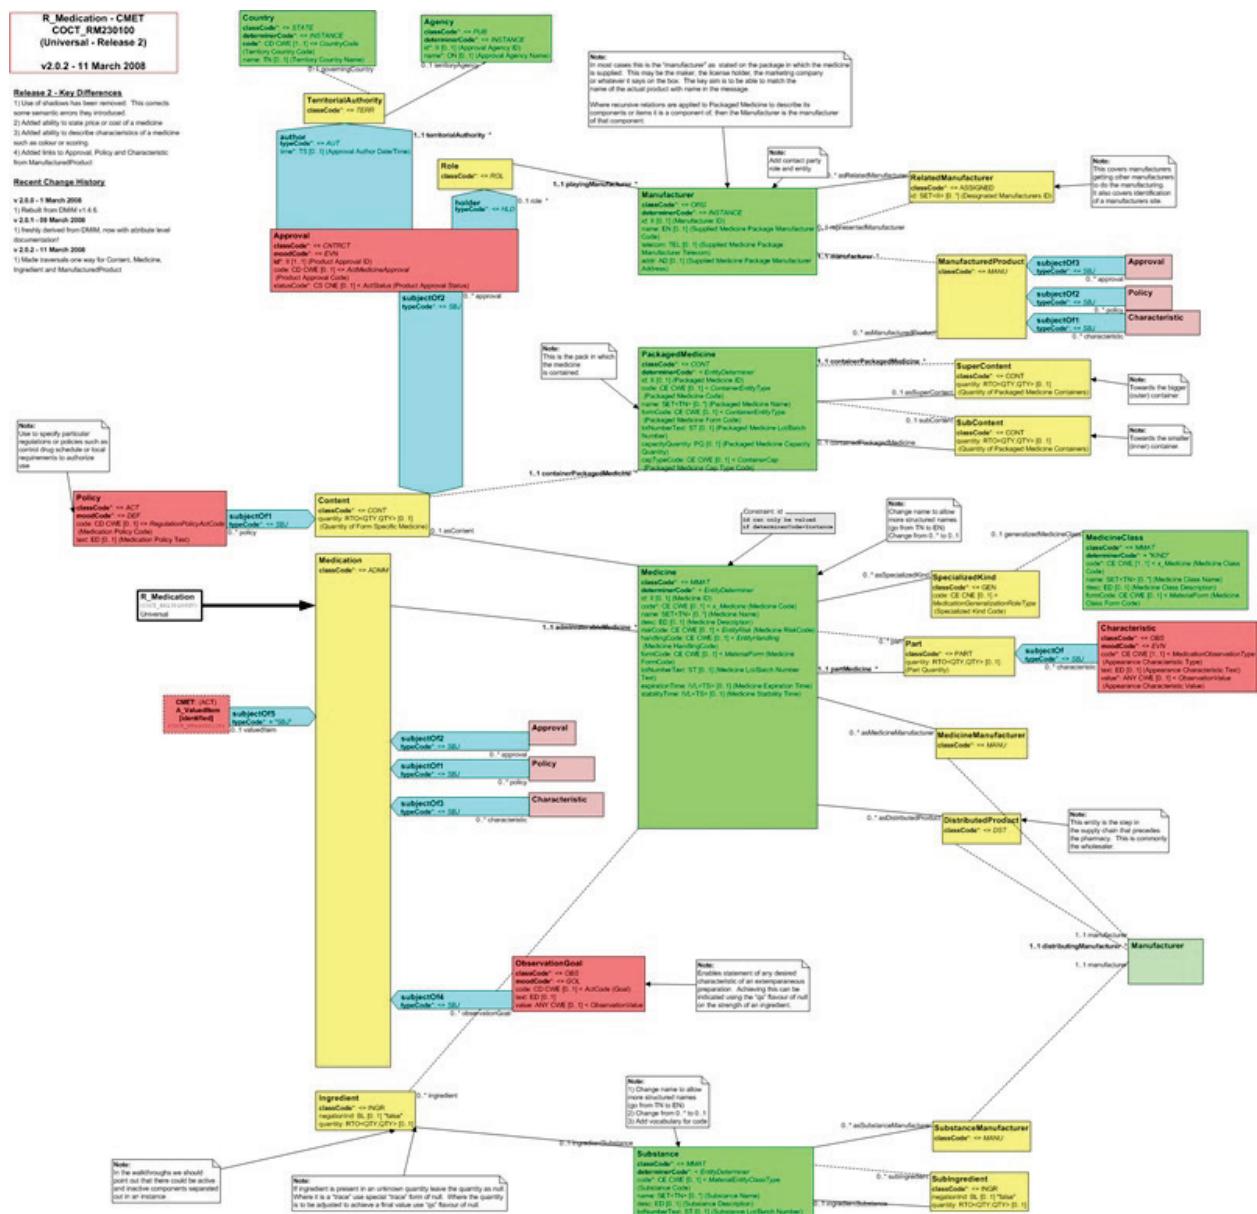

2120 **Volume 3 Namespace Additions**

*Add the following terms to the IHE Namespace:*

- Community Prescription (PRE) Document Content Module
  - 1.3.6.1.4.1.19376.1.9.1.1.1
- Prescription Section Content Module
  - 1.3.6.1.4.1.19376.1.9.1.2.1
- 2125 • Medicine Entry Content Module
  - 1.3.6.1.4.1.19376.1.9.1.3.1
- Prescription Item Entry Content Module
  - 1.3.6.1.4.1.19376.1.9.1.3.2
- 2130 • Dosage Instructions Content Module
  - 1.3.6.1.4.1.19376.1.9.1.3.6
- Amount of units of the consumable Content Module
  - 1.3.6.1.4.1.19376.1.9.1.3.8
- Substitution Permission Content Module
  - 1.3.6.1.4.1.19376.1.9.1.3.9.1
- 2135 • Reference to Medication Treatment Plan Item Content Module
  - 1.3.6.1.4.1.19376.1.9.1.3.10
- Reference to Prescription Item Content Module
  - 1.3.6.1.4.1.19376.1.9.1.3.11
- 2140 • Reference to Dispense Item Content Module
  - 1.3.6.1.4.1.19376.1.9.1.3.12
- Reference to Pharmaceutical Advice Item Content Module
  - 1.3.6.1.4.1.19376.1.9.1.3.13
- Reference to Medication Administration Item Content Module
  - 1.3.6.1.4.1.19376.1.9.1.3.14
- 2145 • Renewal Period Content Module
  - 1.3.6.1.4.1.19376.1.9.1.3.15